

# ARCA 304021 No MP



Sample image

**Order symbol:** ARCA 304021 No MP

**Product nbr:** 8120023N

**Description:** Cabinet. PC


**Remarks:** Grey cover. 2-point locking. hinges on the short side

**EAN:** 6418074089427

**El. number:**

- Finland:
- Denmark:
- Sweden:

**Including:** Cabinet base. door with PUR gasket. 3mm double bit lock(s) with key. S versions with swinghandle 2-point locking system. Door guide included.

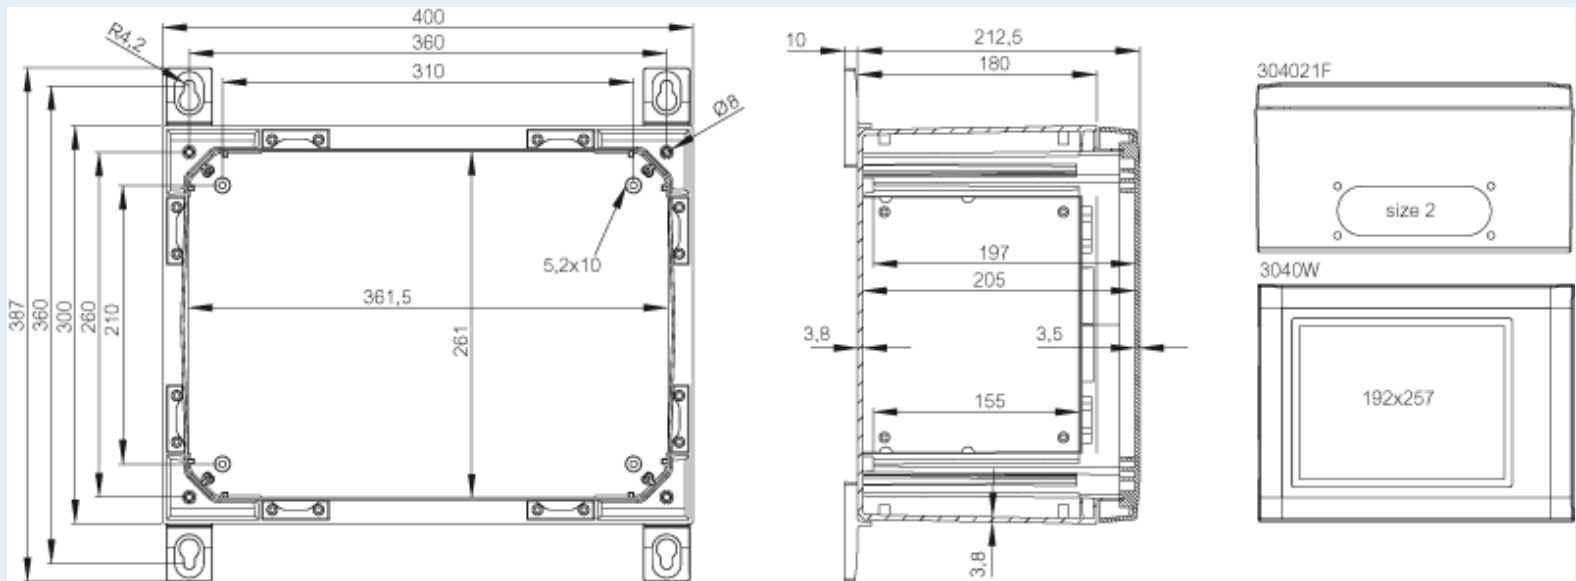

Dimensions:	Height	Width	Depth
mm:	300	400	210
inch:	11.81	15.75	8.27

**Materials:**

Material: Polycarbonate  
Base colour: RAL 7035 -light grey

**Accessories:**

DRS ARCA 304021	DIN rail frame set (385 x 285 x 35)
SBK ARCA 30	Support bar kit (235 x 40 x 30)
DSP ARCA HRS	Door stopper ARCA. horizontal. right. small
DSP ARCA HLS	Door stopper ARCA. horizontal. left. small

Cover colour: RAL 7035 -light grey  
Gasket material: Polyurethane

**Temperatures:**

Temperature °C (short term):: -40 ... 120  
Temperature °C (continuous): -40 ... 80  
Temperature °F (short term): -40 ... 250  
Temperature °F (continuous): -40 ... 175

SBK ARCA 40	Support bar kit (340 x 40 x 30)
IDS ARCA 3040	Inner door set (285 x 385 x 35)
RCS ARCA 3040	Rain canopy set for size 3040 (20 x 400 x 30)
PMK ARCA 40	PoleMounting kit. for pole ø100-300mm (385 x 285 x 35)
MPP ARCA 3040	Mounting plate perforated (350x250x2 mm - 26x11 mm) (250 x 350 x 2)
MPMP ARCA 4030	Mounting plate multiperforated (350x250x2 mm - ø3.6 mm) (350 x 250 x 2)
MPS ARCA 4030	Mounting plate (350x250x2 mm) (350 x 250 x 2)
MPX ARCA 4030	Mounting plate (350x250 mm) (350 x 250 x 5)

**Rating:**

Ingress protection (EN 60529):	IP66;
Impact Resistance (EN 62262):	IK10;
Electrical insulation:	Totally insulated
Halogen free (DIN/VDE 0472, Part 815):	1
UV resistance:	UL 508
Flammability Rating:	UL 94 5VA
Glow Wire Test (IEC 695-2-1) °C:	960 °C
NEMA Class	NEMA 1, 4, 4X, 12 and 13

**Certificates:**

Certificate FI 40467