


1 2 3 4 5 6 7

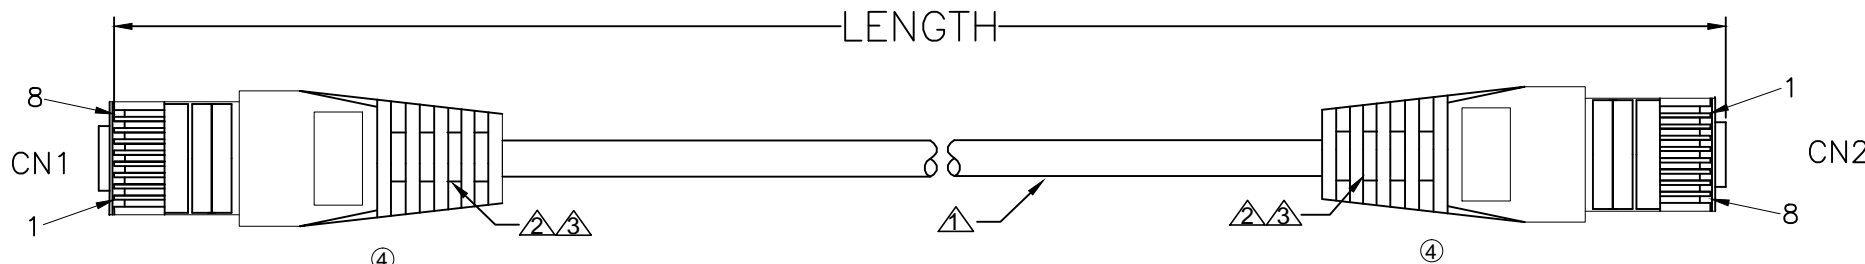


Order code:  
DK-1511-XXX/XX


color:  
BL(black),WH(white),B(blue),G(grey)

Length: see table ①

PIN OUT

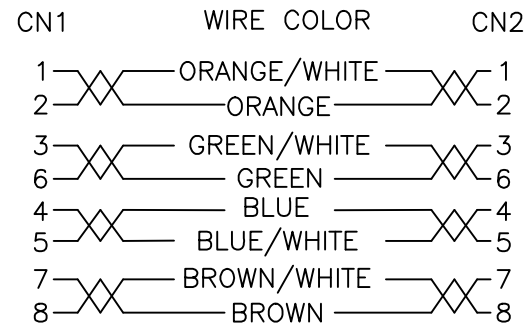

① Length	Feet	mm	tolerance (mm) ③
001	1	305	+30.5/-15.3
003	3	914	+45.8/-36.6
005	5	1524	±45.8
007	7	2134	±64.1
010	10	3048	±91.5
015	15	4572	±137.3
020	20	6096	±183
025	25	7620	±228.8
050	50	15240	±457.5
100	100	30480	±915

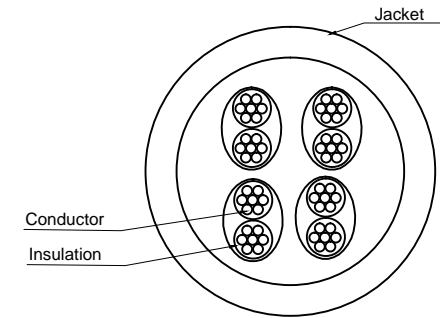

Electrical  
Open/short/intermittence:100%  
Dielectric strength: 2.5KV DC-2seconds.  
The operating temperature: -20°C~+60°C

④		Molding PVC	2	Molding PVC 65P
④		RJ45 CONN	2	RJ45 8P8C, contacts 3u" gold-plated Un-shielded PC UL94V-2
④		CABLE	1	CAT 5E U/UTP(24AWGx1PR)*4+PVC Jacket OD:5.2±0.3mm
NO.	NAME.	Q'TY	SPECIFICATION	

**RoHS compliant**  
Unit: mm

Scale	Free				Date	Name	Customer-No.
TOLERANCE	④	Change the plant	12.04.2022	Luca	Drawn	24.06.2014	Joanna
X.	±X	③	Add tolerance for cable length	20.09.2019	Amy	Approved	12.04.2022
X.X		②	Add new length version	06.04.2017	Amy		
X.XX		①	Update length version	07.12.2016	Amy		
DIM	TOL	①	Update length version	07.12.2016	Amy		
X.°		①	Update length version	07.12.2016	Amy		
		①	Drawn	24.06.2014	Joanna		
Angle	TOL	Id.	Modification	Date	Name		



ASSMANN WSW-No.  
**DK-1511-XXX/XX**

Drawing-No.  
**ASS 7160 CA** rev04

Replace SHEET

1 2 3 4 5 6 7