


① Cable White print
 AWM STYLE 2725 80°C 30V VW-1 28AWG/1P 24AWG/2C
 ---c AWM I/II A 80°C 30V FT1 USB CABLE


- Electrical test:
- 100% short, open, miss wire test
 - Conduct resistance: 2 Ohm max.
 - Insulator resistance: 5Mohm min.
 - Dielectric test: DC 300V

WSW P/N	Jacket color	Length(mm)
③ AK669/2-03-BLACK	Black	300±15
② AK669/2-05-BLACK	Black	500±15
③ AK669/2-10-BLACK	Black	1000±30
③ AK669/2-15-BLACK	Black	1500±40

WSW P/N	Jacket color	Length(mm)
AK669/2-18-BLACK	Black	1800±50
AK669/2-30-BLACK	Black	3000±50
AK669/2-50-BLACK	Black	5000±50

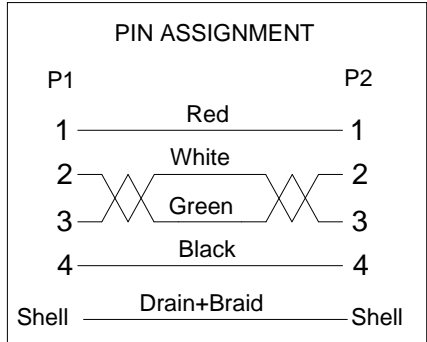

NO.	NAME.	Q'TY	SPECIFICATION
⑦	Inner Jacket	NA	LD-PE
⑥	PE Bag	1	Clear Print black "MADE IN CHINA"+ "1PC"
⑤	TIE	1	Black
④	Out Jacket	NA	Black PVC-45P
③	CONN	1	USB A Female Shell:Nickel Pin:G/F Insulator color:White, short type
②	CONN	1	USB A Male Shell:Nickel Pin:G/F Insulator color:White
①	Cable	1	USB2.0 UL2725 28#/1P+24#/2C+AEB OD:4.7mm Black

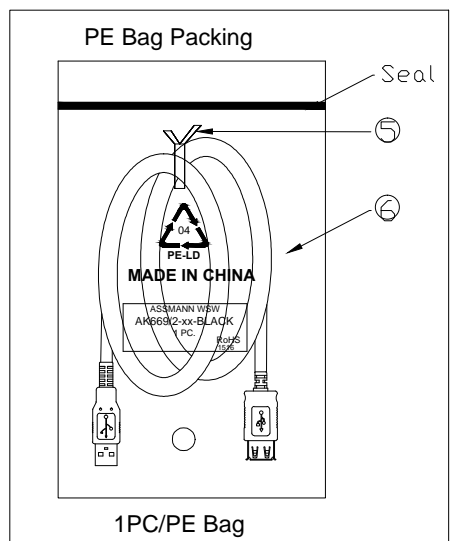

RoHS compliant
 Unit: mm

Scale	Free					Date	Name	Customer-No.
TOLERANCE					Drawn	18.11.2014	Joanna	
		③	Add new length version	05.05.2019	Xavier	Approved	20.01.2017	ASSMANN WSW-No. AK669/2-xx-BLACK
		②	Add new length version	20.01.2017	Amy			
DIM	TOL	①	Update the drawing	09.05.2016	Amy			Drawing-No. ASS 7241 CA rev03
		①	Drawn	18.11.2014	Joanna			Replace Sheet 1/1
Angle	TOL	Id.	Modification	Date	Name			