


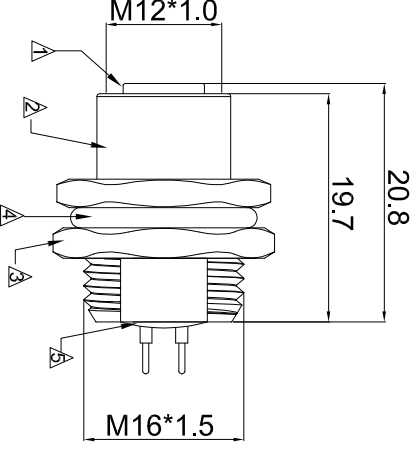


1	2	3	4	5	6	7																														
A																																				
B																																				
C																																				
D																																				
E	<p>RECOMMENDED PCB LAYOUT</p> <p>Notes: ② Detailed Product Description: 1. Waterproof connector rating is IP67/IP68 ② 2. Unshielded.</p> <p>Electrical Character: 2. Rating Voltage: 250V AC/DC. 3. Insulation Resistance: >100MΩ. 4. Rating Current: 4A. 5. Contact Resistance of connector: ≤10mΩ. 6. Mating Cycle: 100 times Min, 500 times Max. 7. Operating temperature: -25°C ~ +85°C.</p>																																			
F	<table border="1"> <thead> <tr> <th>ITEM</th> <th>Date</th> <th>Name</th> <th>QTY</th> <th>UNIT</th> </tr> </thead> <tbody> <tr> <td>△</td> <td>10.07.2018</td> <td>Segal</td> <td>2</td> <td>G</td> </tr> <tr> <td>△</td> <td>06.09.2019</td> <td>Any</td> <td>1</td> <td>PCS</td> </tr> <tr> <td>△</td> <td></td> <td></td> <td>1</td> <td>PCS</td> </tr> <tr> <td>△</td> <td></td> <td></td> <td>1</td> <td>PCS</td> </tr> <tr> <td>①</td> <td></td> <td></td> <td>1</td> <td>SET</td> </tr> </tbody> </table> <p>SPECIFICATION</p>						ITEM	Date	Name	QTY	UNIT	△	10.07.2018	Segal	2	G	△	06.09.2019	Any	1	PCS	△			1	PCS	△			1	PCS	①			1	SET
ITEM	Date	Name	QTY	UNIT																																
△	10.07.2018	Segal	2	G																																
△	06.09.2019	Any	1	PCS																																
△			1	PCS																																
△			1	PCS																																
①			1	SET																																
G	<p>Customer-No.</p> <p>ASSMANN WSW-No. A-M12-04-FGMD-GTB2</p>																																			
H	<p>Drawing-No. ASS 8042 CO rev02</p> <p>Replace Sheet</p>																																			
<p>Scale Free</p> <p>TOLERANCE</p> <table border="1"> <thead> <tr> <th>Scale</th> <th>Free</th> </tr> </thead> <tbody> <tr> <td>.X</td> <td>±0.5</td> </tr> <tr> <td>.XX</td> <td>±0.20</td> </tr> <tr> <td>DIM</td> <td>TOL</td> </tr> <tr> <td>X.°</td> <td>±2.0°</td> </tr> <tr> <td>.X°</td> <td>±1.0°</td> </tr> <tr> <td>Angle</td> <td>TOL</td> </tr> </tbody> </table> <p>Remove "resistance many oils and chemical" from notes</p> <p>Update the notes</p> <p>Drawn</p> <p>Id.</p> <p>Modification</p> <p>Date</p> <p>Name</p> <p>Segal</p> <p>Segal</p> <p>ASSMANN components</p>							Scale	Free	.X	±0.5	.XX	±0.20	DIM	TOL	X.°	±2.0°	.X°	±1.0°	Angle	TOL																
Scale	Free																																			
.X	±0.5																																			
.XX	±0.20																																			
DIM	TOL																																			
X.°	±2.0°																																			
.X°	±1.0°																																			
Angle	TOL																																			

ROHS compliant

Unit: mm



ASS 8042 CO

rev02

SV4471