


Note for plug:

- Material:**
 Housing-Polycarbonate,clear.
 Terminal-0.36[.014] thick phosphor bronze.
 Thick gold in localized gold plate.
 Area,Gold flash over the remainder.
 Over 2.54mm[.000100] thick nickel underplate.
- ① Conductor: [26AWG(0.12x12) BARE COPPER]x4C.
 - ① Insulation: (PP6331 ID:0.95-1.0)x4C.
 - ① Jacket: PVC NOUL 80P.
 - ① Package: Individual PE Bag.

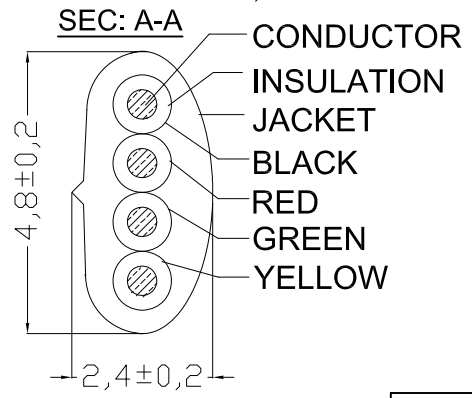

TERMINATION

P1		P2
1	Black	1
2	Red	2
3	Green	3
4	Yellow	4

Order code: AT-C-26-4/4/X-XX/R ①

Order color:
 B: Black
 W: White
 S: Silver

Length Code	Retracted Length(L3)	Extended Length(L2)	Cut Length(L1)
5	330±30	5.0FT-5.75FT	2300-2400
7	470±30	7.0FT-8.05FT	3000-3200
10	630±50	10.0FT-11.5FT	4300-4500
12	800±50	12.0FT-13.8FT	5200-5400
14	850±50	14.0FT-16.1FT	5800-6000
25	1900±50	25.0FT-28.75FT	10800-11000

RoHS compliant
 Unit: mm

Scale	Free					Date	Name	Customer-No.
TOLERANCE						Drawn	18.12.2017	Amy
.x	±0.50					Approved	08.05.2019	Amy
.xx	±0.20							
DIM	TOL	①	Update the notes, and add the cut length	08.05.2019	Segal			
		②	Drawn	18.12.2017	Amy			
Angle	±2°	Id.	Modification	Date	Name			

ASSMANN WSW-No.	
AT-C-26-4/4/X-XX/R	
Drawing-No.	
ASS 8161 CA	rev01
Replace	