

1 2 3 4 5 6 7

A

B

C

D

E

F

G

H

A

B

C


D

E

F

G

H

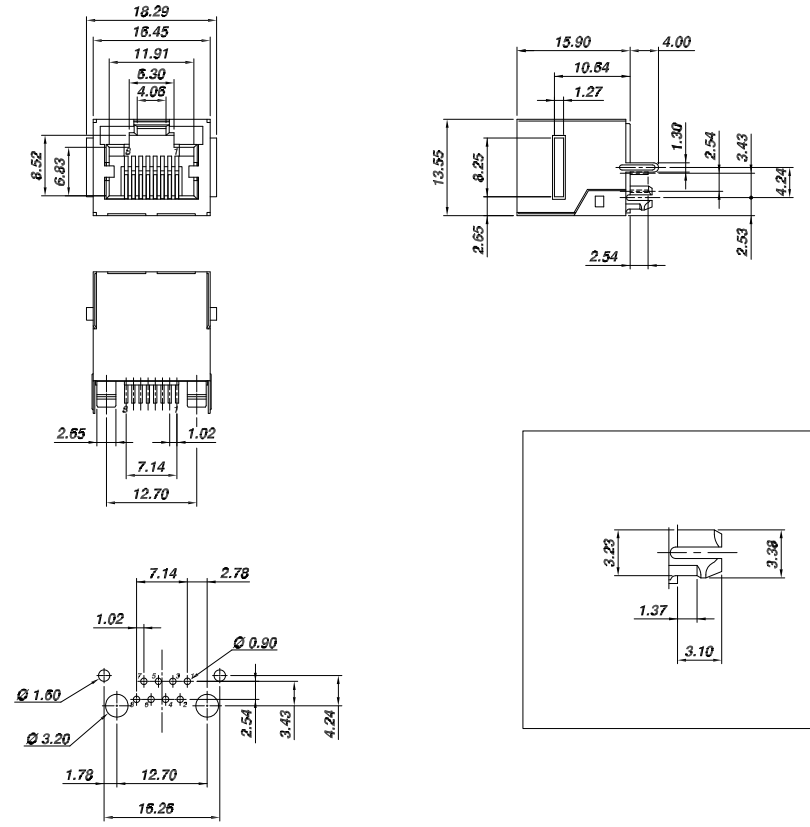

PCB LAYOUT
(TOP VIEW)

NOTES:

1. Electrical Characteristics

- 1). Insulation Resistance: 500MΩ Min, 500V DC for 1 minute;
- 2). Contact Resistance: 30mΩ MAX;
- 3). Current Rating: 1.5 AMP;
- 4). Voltage Rating: 150 VAC;
- 5). Dielectric Voltage: 1000Vrms At 1mA 60Sec. Min.

2. Physical Characteristics

- 1). Housing: For Wave Soldering Process, Nylon UL94V-0, Black Color, Soldering Temperature: 260°C for 5 Sec; 0.35mm Thickness Phosphor Bronze, Gold Plating 30u" Au Over Nickel;
- 2). Spring Wire: Brass Plating Nickel;
- 3). Shielded: -40°C~+85°C;
- 4). Temperature Range: 750 Mating Cycles Min.
- 5). Durability:

RoHS compliant
Unit: mm

| | | | | | | | | | |
|-----------|-------|-----|--------------|--|------------|----------|------------|-------|---|
| Scale | Free | | | | | | Date | Name | Customer-No. |
| TOLERANCE | | | | | | Drawn | 30.10.2019 | Segal | ASSMANN WSW-No. A-MJH-8-EG-HTT-S1 |
| .xx | ±0.25 | | | | | Approved | 30.10.2019 | Segal | |
| .xxx | ±0.13 | | | | | | | | |
| .xxxx | ±0.05 | | | | | | | | |
| DIM | TOL | | | | | | | | Drawing-No. |
| | | | | | | | | | ASS 8501 CO |
| | | Ⓢ | Drawn | | 30.10.2019 | Segal | | | rev00 |
| Angle | ±0.5° | Id. | Modification | | Date | Name | | | Sheet |



1 2 3 4 5 6 7