

1

2

3

4

5

6

7

A


A

B

B

C

C

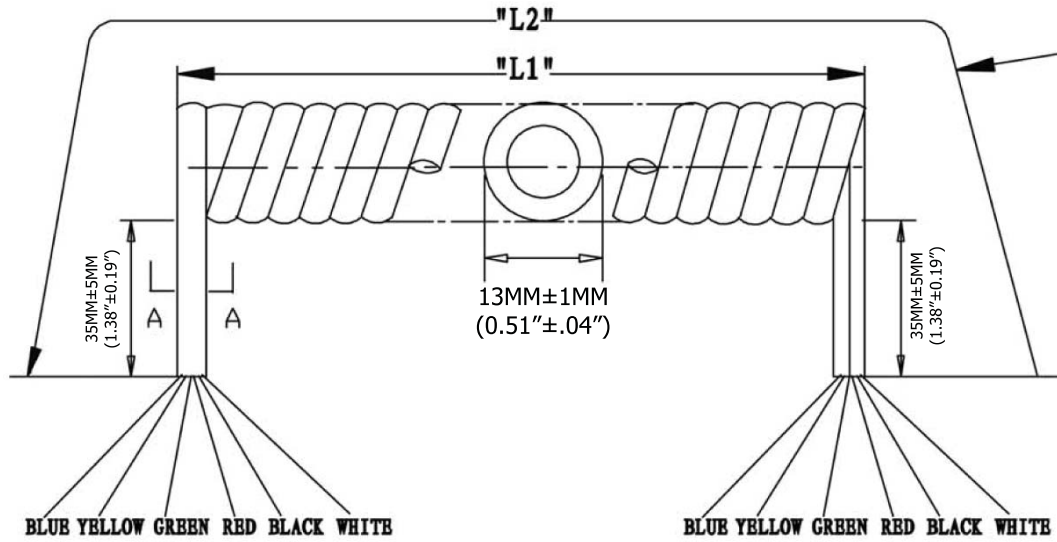


Extended length is with 500g of force

BLUE YELLOW GREEN RED BLACK WHITE

BLUE YELLOW GREEN RED BLACK WHITE

D

D

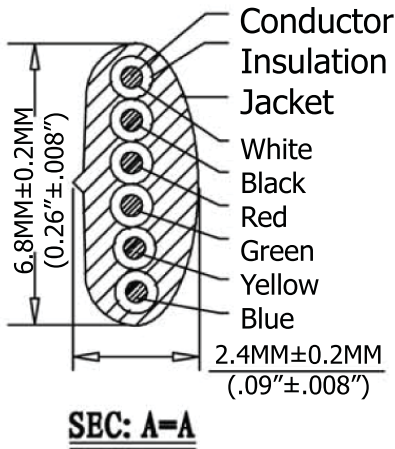

Extended Length ("L2")	Typical Retracted Length ("L1")
84.0 Inches - 96.6 Inches	29.5 Inches
2,133.6MM-2,453.64MM	749.3MM

E

E

**Material:**

- Conductor(X6C): 26AWG (0.12X12) Bare Copper
- Insulation(X6C):PP6331 ID 0.95-1.0
- Jacket: PVC NO UL 80P
- Package: Individual PE Bag

F

F

G

G

Scale	1:1						Name
TOLERANCE					Drawn	11.02.11	Chappell
X.X	±0.40				Approved		
X.XX	±0.25						
X.XXX	±0.15						
Angle	±3°						
		Modification	Date	Name			

Item No.  
**AT-K-C-26-6-W/7-R**

Title  
NON-UL 26AWG (0.16/7)\*6C, O.D.: 2.4\*6.8MM,  
Pre-Cut, 7Ft. White

Drawing No.

rev00

Replace Sheet

H

H



1

2

3

4

5

6

7