

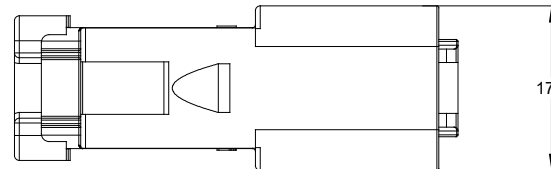

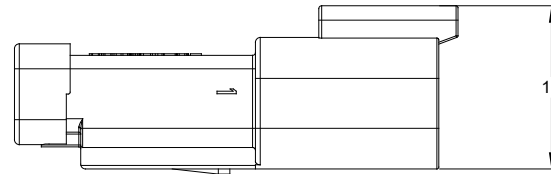



REVISIONS					
REV	ECO	DESCRIPTION	DATE	BY	APPR
A1	-	RELEASE NEW DRAWING	11MAY18	ROOKIE	TOMMY
A2	-	REVISED DESCRIPTION	12JUN19	JAH	DH

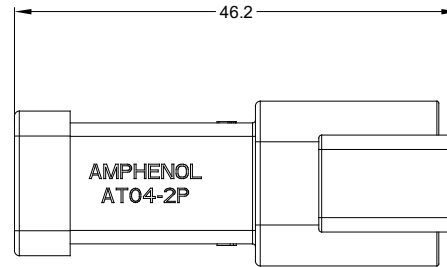

NOTES: UNLESS OTHERWISE SPECIFIED

- MATERIAL:  
HOUSING: THERMOPLASTIC, BLACK  
SEAL: SILICONE RUBBER  
CONTACT: COPPER ALLOY
- MODIFICATIONS: BLACK, 2 PIN BUSBAR WITH NICKEL PLATED
- SPECIFICATIONS:  
3.1 CURRENT RATING: 13 AMPS MAXIMUM FOR THE 2 PIN BUSBAR  
3.2 OPERATING TEMPERATURE: -55°C TO +125°C.  
3.3 DIELECTRIC WITHSTANDING VOLTAGE: LESS THAN 2 MILLIAMPS CURRENT LEAKAGE @ 1500 VOLTS AC.  
3.4 INSULATION RESISTANCE: 1000 MEGOHM MIN @ 25°C.  
3.5 MOISTURE RESISTANCE: IP67 ( MATED CONDITION ).  
3.6 MATING CYCLE DURABILITY: 100 CYCLES  
3.7 RoHS COMPLIANT
- MATING PART: AT06-2S\* PLUG  
(\* = AVAILABLE MODIFICATIONS )
- ALL DIMENSIONS ARE FOR REFERENCE USE ONLY.

AT04-2P-P060		REF: DT04-2P-P060		
PART NUMBER		DESCRIPTION		
QUANTITY	MATERIALS LIST			ITEM
UNLESS OTHERWISE SPECIFIED: 1) All dimensions are in metric (mm). 2) Tolerances are as follows: 1 PL DEC ±0.30 2 PL DEC ±0.15 3 PL DEC ±0.08 Fractions ±1/64 Angles ±1°		SIGNATURES	DATE	<b>SINE Systems Corporation</b>  A Subsidiary of Amphenol Corporation 44724 Morley Drive Clinton Township, MI 48036  <b>HYPERBUSS AT 2WAY RECEPTACLE  2 PIN BUSBAR NICKEL-PLATED, BLACK</b>
MATERIAL SPECIFICATIONS:		DRAWN: ROOKIE	11MAY18	
PROCESS SPECIFICATIONS:		CHECKED: ORION	11MAY18	
NEXT ASSY:		APPROVAL: TOMMY	11MAY18	
CUSTOMER:		THIS DRAWING IS SUPPLIED FOR INFORMATION ONLY. DESIGN FEATURES, SPECIFICATIONS AND PERFORMANCE DATA SHOWN HEREON ARE THE PROPERTY OF THE AMPHENOL CORPORATION. NO RIGHTS OF REPRODUCTION ARE IMPLIED. ALL DIMENSIONS ARE SUBJECT TO NORMAL MANUFACTURING VARIATIONS.		
SIZE: B		DWG NO: AT04-2P-P060		REVISION: A2
SCALE: NONE		SHEET 1 OF 1		

TITLE: HYPERBUSS AT 2WAY RECP 2 PIN BUSBAR NICKEL-PLATED, BLACK  
DWG NO: AT04-2P-P060  
REV: A2  
SH: 1  
OF: 1