

## NOTES: UNLESS OTHERWISE SPECIFIED

1. MATERIAL:

HOUSING: THERMOPLASTIC SEAL: SILICONE RUBBER


- 2. MODIFICATIONS: N/A
- 3. SPECIFICATIONS:
  - 3.1 CURRENT RATING: 13 AMPS
  - 3.2 OPERATING TEMPERATURE: -55°C TO +125°C
  - 3.3 DIELECTRIC WITHSTANDING VOLTAGE: LESS THAN 2 MILLIAMPS CURRENT LEAKAGE @ 1500 VOLTS AC.
  - 3.4 INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 25°C.
  - 3.5 MOISTURE RESISTANCE:

IP68(1M OF WATER FOR A PERIOD OF 24 HOURS, MATED CONDITION) IP69K(MATED CONDITION)

- 3.6 MATING CYCLE DURABILITY: 100 CYCLES
- 3.7 RoHS COMPLIANT
- 4. MATING PART: AT06-4S\* PLUG (\* = MODIFICATIONS AND COLORS)
- 5. ALL DIMENSIONS ARE FOR REFERENCE USE ONLY.

<u>6</u>	CONTACT	SIZE AND	REAF	R SEAL	WIF	RE RAN	GE:

CONTACT	MIN. INSUL		TYPICAL
SIZE	O.D.	O.D.	WIRE RANGE
16	2.24 mm	3.68 mm	14 - 20 AWG
10	(.088 in)	(.145 in)	(2.0-0.5mm <sup>2</sup> )

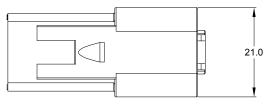


PART NUMBER CHART				
COLOR	PART NUMBER			
GREY	AT04-4P			
BLACK	AT04-4P-BLK			
BLUE	AT04-4P-BLU			
BROWN	AT04-4P-BRN			
GREEN	AT04-4P-GRN			
RED	AT04-4P-RED			
WHITE	AT04-4P-WHT			
YELLOW	AT04-4P-YEL			
ORANGE	AT04-4P-ORG			

		REVISIONS			
REV	ECO	DESCRIPTION	DATE	BY	APPR
A3	-	RELEASE NEW DWG FORMAT	26DEC13	JARRY	
A4	C0540S	UPDATE DIMENSIONS	22JUN16	JONY	TOMMY
A5	-	ADD COLOR OPTION	23NOV20	LOUIE	TOMMY

RECEPTACLE, 4 PIN, AT SERIES

AT04-4P-XXX

REV: **A5** SH:

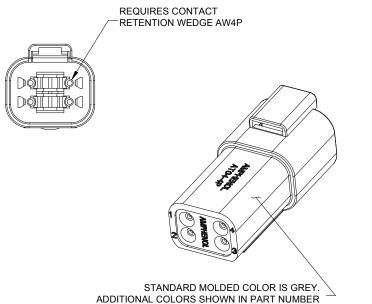

	SEE PART N	UMBER C	HART	REF: DT044P, DT044P-P004, DT044P-E004				
	PART N	NUMBER		DESCRIPTION			ITEM	
QUANTITY		MAT	ERI	ALS LI	ST			
	WISE SPECIFIED	SIGN	ATURES	DATE	Λ	mnhc	nal	
All dimensions a Tolerances are a PL DEC ±0.30	s follows:	DRAWN:	LOUIE	23NOV20	Amphenol			
2 PL DEC ±0.15 3 PL DEC ±0.08	Fractions ±1/64 Angles ±1°	CHECKED:	ORION	25NOV20	20 Sine Systems - www.amphenol-sine.com		_	
3) Note reference = X		ENGINEER:			44724 Morley Drive			
MATERIAL SPECIFICA	TIONS:	APPROVAL:	TOMMY	27NOV20		Clinton Township, MI 480	J36	
		CUSTOMER:		•	RI	ECEPTACLE, 4 PIN	AT SERIES	3
			S IS SUPPLIED F				., 0220	,
PROCESS SPECIFICATIONS:		SPECIFICATIO SHOWN HERE THE AMPHENO OF REPRODUC	NS AND PERFO ON ARE THE PR DL CORPORATIO CTION ARE IMPL ARE SUBJECT TO	RMANCE DATA ROPERTY OF ON. NO RIGHTS LIED. ALL	B C-	AT04-4F	-XXX	A5
NEXT ASS'Y:			ING VARIATION		SCALE: NONE		SHEET 1 OF	1

CHART ARE AVAILABLE VIA SPECIAL ORDER.

## A Series™ - Contact Size 16 Options (Works with: AT, ATV, AHD-9, ARC, DuraMate and PanelMate Series)

	Machined Contacts, Sockets & Pins			
Part Number	Description	Size	AWG	Туре
AT60-215-1631	Male Contact - Pin, Gold-plated	16	14	Machined
AT62-209-1631	Female Contact - Socket, Gold-plated	16	14	Machined
AT60-215-16141	Male Contact - Pin, Nickel-plated	16	14	Machined
AT62-209-16141	Female Contact - Socket, Nickel-plated	16	14	Machined
AT60-202-1631	Male Contact - Pin, Gold-plated	16	16-20	Machined
AT62-201-1631	Female Contact - Socket, Gold-plated	16	16-20	Machined
AT60-202-16141	Male Contact - Pin, Nickel-plated	16	16-20	Machined
AT62-201-16141	Female Contact - Socket, Nickel-plated	16	16-20	Machined
AT60-202-1631-22	Male Contact - Pin, Gold-plated	16	22-24	Machined
AT62-201-1631-22	Female Contact - Socket, Gold-plated	16	22-24	Machined
AT60-202-16141-22	Male Contact - Pin, Nickel-plated	16	22-24	Machined
AT62-201-16141-22	Female Contact - Socket, Nickel-plated	16	22-24	Machined

Tooling - Machined Contacts			
Part Number	Description		
AUTK-20	Hand Crimp Tool, Size 20		
AUTK-100	Universal Heavy Duty Contact Crimping Tool Kit, Size 12/16/20		
CA-5D12	Universal Hand Crimp Tool, Size 12/16/20		
CA-5E12	Pneumatic Crimp Tool, Size 12/16/20		

	Contact Removal Tools (For both Machined or Stamped & Formed Contacts)			
Part Number	Description			
ATRT-100	Contact and Wedgelock Extraction Tool			
AT11-310-1605	Contact Removal Tool, Plastic, Size 16			

	Sealing Plugs (For both Machined or Stamped & Formed Contacts)			
Part Number	Description			
A114017	Sealing Plug, Size 16, White			
A114017-SR	Sealing Plug, Size 16, SR01 Series, Black			
AT13-217-1605	Locking Sealing Plug, Size 16, Grey			
AT13-217-1605-SR	Locking Sealing Plug, Size 16, SR01 Series, Red			

Stamped & Formed Contacts, Sockets & Pins				
Part Number	Description	Size	AWG	Туре
AT60-14-0144	Male Contact - Pin, Gold-plated	16	14-16	Stamped & Formed
AT62-14-0144	Female Contact - Socket, Gold-plated	16	14-16	Stamped & Formed
AT60-14-0122	Male Contact - Pin, Nickel-plated	16	14-16	Stamped & Formed
AT62-14-0122	Female Contact - Socket, Nickel-plated	16	14-16	Stamped & Formed
AT60-16-0144	Male Contact - Pin, Gold-plated	16	16-18	Stamped & Formed
AT62-16-0144	Female Contact - Socket, Gold-plated	16	16-18	Stamped & Formed
AT60-16-0122	Male Contact - Pin, Nickel-plated	16	16-18	Stamped & Formed
AT62-16-0122	Female Contact - Socket, Nickel-plated	16	16-18	Stamped & Formed
AT60-16-0644	Male Contact - Pin, Gold-plated	16	18-20	Stamped & Formed
AT62-16-0644	Female Contact - Socket, Gold-plated	16	18-20	Stamped & Formed
AT60-16-0622	Male Contact - Pin, Nickel-plated	16	18-20	Stamped & Formed
AT62-16-0622	Female Contact - Socket, Nickel-plated	16	18-20	Stamped & Formed
AT60-16-0844	Male Contact - Pin, Gold-plated	16	20-22	Stamped & Formed
AT62-16-0844	Female Contact - Socket, Gold-plated	16	20-22	Stamped & Formed
AT60-16-0822	Male Contact - Pin, Nickel-plated	16	20-22	Stamped & Formed
AT62-16-0822	Female Contact - Socket, Nickel-plated	16	20-22	Stamped & Formed

	Tooling - Stamped & Formed Contacts		
MFX-3950	Crimp Die - Size 16, 18-20AWG		
MFX-3953	Crimp Die - Size 16, 16-18AWG		
MFX-3975	Crimp Die - Size 16, 14-16AWG		
MFX-3990	Crimp Die - Size 16, 20-22AWG		
ATT-16-00	Hand Crimp Tool - Size 16, 14-16AWG		
ATT-16-01	Hand Crimp Tool - Size 16, 18-20AWG		
ATT-1612-03	Hand Crimp Tool - Size 16, 20-22AWG		