



BC847CS / BC857CS

GENERAL PURPOSE TRANSISTORS

VOLTAGE 45 Volts **POWER** 150 mW

SOT-363


Unit : inch(mm)

FEATURES

- General Purpose Amplifier Applications
- Collector Current IC = -100mA
- Lead free in compliance with EU RoHS 2011/65/EU directive
- Green molding compound as per IEC61249 Std. . (Halogen Free)

MECHANICAL DATA

Case : SOT-363
 Terminals : Solderable per MIL-STD-750,Method 2026
 Approx Weight : 0.00021 ounce, 0.006 gram
 Marking : BC847CS=47C
 BC857CS=57C

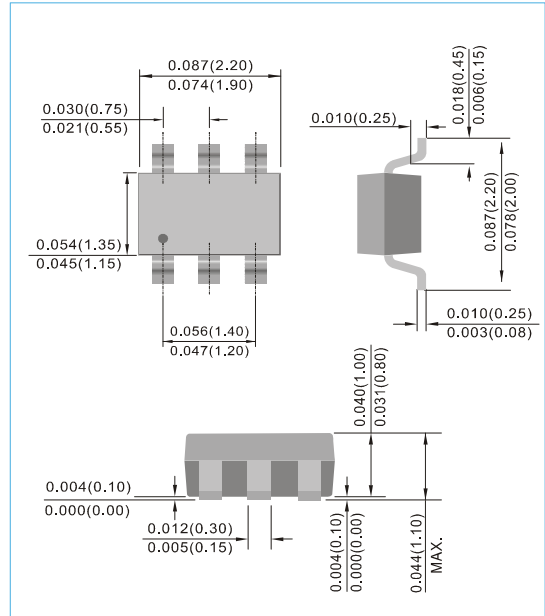

ABSOLUTE MAXIMUM RATINGS

| PARAMETER | SYMBOL | BC847CS | BC857CS | UNITS |
|--|----------------|-------------|---------|-------|
| Collector-Emitter Voltage | V_{CEO} | 45 | | V |
| Collector-Base Voltage | V_{CBO} | 50 | | V |
| Emitter-Base Voltage | V_{EBO} | 5 | | V |
| Collector Current-Continuous | I_C | 100 | | mA |
| Max Power Dissipation (Note 1) | P_{TOT} | 225 | | mW |
| Operating Junction and Storage Temperature Range | T_J, T_{STG} | -55 to +150 | | °C |
| Circuit Figure | | Fig.54 | Fig.53 | |




Fig.54




Fig.53



BC847CS / BC857CS

THERMAL CHARACTERISTICS

| PARAMETER | SYMBOL | VALUE | UNITS |
|---|-----------------|-------|---------------|
| Thermal Resistance, Junction to Ambient | $R_{\theta JA}$ | 556 | $^{\circ}C/W$ |

Note 1 : Transistor mounted on FR-4 board 70 x 60 x 1mm

ELECTRICAL CHARACTERISTICS ($T_J=25^{\circ}C$, unless otherwise noted)

| PARAMETER | SYMBOL | MIN. | TYP. | MAX. | UNIT |
|--|---------------|----------|------------|--------------|---------------|
| Collector-Emitter Breakdown Voltage ($I_C=10mA, I_B=0$) | $V_{(BR)CEO}$ | 45 | - | - | V |
| Collector-Base Breakdown Voltage ($I_C=10\mu A, I_B=0$) | $V_{(BR)CBO}$ | 50 | - | - | V |
| Emitter-Base Breakdown Voltage ($I_E=1\mu A, I_C=0$) | $V_{(BR)EBO}$ | 5.0 | - | - | V |
| Emitter-Base Cutoff Current ($V_{EB}=5V$) | I_{EBO} | - | - | 100 | nA |
| Collector-Base Cutoff Current ($V_{CE}=30V, I_E=0$) $T_J=150^{\circ}C$ | I_{CBO} | - | - | 15 4.0 | nA μA |
| DC Current Gain ($I_C=10\mu A, V_{CE}=5V$) ($I_C=2.0mA, V_{CE}=5V$) | h_{FE} | - 420 | 270 520 | - 800 | - |
| Collector-Emitter Saturation Voltage ($I_C=10mA, I_B=0.5mA$) ($I_C=100mA, I_B=5.0mA$) | $V_{CE(SAT)}$ | - - | - - | 0.3 0.65 | V |
| Base-Emitter Saturation Voltage ($I_C=10mA, I_B=0.5mA$) ($I_C=100mA, I_B=5.0mA$) | $V_{BE(SAT)}$ | - - | 0.7 0.9 | - - | V |
| Base-Emitter On Voltage ($I_C=2.0mA, V_{CE}=5.0V$) ($I_C=10mA, V_{CE}=5.0V$) | $V_{BE(ON)}$ | 0.6 - | - - | 0.75 0.82 | V |
| Collector-Base Capacitance ($V_{CB}=10V, I_E=0, f=1MHz$) | C_{CB} | - | - | 4.5 | pF |
| Current-Gain-Bandwidth Product ($I_C=10mA, V_{CE}=5.0V, f=100MHz$) | F_T | - | 200 | - | MHz |



BC847CS / BC857CS

ELECTRICAL CHARACTERISTICS CURVES

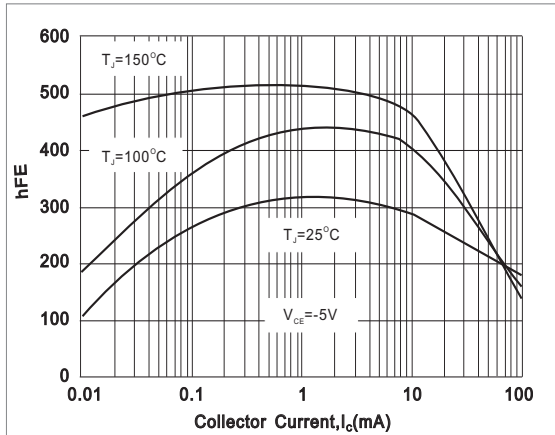


Fig.1- TYPICAL h_{FE} vs. Collector Current

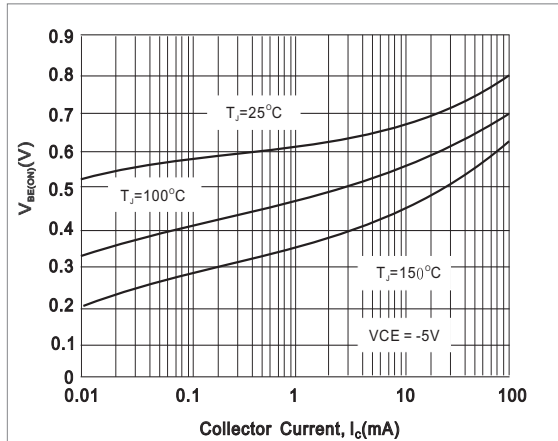


Fig.2- TYPICAL $V_{BE(ON)}$ vs. Collector Current

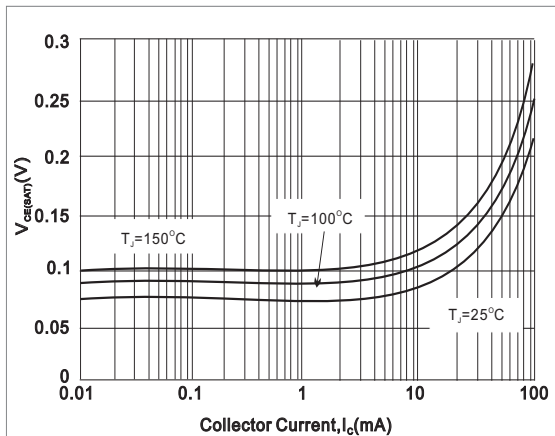


Fig.3- TYPICAL $V_{CE(SAT)}$ vs. Collector Current

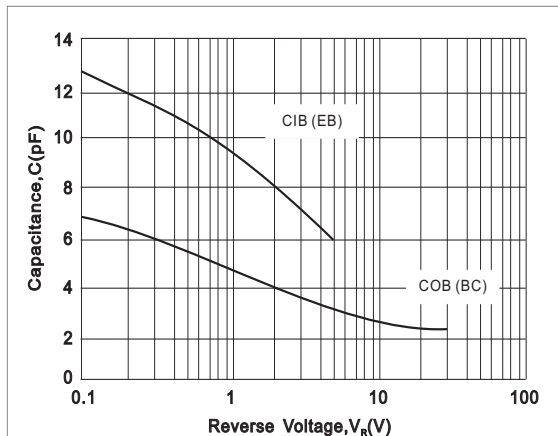


Fig.4- TYPICAL CAPACITANCES vs. REVERSE VOLTAGE




BC847CS / BC857CS

MOUNTING PAD LAYOUT

SOT-363

Unit : inch(mm)

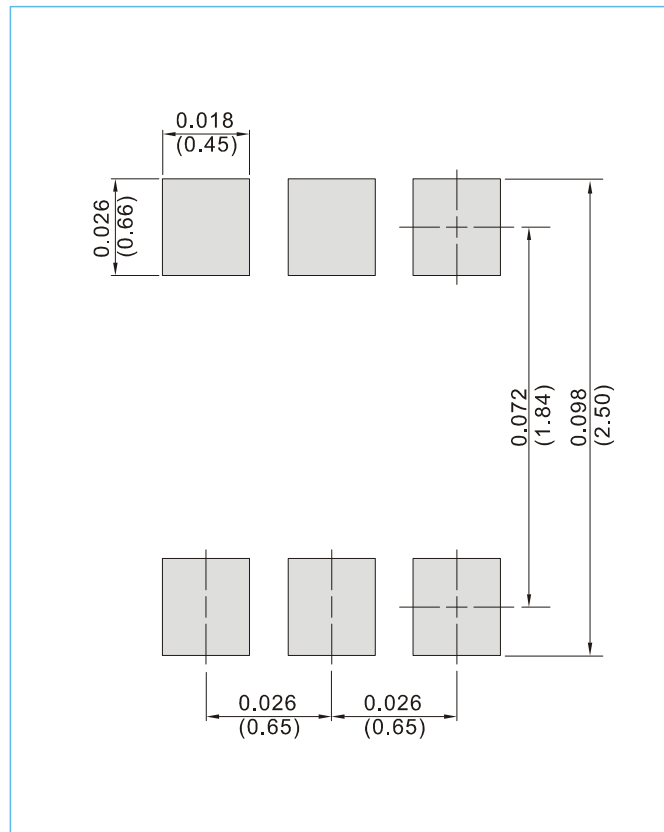

ORDER INFORMATION

- Packing information
 - T/R - 10K per 13" plastic Reel
 - T/R - 3K per 7" plastic Reel



BC847CS / BC857CS

Part No_packing code_Version

BC847CS_R1_00001

BC847CS_R2_00001

For example :

RB500V-40_R2_00001



| Packing Code XX | | | | Version Code XXXXX | | |
|--------------------------------------|----------------------|----------------------------------|----------------------|---------------------------|----------------------|---------------------------------------|
| Packing type | 1 st Code | Packing size code | 2 nd Code | HF or RoHS | 1 st Code | 2 nd ~5 th Code |
| Tape and Ammunition Box (T/B) | A | N/A | 0 | HF | 0 | serial number |
| Tape and Reel (T/R) | R | 7" | 1 | RoHS | 1 | serial number |
| Bulk Packing (B/P) | B | 13" | 2 | | | |
| Tube Packing (T/P) | T | 26mm | X | | | |
| Tape and Reel (Right Oriented) (TRR) | S | 52mm | Y | | | |
| Tape and Reel (Left Oriented) (TRL) | L | PANASERT T/B CATHODE UP (PBCU) | U | | | |
| FORMING | F | PANASERT T/B CATHODE DOWN (PBCD) | D | | | |



BC847CS / BC857CS

Disclaimer

- Reproducing and modifying information of the document is prohibited without permission from Panjit International Inc..
- Panjit International Inc. reserves the rights to make changes of the content herein the document anytime without notification. Please refer to our website for the latest document.
- Panjit International Inc. disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially occurred.
- Panjit International Inc. does not assume any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.
- Applications shown on the herein document are examples of standard use and operation. Customers are responsible in comprehending the suitable use in particular applications. Panjit International Inc. makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.
- The products shown herein are not designed and authorized for equipments requiring high level of reliability or relating to human life and for any applications concerning life-saving or life-sustaining, such as medical instruments, transportation equipment, aerospace machinery et cetera. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Panjit International Inc. for any damages resulting from such improper use or sale.
- Since Panjit uses lot number as the tracking base, please provide the lot number for tracking when complaining.