

SUMMARY

Wires



Image is for illustrative purpose only

| | |
|------------------|-----------------------------|
| Series | 0B |
| Termination type | No contacts / Accessory |
| IP rating | 61 mated (mating interface) |
| AWG wire size | 0.00 - 0.00 |
| Cable Ø | 0.00 - 0.00 mm |
| Status | Active |

Download

[Request a quote](#)

[Catalog](#)

TECHNICAL DETAILS

Mechanics

| | |
|-------------------|---|
| Shell Style/Model | BFG*: Cap for plug |
| Keying | 1 key (alpha=0, plug: male contacts, receptacle: female contacts) |
| Housing Material | POM (Polyoxymethylene) shell without treatment, silicone gasket |
| Weight | .72 g |

Performance

| |
|---------------|
| Configuration |
| Insulator |
| Rated Current |

Specifications

Contact LEMO for performance details.


Others

| |
|--|
| Endurance (Shell): 5000 |
| Temp (min / max): -55°C / +100°C |
| Humidity (max): ≤95% [at 60 deg C / 140 F] |
| Vibration: 15 g [10 Hz - 2000 Hz] |
| Shock Resistance: 100 g [6 ms] |

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

Climatical Category: 50/175/21
Shielding (min): 75 dB (10 MHz)
Shielding (min): 40 dB (1 GHz)

DRAWINGS

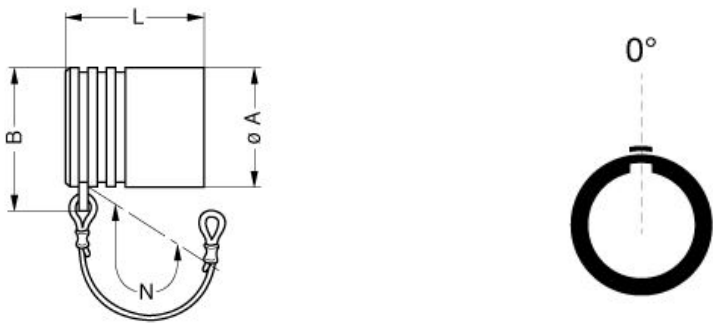

Dimensions

| | A | B | L | N |
|-----|------|-------|------|------|
| mm. | 9.5 | 12.45 | 11.2 | 85 |
| in. | 0,37 | 0,49 | 0,44 | 3,35 |

RECOMMENDED BY LEMO

Tools

LEMO products and services are provided “as is”. LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.