



Date	SYM	REVISION RECORD	AUTH	DR.	CK.
6/14/13	C	UPDATED TITLE	T.B.	B.S.	
06/30/17	D	DIM. 151.42 WAS 149.20 DIM. 57.48 WAS 56.60	T.B.	B.S.	
12/28/20	E	Dim. 151.00 was 151.42	T.B.	B.S.	

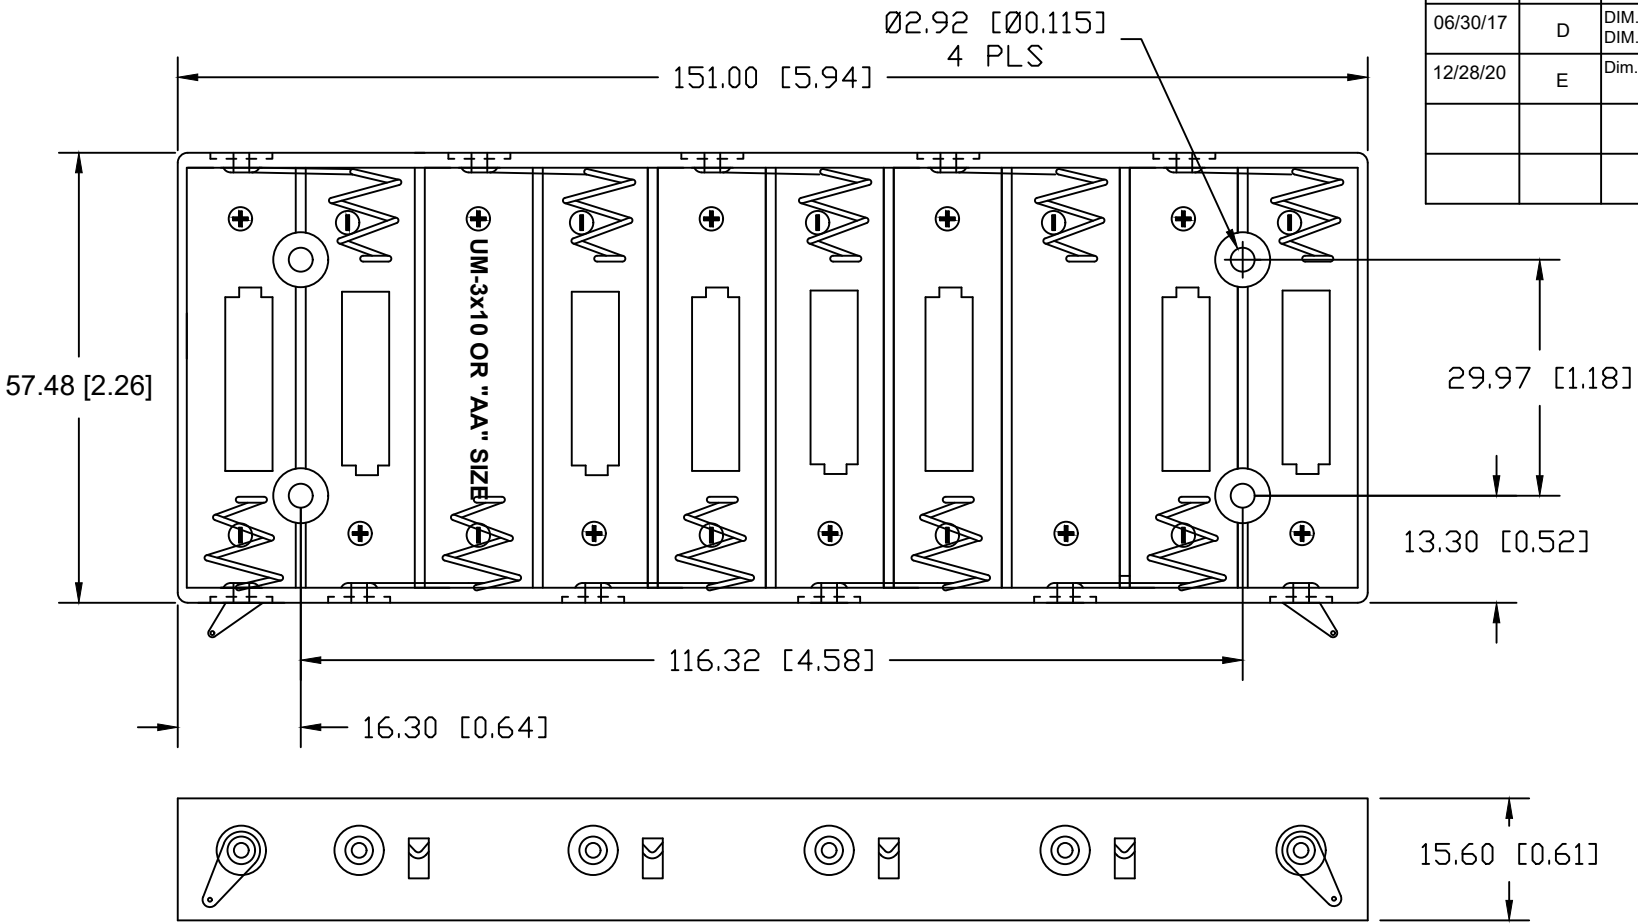

**MATERIAL:**  
 HOUSING: POLYPROPYLENE, BLACK  
 FLAMMABILITY RATING -UL94 HB, UL FILE NO. E216959  
 TEMPERATURE RANGE: -10°C to +100°C  
 SPRINGS: SPRING STEEL, NICKEL PLATED  
 RIVETS: BRASS, NICKEL PLATED  
 LUGS: BRASS, NICKEL PLATED  
 CONTACT RESISTANCE: UNDER 50mΩ FOR +/- CONTACTS  
 PER EIA-540J000  
 ROHS COMPLIANT

**MOUNTING INSTRUCTION:**  
 USE 2-56 MACHINE SCREWS OR EYELETS 0.089" OD  
 BY 0.15" FLANGE STIMPSON GS-3 SERIES OR EQUIVALENT.  
 ALSO ADHESIVES AND DOUBLE SIDED TAPES WORK WELL.

Tolerance (Inches)	 <b>Memory Protection Devices, Inc</b> 200 Broad Hollow Road, Farmingdale, New York 11735		
Decimal ±.5 (.020)	Scale	Drawn By B.S.	
Fractional ± .8 (.030)	Title TEN "AA" CELL HOLDER WITH SOLDER LUGS		
Angular ± 3°	Date 12/28/20	Drawing Number BH10AAL	
		Approved By T.B.	