
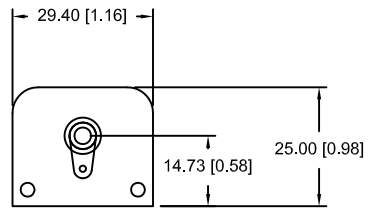



Date	SYM	REVISION RECORD	AUTH	DR.	CK.
6/28/13	A	RE-DRAWN IN AUTOCAD UPDATED TO ROHS 2 COMPLIANT	T.B.	B.S.	
6/02/17	B	ADDED MORE DIM.	T.B.	B.S.	
7/07/17	C	ADDED DIM. 5.20	T.B.	B.S.	
7/17/17	D	UPDATED MOUNTING INSTRUCTION	T.B.	B.S.	

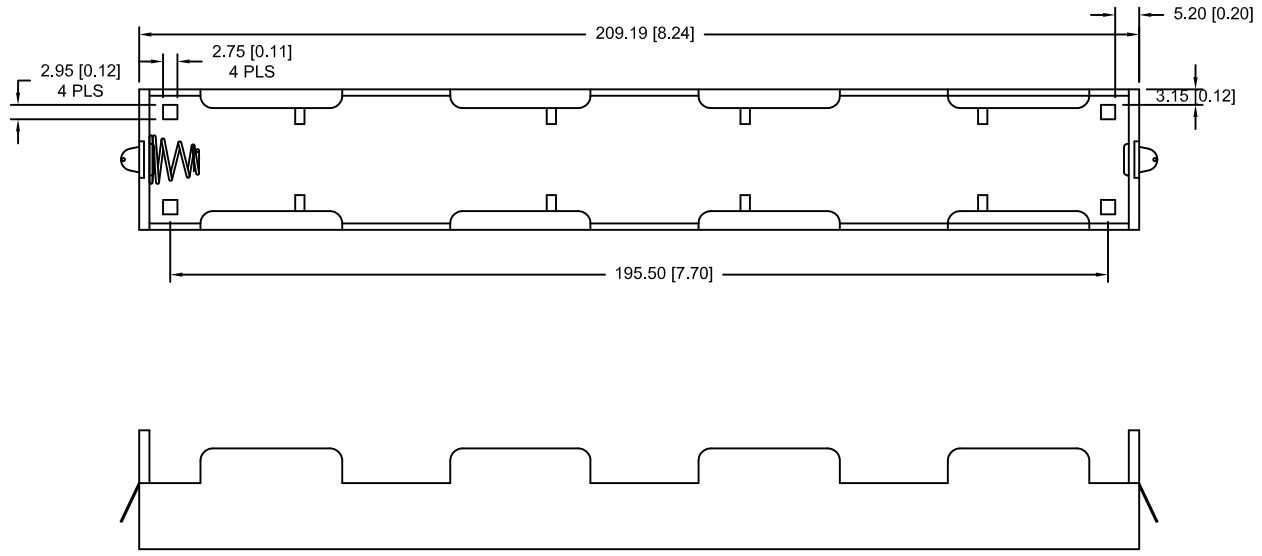

## SPECIFICATIONS

Plastic material - Polypropylene  
 Flammability Rating -UL94-HB, UL File NO. E216959  
 Temperature Range: -10°C to +100°C  
 Springs - Nickel Plated Spring Steel  
 Rivets - Brass, Nickel Plated  
 Lugs: Brass, Nickel Plated  
 CONTACT RESISTANCE: UNDER 50mΩ FOR +/- CONTACTS PER EIA-540J000  
 ROHS 2 COMPLIANT

Mounting Instruction:  
 Use 4-40 machine screws.  
 also adhesives and double sided tapes work well.

Tolerance (Except as noted)	 <b>Memory Protection Devices, Inc</b> 200 Broad Hollow Road, Farmingdale, New York 11735	Scale	Drawn By T.S.
		XX	Approved By T.B.
decimal ±.5 (.020)	Title FOUR "C" CELL HOLDER WITH SOLDER LUGS		
Fractional ± .8 (.030)	Date 07/17/17	Drawing Number BH14CL	