

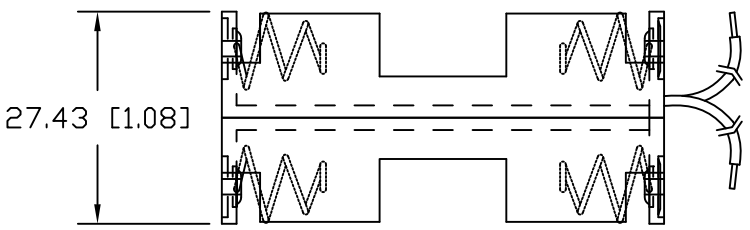



Date	SYM	REVISION RECORD	AUTH	DR.	CK.
10/31/14	E	REDRAWN AND UPDATED TO ROHS 2 COMPLIANT	T.B.	B.S.	
07/17/15	F	UPDATED TITLE	T.B.	B.S.	
05/12/17	G	DIM. 150.0 WAS 152.4 DIM. 5.0 WAS 3.18 DIM. 57.0 WAS 57.15	T.B.	B.S.	

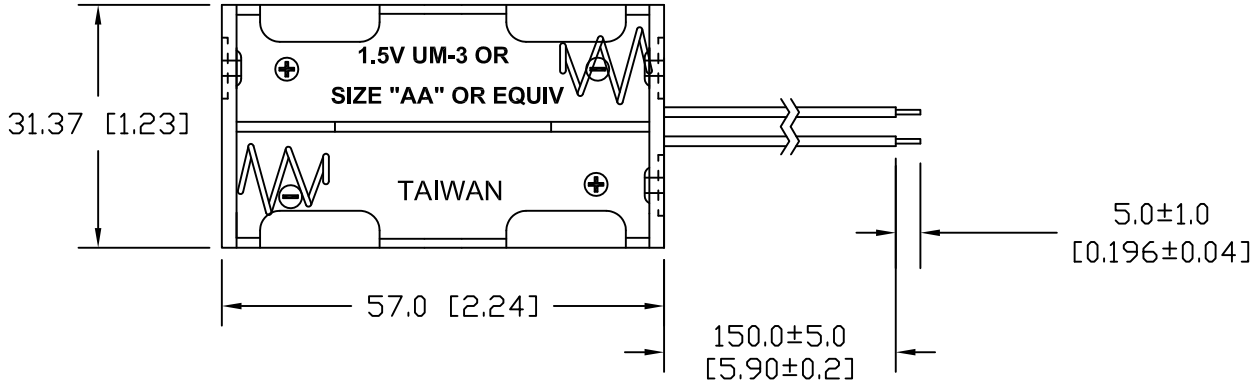

MATERIAL:
 HOUSING: POLYPROPYLENE
 FLAMMABILITY RATING -UL94 HB, UL FILE NO. E216959
 TEMPERATURE RANGE: -10°C to +100°C
 SPRINGS: SPRING STEEL, NICKEL PLATED
 RIVETS: BRASS, NICKEL PLATED
 WIRES: 26AWG, UL1007, CSA-TR-64, 300V, 80°C
 CONTACT RESISTANCE: UNDER 50mΩ FOR +/- CONTACTS PER EIA-540J000
 ROHS 2 COMPLIANT

Tolerance (Inches)	 Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735		
Decimal ±.5 (.020)		Scale	Drawn By B.S.
Fractional ±.8 (.030)	Title 4 "AA" BATTERY HOLDER WITH WIRE LEADS		
Angular ± 3°	Date 05/12/17	Drawing Number BH24AAW	
		Approved By T.B.	