
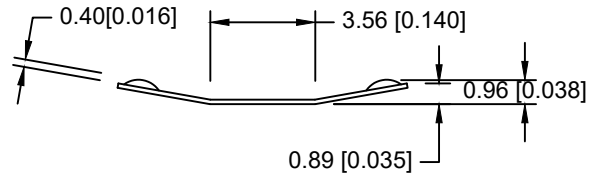



| Date | SYM | REVISION RECORD | AUTH | DR. | CK. |
|----------|-----|-----------------------------------|------|-----|-----|
| 03/15/23 | A | REDRAWN | DL | BS | |
| 03/31/23 | B | Updated Packaging Quantity | DL | BS | |
| 09/14/23 | C | Updated notes Changed material | DL | BS | |
| | | | | | |
| | | | | | |

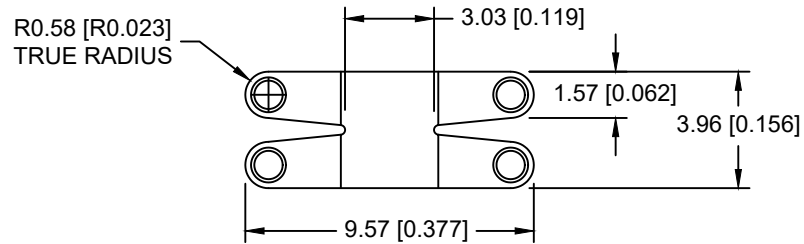

NOTES:

1. MATERIAL:

0.006" PHOS. BRONZE, NICKEL PLATED 120u,
 GOLD PLATED 1u~3u
 MINIMUM CELL DIAMETER: 0.430IN (11mm)
 RECOMMENDED PAD SIZE: 0.140IN X 0.166IN (3.6mm X 4.2mm)
 ROHS COMPLIANT

| | | | |
|--------------------------------|---|--------------------------|-----------------------------------|
| Tolerance (Except as noted) |  Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735 | | |
| | decimal ±.5 (.020) | Scale | Drawn By B.S. Approved By T.B. |
| Fractional ± .8 (.030) | Title NEGATIVE BATTERY CONTACT FOR 20mm DIA. | | |
| Angular ± 3° | Date 09/14/23 | Drawing Number BK-112 | |