



Bullet Connectors

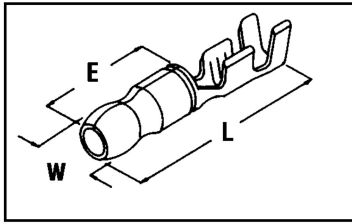


Female Receptacle

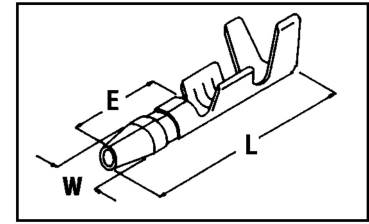

Male Bullet

HOFFMAN PART NO.	QTY	DESCRIPTION	WIRE SIZE	DIMENSIONS (INCHES)			
				L	E	W	UL
GM2014T183ST	7500	Male Bullet .183 Diameter Strip	20-14	0.874	0.465	0.179	Y
GF2014T183ST	5000	Female Bullet .183 Diameter Strip	20-14	0.623	0.315	0.138	Y
GM2216T140ST	10000	Male Bullet .140 Diameter Strip	22-16	0.874	0.465	0.179	Y
GF2216T140ST	10000	Female Bullet .140 Diameter Strip	22-16	0.689	0.248	0.138	Y
GM2216T158ST	10000	Male Bullet .158 Diameter Strip	22-16	0.689	0.359	0.156	Y
GF2216T158ST	10000	Female Bullet .158 Diameter Strip	22-16	0.689	0.248	0.156	Y

Piggyback Connectors



HOFFMAN PART NO.	QTY	DESCRIPTION	WIRE SIZE	TAB	DIMENSIONS (INCHES)				
					L	E	W	W1	UL
DFM2014T250MS	2000	Male Female 250 X 032 Tab	20-14	250 X 032	0.768	0.315	0.303	0.246	Y
DFM2218T187A5MS	5000	Male Female 110 X 020 Tab	22-18	110 X 020	0.622	0.236	0.224	0.187	N

Available for Lease Only
SCT25 Semi Automatic
Electric Metal Strip
Crimping Machine

(page 109 Tool Section)

