## CUSTOMER PRODUCT SPECIFICATION SHEET

RoHS Complian:

## CAB528RF: I-PEX MHF + SMA STRAIGHT BUI KHFAD JACK WITH O-RING RATED TO IP67/68 + \$\phi1.37MM | OW | OSS CABLE 8GHz

### SPECIFICATIONS :

- 1. I-PEX MHF | PLUG. P/N: 20351-112R-37.
- 2. \phi1.37MM LOW LOSS COAXIAL CABLE. COLOR: BLACK.
- 3. SMA STRAIGHT BULKHEAD JACK WITH O-RING RATED TO IP67/68, P/N: RFCT-SMA108-F37.

#### ENVIRONMENTAL:


- A. BULKHEAD MOUNTED CONNECTOR (RFCT-SMA108-F37) RATED TO THE FOLLOWING SPECIFICATION:
  - i. IP6X DUST TIGHT NO PARTICLE INGRESS.
- ii. IPX7 WATERPROOF FOR 30 MINUTES UP TO 1 METER UNDFRWATER
- iii. IPX8 WATERPROOF FOR 48 HOURS AT 1 METER UNDERWATER.


#### NOTES:

- 1. WORKING FREQUENCY RANGE: DC-8GHz.
- 2. OPERATING TEMPERATURE: -40°C TO +85°C.
- 3. IMPEDANCE: 50 Ohm.

# USAGE PRECAUTIONS: CABLES USING 'MICRO' COAX ARE DELICATE:

- (i) HANDLE WITH CARE.
- (ii) DO NOT TWIST: APPLY EXCESSIVE FORCES OR SHARP BENDS TO THE CABLE. DO NOT FORCEFULLY DEFORM WIRES.
- (iii) CONSULT CONNECTOR MANUFACTURER'S DATASHEETS FOR DETAILED NOTES ON HANDLING INSTRUCTIONS

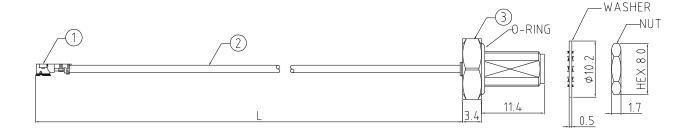

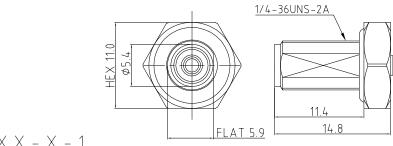

SMA JACK DETAIL DRAWING

(C) THIS DRAWING IS CONFIDENTIAL AND MUST NOT BE COPIED OR DISCLOSED WITHOUT WRITTEN CONSENT

HOW TO ORDER (AB528RF - X X X X - X X - X - 1

"L" LENGTH IN MM eq: 100MM = 0100(MIN. 0050-MAX.0400 STANDARD = 0100, 0150, 0200) Tolerance: 50-200mm: ±5mm. 201-400mm: +7mm.

WASHER AND NUT OPTIONS: BLANK = SEPERATELY PACKED (STANDARD) A = ASSEMBLED WITH CONNECTOR

ORIENTATION OPTIONS:

BLANK = DOES NOT HAVE A FIXED ORIENTATION


F1 = MHF CONNECTION DOWN (L=50-200MM)

F2 = MHF CONNECTION UP (L=50-200MM)

F3 = MHF CONNECTION AND D FLAT SAME ORIENTATION (L=50-200MM)

F4 = MHF CONNECTION AND D FLAT OPPOSITE ORIENTATION (L=50-200MM)

(SEE NOTES 1 2 3 AND DIAGRAMS FOR MORE INFORMATION)



RECOMMENDED SMA MOUNTING HOLE

EN Flat	Flat
'F1' ORIENTATION	<u>'F3' ORIENTATION</u>
'F2' ORIENTATION	CFLat 'F4' ORIENTATION

Tolerances: N/A N/A N/A THIRD ANGLE Unstated NTS Scale: .X .XX .XXX ANGLES Drawn: NYW Title CABLE ASSEMBLY App'd: XXX Revision: 1.1 Date: 22 MAY '23 Unit: mm





Drawing Number: CAB528RF

Sheet 1 of 1 Drawing (C) E and 0 E

