

CUSTOMER PRINT


PART NUMBER: CARA6C806PPXXX90

NOTES:

1. FINISHED PRODUCT TO BE COILED
2. OVERMOLD BOOT MATERIAL: UV PBT, BLACK
3. ELECTRICAL TEST: 100% CONTINUITY
4. ALL DIMENSIONS ARE REFERENCE EXCEPT THOSE WITH A TOLERANCE

ASS'Y P/N	"X" DIM
CARA6C806PP03990	3 FT. 3 1/2 IN. ±2 IN. [1M ±50.8mm]
CARA6C806PP07990	6 FT. 7 IN. ±2 IN. [2M ±50.8mm]
CARA6C806PP19790	16 FT. 5 IN. ±4 IN. [5M ±101.6mm]
CARA6C806PP39490	32 FT. 9 3/4 IN. ±8 IN. [10M ±203.2mm]
CARA6C806PPXXX90	

CABLE CUT LENGTH IN "INCHES"

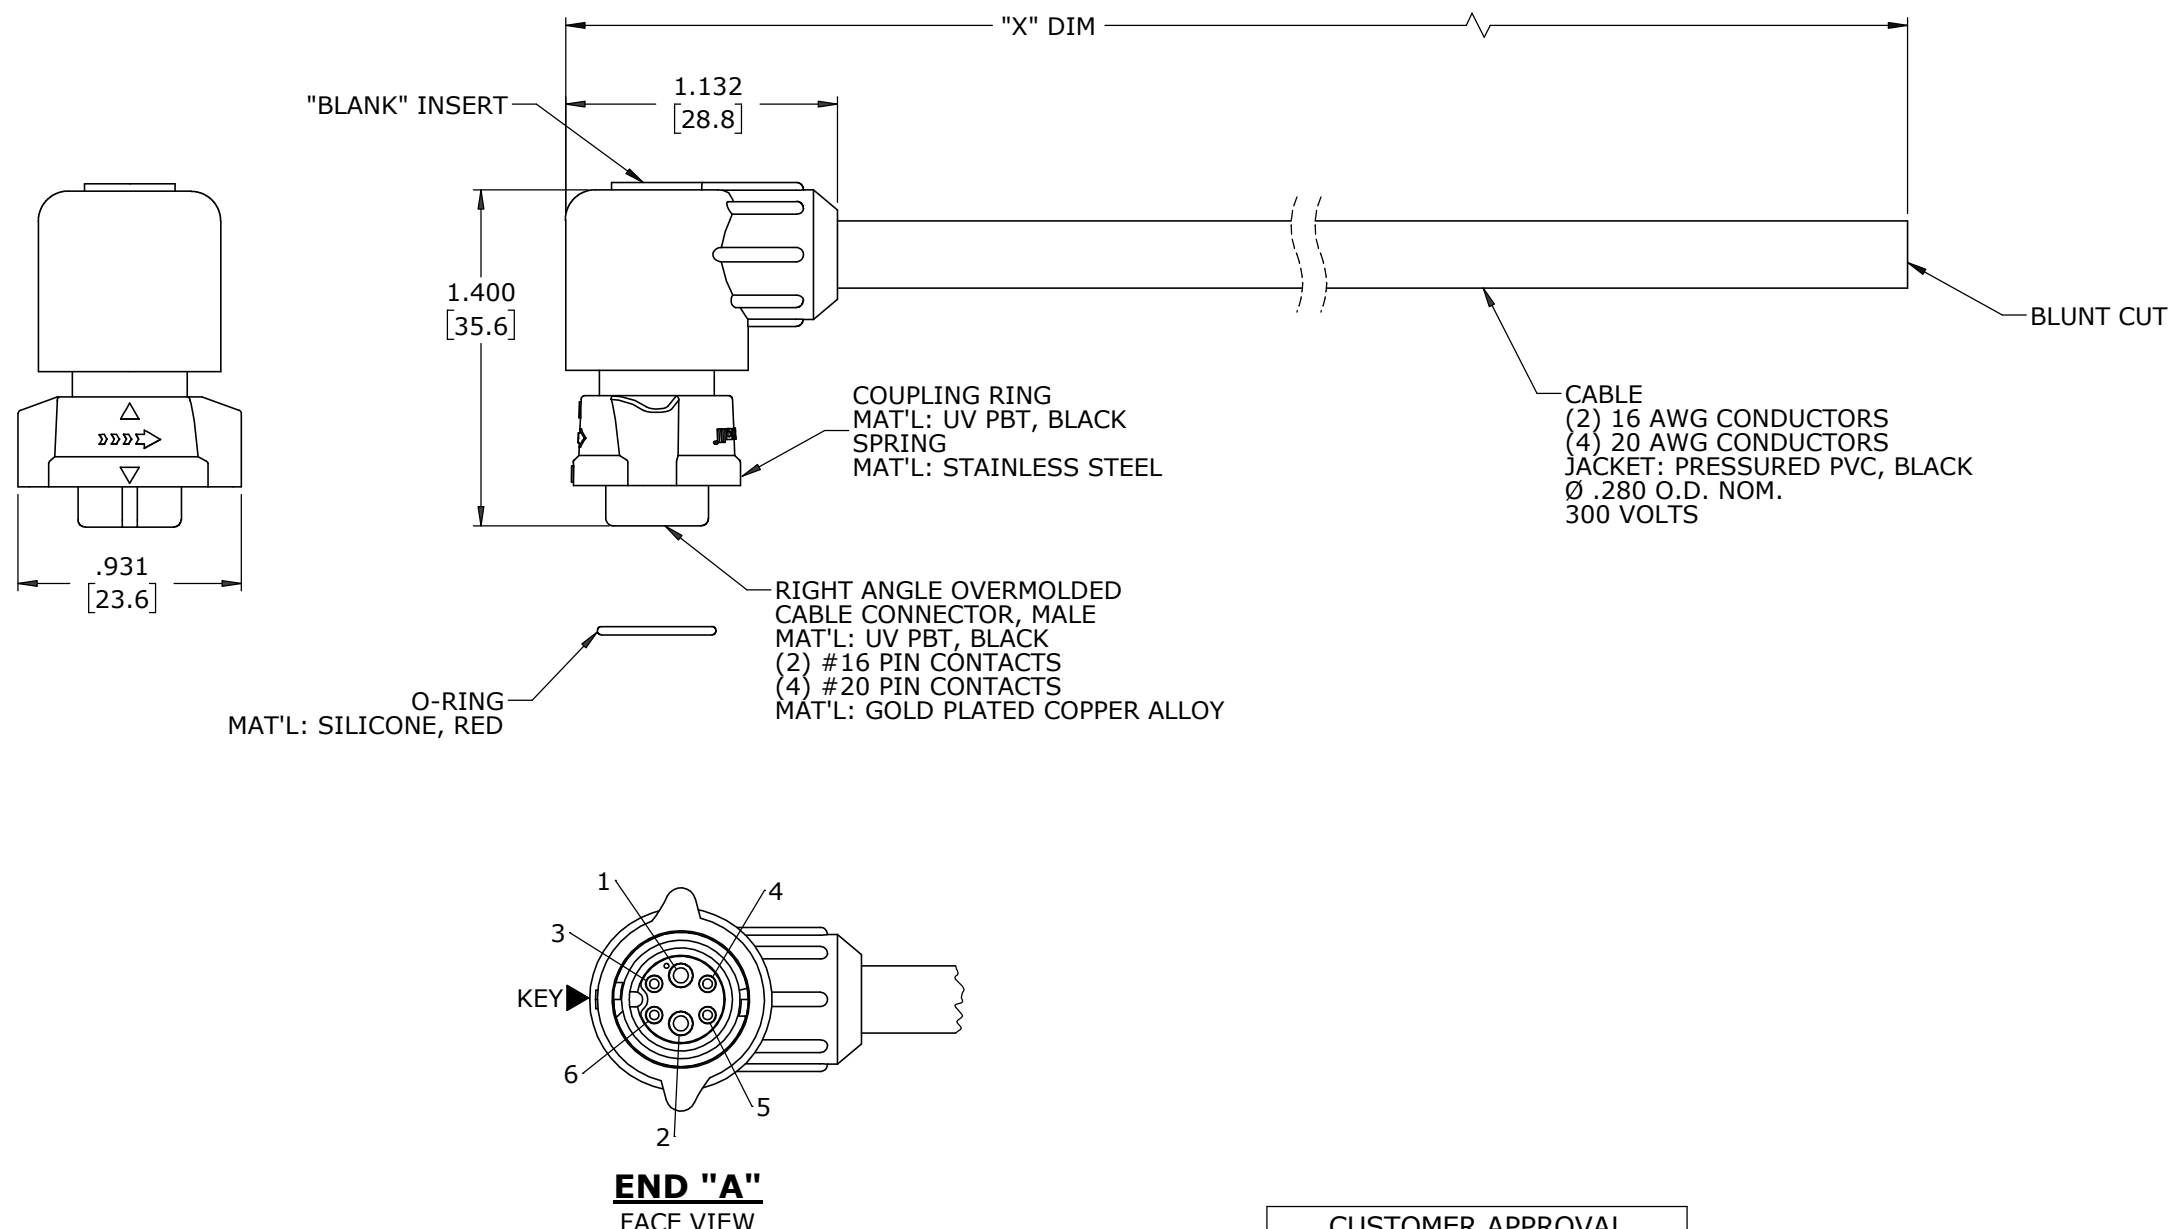

DIMENSIONS IN BRACKETS [] ARE IN MILLIMETERS UNLESS INDICATED

WIRE COLOR CODE					
POS. 1	POS. 2	POS. 3	POS. 4	POS. 5	POS. 6
BLK	WHT	RED	BLU	GRN	YEL
16 AWG	16 AWG	20 AWG	20 AWG	20 AWG	20 AWG

CUSTOMER APPROVAL

THIS DOCUMENT CONTAINS CONFIDENTIAL INFORMATION PROPRIETARY TO CONXALL CORPORATION. ANY REPRODUCTION, DISCLOSURE, OR USE OF THIS DOCUMENT /INFORMATION IS EXPRESSLY PROHIBITED UNLESS AUTHORIZED IN WRITING BY CONXALL CORPORATION.

APPROVED BY: _____

DATE: _____

RoHS COMPLIANT

A	MA	08-18-21	DRAWING CREATED PER DOR 21-109361DS-1
REV.	INIT.	DATE	DESCRIPTION
	MA	08-18-21	ALL INFORMATION ILLUSTRATED IS THE PROPERTY OF "CONXALL CORPORATION". UNAUTHORIZED DUPLICATION OR DISTRIBUTION OF THIS DOCUMENT IS PROHIBITED.
APPROVED BY:			TITLE:
SCALE: NTS			CABLE ASSEMBLY, RA
SIZE: B			2#16/4#20 PIN CONTACTS
SHEET: 1 OF 1			INSTA-CLICK™ MINI-CON-X MIX SIG BULLET
FILE: CARA6C806PPXXX90			CUSTOMER: STANDARD PRODUCT
DIRECTORY: SLW			PART NUMBER: CARA6C806PPXXX90
			REV A



601 E. WILDWOOD VILLA PARK, IL 60181