

CP3000

Parking Station for Dual Wire Coil Cords

Description

The Transforming Technologies' dual conductor CP3000 parking station provides the user with a jack that will allow an operator to disconnect and leave the dual conductor cord at the workstation without the wrist strap monitoring system alarm sounding.

Used with most commercially available resistance monitors and dual conductor grounding products.

ANSI/ESD S-6.1 and ANSI/ESD-S20.20.




Product Specifications

Dimensions: 1-7/8" x 1 1/4" x 1-1/8"
Screws: Two (2) self tapping screws

Mounting Instructions

1. Select location for the jack, avoiding interference with operators or components.
2. Drill two holes 1/8" (3mm) dia X 5/8" (16mm) deep.
3. Mount the CP3000 using two #10 x 1/2" screws.

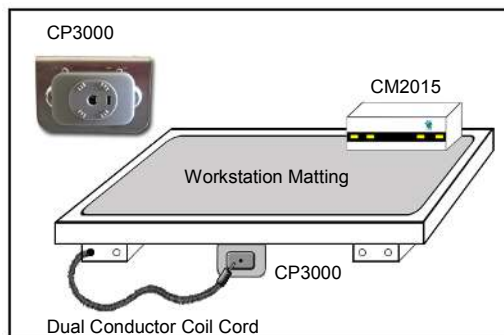

Product Numbers

<i>Item Number</i>	<i>Description</i>
CP3000	Dual Conductor Parking Station
CC3050	5' dual conductor coil cord, grey
CC3100	10' dual conductor coil cord, grey
CC3200	20' dual conductor coil cord, grey
CC7050	Set, dual conductor fabric band, 5' coil cord
CC7100	Set, dual conductor fabric band, 10' coil cord
CC7200	Set, dual conductor fabric band, 20' coil cord
WB5050S	Set, dual band, small, 5' cord, 1meg
WB5100S	Set, dual band, small, 10' cord, 1meg
WB5200S	Set, dual band, small, 20' cord, 1meg
	Specify (M) in place of (S) for medium size band, (L) is place of (S) for large size band
CM2015	Dual wire continuous resistance monitor

This document is prepared for our customers as a service, and is to the best of our knowledge true and accurate. However, it is understood and agreed by the users of this document that we will accept no liability for the conclusions reached. Users of this document may therefore wish to perform additional testing before determining that products mentioned are suitable.



Transforming Technologies, LLC

3719 King Road.
Toledo, OH 43617

Phone: 1.419.841.9552
Fax: 1.419.841.3241
www.transforming-technologies.com

Outstanding Alternatives in Static Control