




CQB75-300S-CMFC(D) SERIES 50-75 WATT 2:1 INPUT ISOLATED DC-DC CONVERTERS

Features

- Efficiency Up to 90%
- Fixed Switching Frequency
- Regulated Outputs
- Remote On/Off
- Low No Load Power Consumption
- Fully protected (OTP/OCP/OVP/UVLO)
- 3000Vac I/O Isolation
- Operating Case Temperature -40 to +100°C
- EN55032/22 for EMC Characteristic
- Shock & Vibration Mil-STD-810F Compliant
- Fire & Smoke EN45545-2 Compliant
- Safety Meets IEC/EN/UL 62368-1
- Build-In EMI Filter
- Chassis Mount, Baseplate Cooled

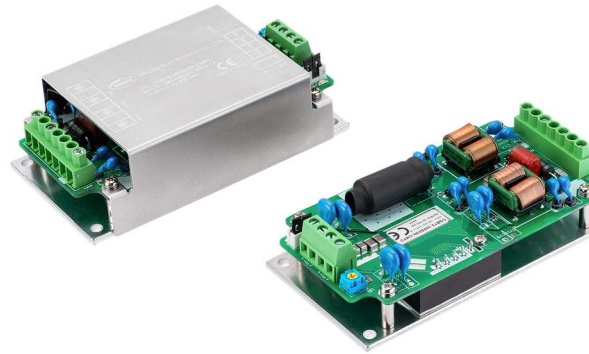

| MODEL NUMBER | INPUT VOLTAGE | OUTPUT VOLTAGE | OUTPUT CURRENT | | INPUT CURRENT | | % EFF. | CAPACITOR LOAD MAX. |
|--|---------------|----------------|----------------|--------|---------------|-----------|--------|---------------------|
| | | | MIN. | MAX. | NO LOAD | FULL LOAD | | |
| CQB75-300S05□-CMFC CQB75-300S05□-CMFD | 180-450 VDC | 5 VDC | 0 mA | 15.0 A | 10 mA | 305 mA | 82 | 15000uF |
| CQB75-300S12□-CMFC CQB75-300S12□-CMFD | 180-450 VDC | 12 VDC | 0 mA | 6.25 A | 10 mA | 284 mA | 88 | 6250uF |
| CQB75-300S15□-CMFC CQB75-300S15□-CMFD | 180-450 VDC | 15 VDC | 0 mA | 5.0 A | 10 mA | 284 mA | 88 | 5000uF |
| CQB75-300S24□-CMFC CQB75-300S24□-CMFD | 180-450 VDC | 24 VDC | 0 mA | 3.12 A | 10 mA | 280 mA | 90 | 3300μF |
| CQB75-300S48□-CMFC CQB75-300S48□-CMFD | 180-450 VDC | 48 VDC | 0 mA | 1.56 A | 10 mA | 281 mA | 89 | 1000μF |

NOTE:

1. Nominal Input Voltage 300 VDC
2. □ = N or none
3. VR is Used for Output Voltage Adjustment.
4. Refer to Application Note for Thermal Resistance and Derating Information.
5. TVS is Included for Input Surge Voltage Protection.
6. Recommend an External Fuse for Input Reverse Polarity Protection (shunt diode is included inside).
7. Output connector CN3 wafer with TAIWAN KING PIN TERMINAL P110I series and mate with JST housing PH series or equivalent.
8. CN1 connection: DINKLE 166-04P5 series or equivalent, suitable electric wire: 18~12AWG (IEC 0.5~4mm²).
9. CN2 connection: DINKLE EK500V-04P series or equivalent, suitable electric wire: 24~12AWG (IEC 0.5~2.5mm²).

PART NUMBER

| Series | Nominal Input Voltage | Number of Outputs | Nominal Output Voltage | Remote On/Off Logic | Chassis Mount Type | |
|--------|-----------------------|-------------------|--|-------------------------------|---------------------------------------|--------------------------------|
| CQB75- | II | O | XX | L | -YYY | Z |
| CQB75 | 300: 300 VDC | S: Single | 05: 5VDC 12: 12VDC 15: 15VDC 24: 24VDC 48: 48VDC | None: Positive N: Negative | CMF: Chassis Mount Built in Filter | C: Open Frame D: With Cover |

Part Number Example:

CQB75-300S12N-CMFC: Chassis Mount, 75W, 2:1 180-450Vdc Input, Single 12Vdc Output, Negative Logic, Open Frame



CQB75-300S CMFC(D) Series

TECHNICAL SPECIFICATIONS

(All specifications are typical at nominal input, full load at 25°C unless otherwise noted.)

ABSOLUTE MAXIMUM RATINGS

| PARAMETER | NOTES and CONDITIONS | Device | Min. | Typ. | Max. | Units |
|----------------------------|----------------------------------|--------|------|------|------|-----------------|
| Input Voltage | Continuous | All | -0.3 | | 450 | V _{dc} |
| Input Surge Voltage | 100ms max. | All | | | 500 | V _{dc} |
| Operating Case Temperature | At the Center Part of Base Plate | All | -40 | | 100 | °C |
| Storage Temperature | | All | -40 | | 105 | °C |

INPUT CHARACTERISTICS

| PARAMETER | NOTES and CONDITIONS | Device | Min. | Typ. | Max. | Units |
|-----------------------------|---|------------------------|------|------------|------|-----------------|
| Operating Input Voltage | | All | 180 | 300 | 450 | V _{dc} |
| Input Under Voltage Lockout | | | | | | |
| Turn-On Voltage Threshold | Full Load | All | 165 | 170 | 175 | V _{dc} |
| Turn-Off Voltage Threshold | Full Load | All | 155 | 160 | 165 | V _{dc} |
| Lockout Hysteresis Voltage | Full Load | All | | 10 | | V _{dc} |
| Maximum Input Current | V _{in} =180V, Full Load | 300S05 Other | | 520 477 | | mA |
| No-Load Input Current | V _{in} =300V, I _o =0A | See Model Number Table | | | | mA |

OUTPUT CHARACTERISTICS

| PARAMETER | NOTES and CONDITIONS | Device | Min. | Typ. | Max. | Units |
|--|--|------------------------|----------------------------|------|------------|-------|
| Voltage Set Point Accuracy | V _{in} =300V, Full Load, T _c =25°C | All | -1.0 | | +1.0 | % |
| Output Voltage Regulation | | | | | | |
| Load Regulation | Full Load to No Load | All | | | ±0.2 | % |
| Line Regulation | V _{in} =High Line to Low Line, Full Load | All | | | ±0.2 | % |
| Temperature Coefficient | T _c =-40°C to 100°C | All | | | ±0.02 | %/°C |
| Output Voltage Ripple and Noise (5Hz to 20MHz bandwidth) | | | | | | |
| Peak-to-Peak | Full load, 1μF ceramic capacitors | 05Vo | | | 100 | mV |
| | | 12Vo | | | 150 | |
| | | 15Vo | | | 150 | |
| | | 24Vo | | | 240 | |
| | | 48Vo | | | 480 | |
| RMS. | | 05Vo | | | 60 | mV |
| | | 12Vo | | | 60 | |
| | | 15Vo | | | 60 | |
| | | 24Vo | | | 100 | |
| | | 48Vo | | | 200 | |
| Output Current Range | V _{in} = 180 to 450V | See Model Number Table | | | | A |
| Over Current Protection | Hiccup Mode. Auto Recovery. | All | 110 | 135 | 160 | % |
| Short Circuit Protection | | All | Continuous, Auto Recovery. | | | |
| External Load Capacitance | Full load (resistive) | See Model Number Table | | | | μF |
| Output Voltage Trim Range | P _o ≤ max rated power, I _o ≤ I _{o,max} | 05Vo Other | -20 | | +10 +20 | % |
| Output Voltage Remote Sense Range | P _o ≤ max rated power, I _o ≤ I _{o,max} % of nominal Vo | 05Vo Other | | | +10 +20 | % |
| Over Voltage Protection | Limited Voltage, % of Nominal Vo | All | 117 | 125 | 140 | % |

EFFICIENCY

| PARAMETER | NOTES and CONDITIONS | Device | Min. | Typ. | Max. | Units |
|-----------|-----------------------|------------------------|------|------|------|-------|
| 100% Load | V _{in} =300V | See Model Number Table | | | | % |



CQB75-300S CMFC(D) Series

DYNAMIC CHARACTERISTICS

| PARAMETER | NOTES and CONDITIONS | Device | Min. | Typ. | Max. | Units |
|---|--|--------|------|------|------|-------|
| Output Voltage Current Transient | | | | | | |
| Error Band | 75% to 100% of I_{o_max} step load change $d_i/d_t=0.1A/us$ (within 1% V_{out} nominal) | All | | | ±5 | % |
| Recovery Time | | All | | | 250 | us |
| Turn-On Delay and Rise Time | | | | | | |
| Full load (Constant resistive load) | | | | | | |
| Turn-On Delay Time, From On/Off Control | $V_{on/off}$ to 10% V_{o_set} , Remote On | All | | 30 | | ms |
| Turn-On Delay Time, From Input | V_{in_min} to 10% V_{o_set} , Power Up | All | | 30 | | ms |
| Output Voltage Rise Time | 10% V_{o_set} to 90% V_{o_set} | All | | 30 | | ms |

ISOLATION CHARACTERISTICS

| PARAMETER | NOTES and CONDITIONS | Device | Min. | Typ. | Max. | Units |
|--|---------------------------------------|--------|------|-------|--------------|----------------------|
| Isolation Voltage (100% factory Hi-Pot tested @2sec.) | 1 minute; Input to Output, | All | | | 3000 4200 | V_{ac} V_{dc} |
| | 1 minute; Input to Case (Base Plate), | All | | | 2500 3500 | V_{ac} V_{dc} |
| | 1 minute; Output to Case (Base Plate) | All | | | 500 700 | V_{ac} V_{dc} |
| Isolation Resistance | Input to Output | All | 100 | | | MΩ |
| Isolation Capacitance | Input to Output | All | | 333 | | pF |
| | Input to Case (Base Plate) | 05Vo | | 2220 | | |
| | | 12Vo | | 1880 | | |
| | | 15Vo | | 1560 | | |
| 24Vo | | | 2000 | | | |
| | 48Vo | | 2080 | | | |
| | Output to Case (Base Plate) | All | | 18800 | | |

FEATURE CHARACTERISTICS

| PARAMETER | NOTES and CONDITIONS | Device | Min. | Typ. | Max. | Units |
|--|--|--------|------|------|------|-------|
| Switching Frequency | Pulse wide modulation (PWM), Fixed | All | 270 | 300 | 330 | KHz |
| On/Off Control, Positive Remote On/Off logic, Refer to -Vin pin. | | | | | | |
| Logic Low (Module Off) | $V_{on/off}$ at $I_{on/off}=0.0uA$, Pin open=Off | All | 0 | | 1.2 | V |
| Logic High (Module On) | $V_{on/off}$ at $I_{on/off}=1.0mA$ | All | 3.5 | | 12 | V |
| On/Off Control, Negative Remote On/Off logic, Refer to -Vin pin | | | | | | |
| Logic High (Module Off) | $V_{on/off}$ at $I_{on/off}=1.0mA$ | All | 3.5 | | 12 | V |
| Logic Low (Module On) | $V_{on/off}$ at $I_{on/off}=0.0uA$, Pin open=On | All | 0 | | 1.2 | V |
| On/Off Current (for both remote on/off logic) | $I_{on/off}$ at $V_{on/off}=3.5-12V$ | All | 0.3 | | 2.1 | mA |
| Off Converter Input Current | Shutdown input idle current | All | | 3 | 5 | mA |
| Over Temperature Shutdown | Temperature at the Center Part of Base Plate, Non-Latching | All | | 110 | | °C |
| Over Temperature Recovery | | All | | 100 | | °C |

GENERAL SPECIFICATIONS

| PARAMETER | NOTES and CONDITIONS | Device | Min. | Typ. | Max. | Units |
|---------------------|--|--------|------|------|------|---------|
| MTBF | $I_o=100%$ of I_{o_max} ; MIL-HDBK - 217F_Notice 1, GB, 25°C | 05Vo | | 466 | | K hours |
| | | 12Vo | | 566 | | |
| | | 15Vo | | 607 | | |
| | | 24Vo | | 700 | | |
| | | 48Vo | | 650 | | |
| Weight | | -CMFC | | 210 | | grams |
| | | -CMFD | | 296 | | |
| Base plate Material | Aluminum | | | | | |
| Potting Material | UL 94V-0 (DC Module) | | | | | |



CQB75-300S CMFC(D) Series

| | | |
|---|---|------------------|
| Shock/Vibration | MIL-STD-810F Compliant | |
| Humidity | 95% RH max. Non Condensing | |
| Altitude | 3000m Operating Altitude, 12000m Transport Altitude | |
| Thermal Shock | MIL-STD-810F | |
| Fire & Smoke | EN45545-2 Compliant | |
| EMI | EN55032 & EN55022 Compliant | Class A |
| ESD | EN61000-4-2 Level 3: Air $\pm 8kV$, Contact $\pm 6kV$ | Perf. Criteria A |
| Radiated immunity | EN61000-4-3 Level 3: 80~1000MHz, 20V/m | Perf. Criteria A |
| Fast Transient | EN61000-4-4 Level 3: On power input port, $\pm 2kV$ | Perf. Criteria A |
| Surge | EN61000-4-5 Level 4: Line to earth, $\pm 4kV$, Line to line, $\pm 2kV$ | Perf. Criteria A |
| Conducted immunity | EN61000-4-6 Level 3: 0.15~80MHz, 10V | Perf. Criteria A |
| Power Frequency Magnetic Field immunity | EN61000-4-8 50/60Hz, 3A/m (r.m.s.) | Perf. Criteria A |
| Application Note Link | CQB75-300S CMFC(D) Series App Notes | |
| Packaging Information Link | Packaging Information | |

Immunity to Environmental Conditions.

| Phenomenon | Reference Clause(s) | Reference Standard | Test Conditions | Result |
|-------------------------------|--|--------------------|--|-------------------------------|
| Vibration Test | MIL-STD-810F Table 514.5C-VIII Figure 514.5C-6 | MIL-STD-810F | Unit are non-operating Vibration Waveform: Random Vibration Frequency: 15 ~ 2000 Hz Total Grms: 4.01997 grms Vibration axis: X、Y、Z axis Duration: 1hr/axis | Vibration Test |
| Shock Test | MIL-STD-810F 516.5 Table 516.5-1 | MIL-STD-810F | Wave form: Sawtooth wave Test Category: Crash Hazard Test for Ground Equipment Duration: 10 ms Peak Acceleration: 75 G Cross-over Frequency: 80 Hz No. of Shock: Each axis 3 times Shock Direction: $\pm X$, $\pm Y$, $\pm Z$ axis | Shock Test |
| Thermal Shock Cycling Test | MIL-STD-810F 503.4 Figure 503.4-1 | MIL-STD-810F | Temperature : $-55^{\circ}C$ to $105^{\circ}C$ Humidity: 95%RH Duration: 8hrs/ 3 times cycling& 4hrs dwell time | Thermal Shock Cycling Test |
| Thermal Humidity Cycling Test | MIL-STD-810F Notice 3 Method 507.4 | MIL-STD-810F | Temperature: $60^{\circ}C$ to $30^{\circ}C$ Humidity: 95%RH Duration: 240 hrs | Thermal Humidity Cycling Test |

EN45545-2 Fire & Smoke Test Conditions.


| Item | Standard | Hazard Level |
|------|---|---------------|
| R22 | Oxygen Index Test EN 45545-2: 2013 EN ISO 4589-2: 2006 | HL1, HL2, HL3 |
| | Smoke Density Test EN 45545-2: 2013 EN ISO 5659-2: 2013 | HL1, HL2 |
| | Smoke Toxicity Test EN 45545-2: 2013 NF X70-100: 2006 | HL1, HL2, HL3 |
| R23 | Oxygen Index Test EN 45545-2: 2013 EN ISO 4589-2: 2006 | HL1, HL2, HL3 |
| | Smoke Density Test EN 45545-2: 2013 EN ISO 5659-2: 2013 | HL1, HL2, HL3 |
| | Smoke Toxicity Test EN 45545-2: 2013 NF X70-100: 2006 | HL1, HL2, HL3 |
| R24 | Oxygen Index Test EN45545-2: 2013 EN ISO 4589-2 | HL1, HL2, HL3 |
| R25 | Glow - Wire Test EN 45545-2:2013 EN 60695-2-11:2001 | HL1, HL2, HL3 |
| R26 | Vertical Flame Test EN 45545-2: 2013 EN 60695-11-10: 2013 | HL1, HL2, HL3 |







CQB75-300S CMFC(D) Series

CHARACTERISTIC CURVE

Power Derating Curve

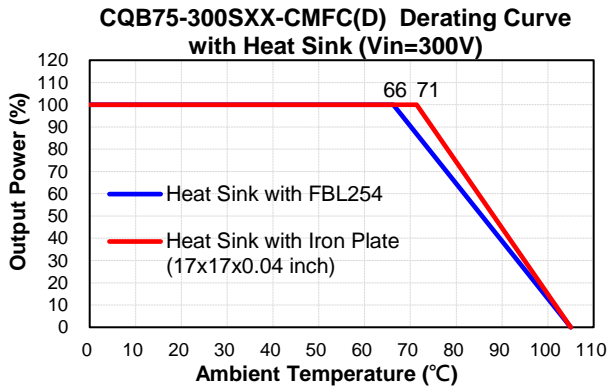


Performance Data

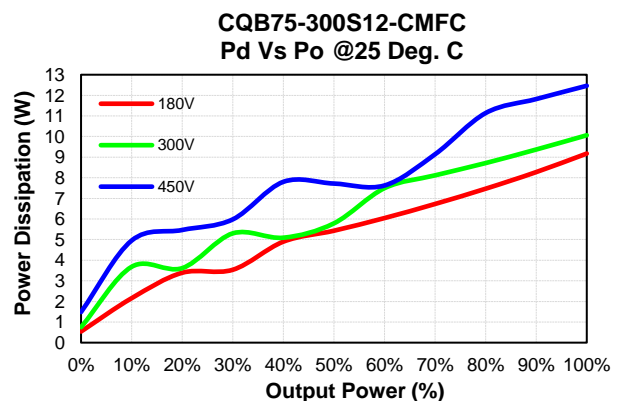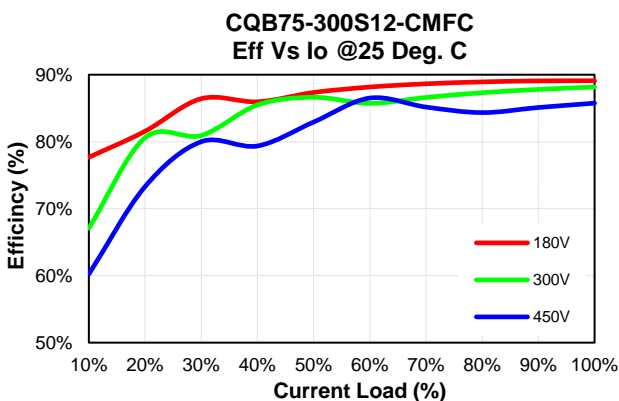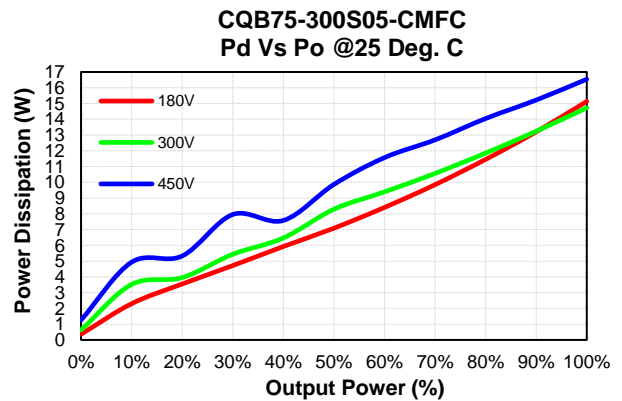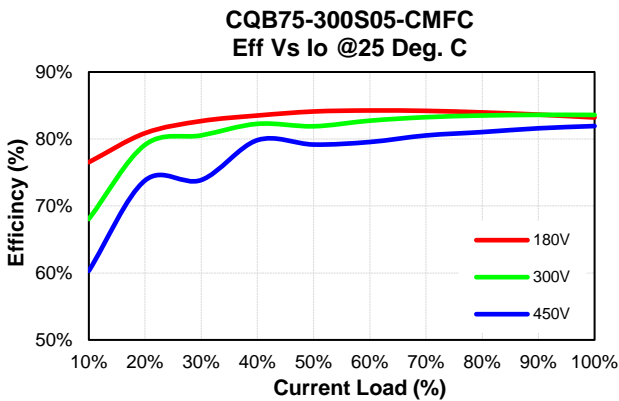




CQB75-300S CMFC(D) Series


CQB75-300S15-CMFC
Eff Vs Io @25 Deg. C

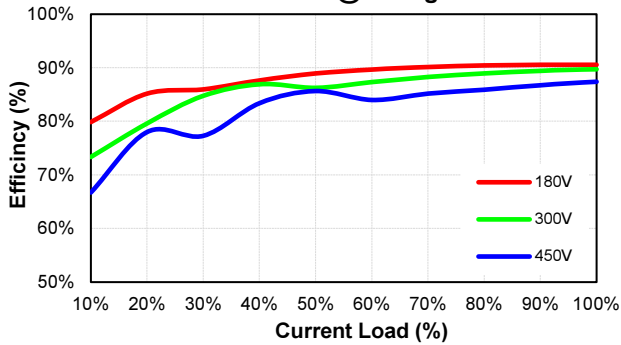


CQB75-300S15-CMFC
Pd Vs Po @25 Deg. C

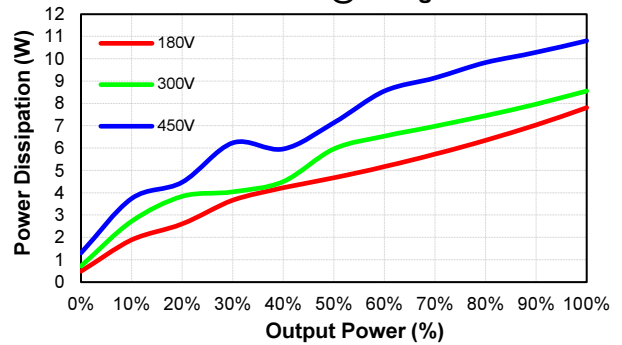


CQB75-300S24-CMFC
Eff Vs Io @25 Deg. C

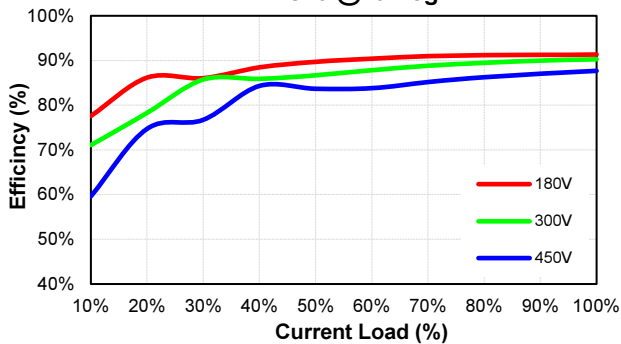


CQB75-300S24-CMFC
Pd Vs Po @25 Deg. C

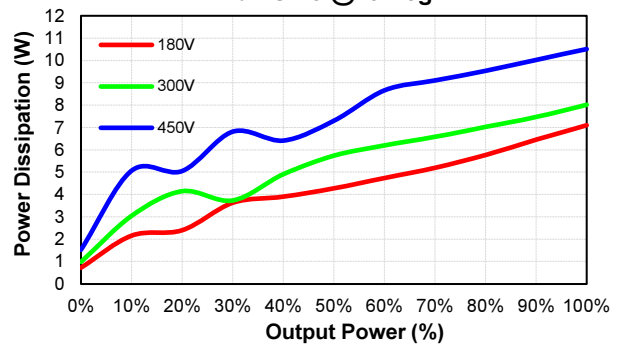

CQB75-300S48-CMFC
Eff Vs Io @25 Deg. C

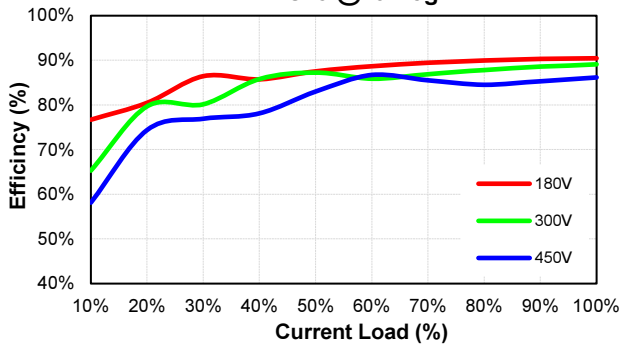



CQB75-300S48-CMFC
Pd Vs Po @25 Deg. C

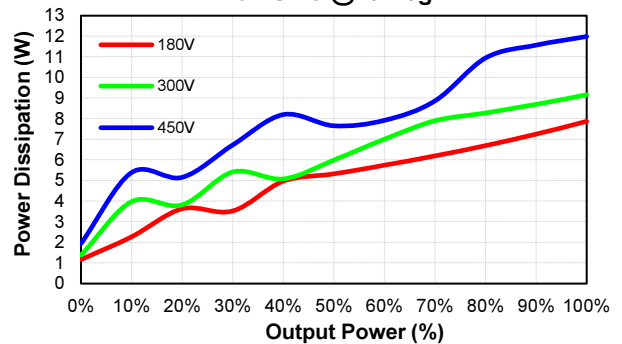



CQB75-300S CMFC(D) Series

MECHANICAL SPECIFICATION

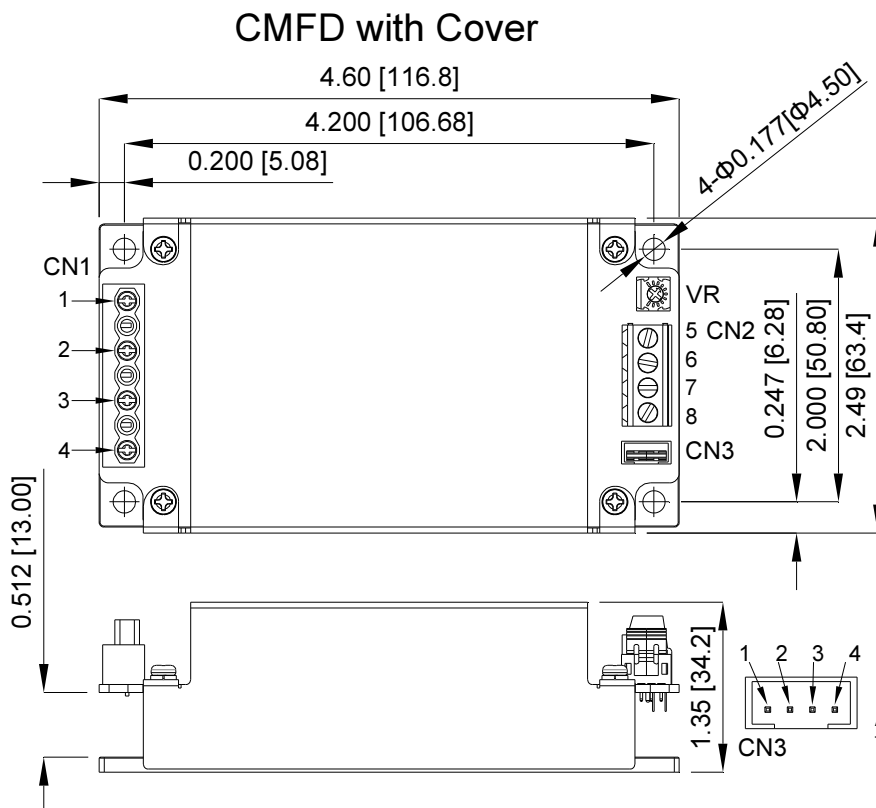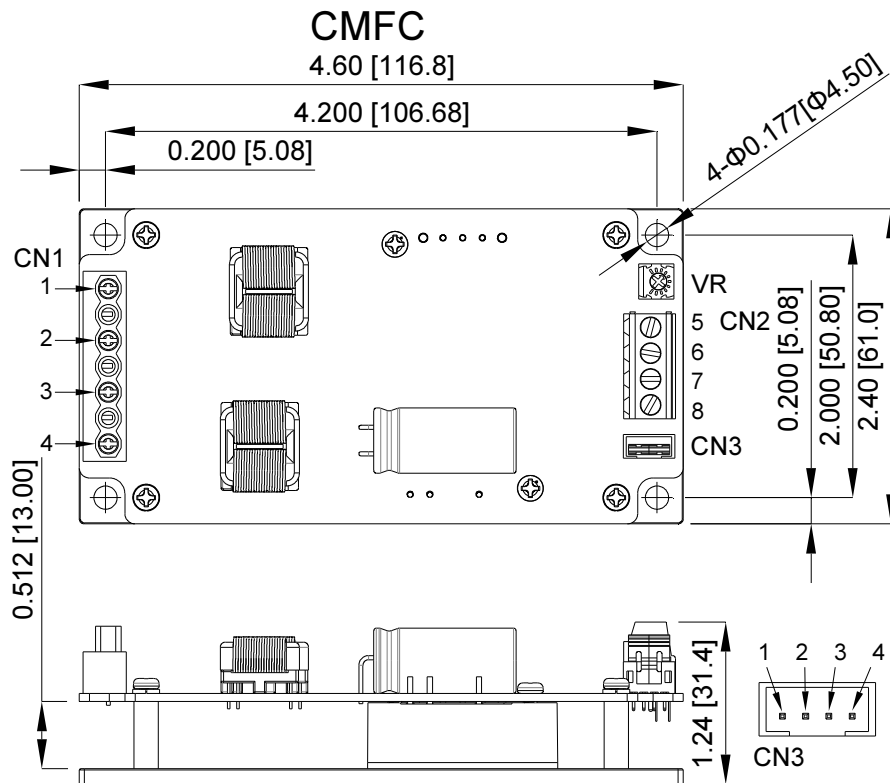

CN1 & CN2 PIN CONNECTION

| PIN | Function |
|-----|-----------|
| 1 | +V Input |
| 2 | -V Input |
| 3 | Remote |
| 4 | Case |
| 5 | +V Output |
| 6 | +V Output |
| 7 | -V Output |
| 8 | -V Output |

CN3 PIN CONNECTION

| PIN | Function |
|-----|-----------|
| 1 | -V Output |
| 2 | -Sense |
| 3 | +Sense |
| 4 | +V Output |

All Dimensions in Inches[mm]
Tolerance Inches: x.xx=±0.02, x.xxx=±0.010
Millimeters: x.x=±0.5, x.xx=±0.25

CINCON Electronics Co. Ltd.
Add: 14F, No. 306, Sec.4, Hsin Yi Rd., Taipei, Taiwan
Tel: 886-2-27086210
Fax: 886-2-27029852
E-mail: sales@cincon.com.tw
Web: www.cincon.com