




REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01	NEW	BATCH PRODUCTION INITIAL RELEASE.	2020.01.08	吳才仙
02	△	依業務要求變更產品溫度敏感等級	2020.10.15	馮國東

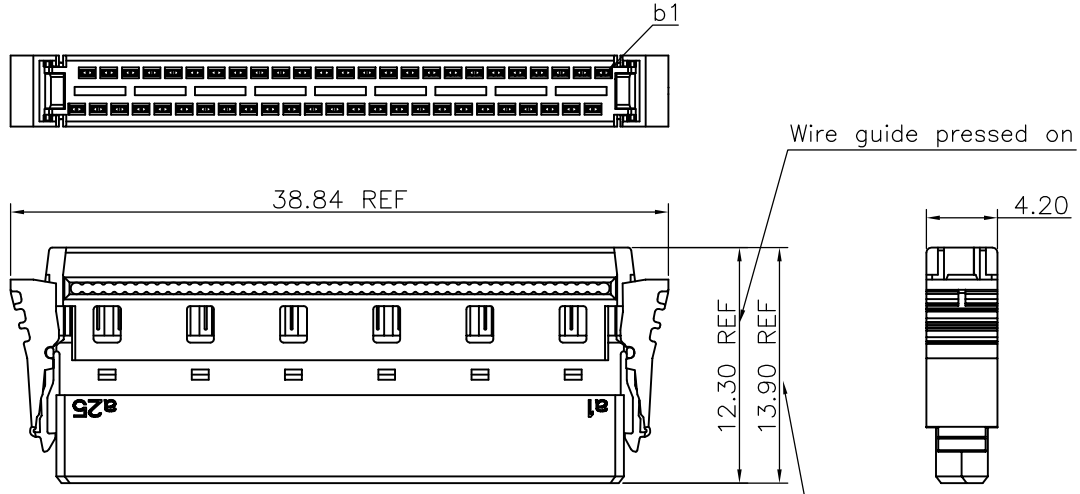

Specifications
 Current Rating:1.1Amp
 Insulation Resistance:10000MΩMin.
 Dielectric Withstanding Voltage:500VAC
 Contact Resistance:10mΩMax.
 △ Moisture sensitivity level:1
 Operating Temperature:-55°C to +125°C
 Materials
 Contact Material:Phosphor Bronze
 Insulator Material:High Temperature Thermoplastic, UL 94V-0 LCP or the equivalent material
 All materials must meet GREENCONN hazardous substances control standards.

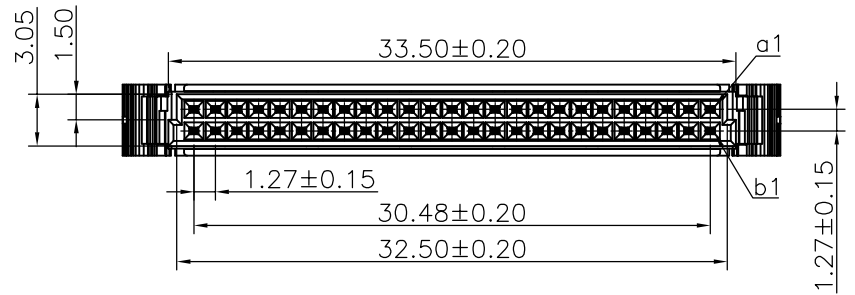

wire guide losse mounted (state at time of supply)

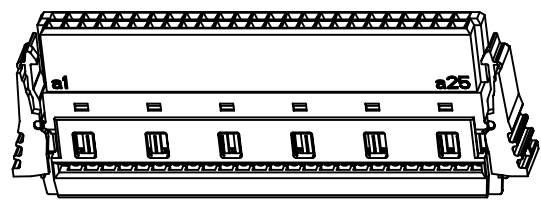

Ordering Information

C QEA217 - XX XX A 001 C 1 S X

No. of Pins per Row: 25
 Standard Plating: 77=15u" gold plating on contact area, matte tin plating on solder area
 Color: 1=Black
 Standard Packing: B=Tray

格稜股份有限公司 Greenconn Corporation					GENERAL TOLERANCE		DESIGNED: 馮國東	DATE: 2020.10.15	DWG. NO.	TITLE: IDC Female Connector Type B with Locking Latches
					X.*±5.0'	X.±0.30	CHECKED: 曹熙	DATE: 2020.10.15	CQEA217-CA1CS	
REV. 02	UNIT. mm	SCALE. 5:2	PAGE. 1/1	.X*±3.0'	.X±0.25	CO SIGNED: 廖世龍	DATE: 2020.10.15	PART NO.	CQEA217-25XXA001C1SB	
				.XX*±2.0'	.XX±0.15	APPROVED: 曹熙(代)	DATE: 2020.10.15			
				.XXX*±1.0'	.XXX±0.10					