

# TECHNICAL SPECIFICATION

## FOR

### MANGANESE DIOXIDE LITHIUM BATTERY

### TYPE:CR2450

Document No.	TMMQ/GPTD-BPS570	Effective date	2021-01-18
Edition	A00	Pages	Total 7 pages
Compiled		Revision	
Auditing		Approved	

Guangdong TIANQIU Electronics Technology Co. Ltd.

ADD: 9/F TianQiu Business Building No.16-30, He Yi Rd., San Yuan Li Ave., GuangZhou China

Tel: 8620-36322277 Fax: 8620-36323339 P.C:510410

Website: <http://www.tmmq.cn> Email: [office@tmmq.com](mailto:office@tmmq.com)

## 1. Scope

This specification is applicable to the Manganese Dioxide Lithium Battery CR2450 supplied by Guangdong TIANQIU Electronics Technology Co. Ltd.

## 2. Designations

### 2.1 Defining


At the temperature of  $20 \pm 2^\circ\text{C}$ , loading at  $7.5\text{k}\Omega$  continuous discharge, till the voltage down to 2.0V

## 3. Designations and Dimensions

### 3.1 Designations :

Manganese Dioxide Lithium Battery CR2450

### 3.2 Dimensions

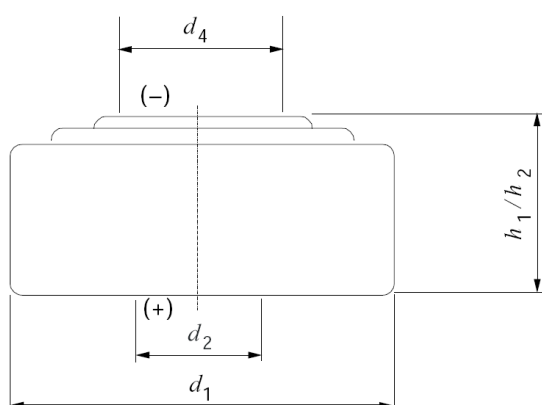

SPEC code	specification standard(mm)	
	MAX	MIN
h1/h2	5.0	4.6
d1	24.5	24.2
d2		-
d4		8.0

Note: h1 battery maximum total height  
 h2 battery positive and negative minimum distance between contacting surfaces  
 d1 Maximum and minimum diameter of the battery  
 d2 minimum diameter of the anode contact area  
 d4 minimum diameter of the cathode surface

## 4 . Product characteristic

Item	Characteristic
Nominal capacity	620mAh /1.86Wh
Nominal voltage	3.0V
Discharge Voltage	2.0 V
Suggested continuously discharge	0.4mA
Suggested maximum pulse current	18mA

Service temperature	-20~60°C
Storage Temperature	0°C ~ 35°C
Storage humidity	45% ~ 75 % RH (no condensate)
Dimensions	maximum height:5.0mm Maximum diameter: Φ24.5mm
Approximate weight	6.7g

## 5. Technical requirements

### 5.1 Test conditions

Unless otherwise specified, the test conditions shall be, as a general rule, at the temperature of 20±2°C and the relative humidity of 60±15%.

### 5.2 Electrical characteristics

NO.	Item	Test condition	Requirement
5.2.1	storage characteristics	Sampling plan : MIL-STD-105E, General Inspection Lever II, Single Sampling, AQL=0.4 Remark: Load voltage test method: 7.5KΩ/1S, The initial samples shall be tested within 30 days after delivery	Open Circuit Voltage(V)    load voltage(V) Initial :            3.10-3.50            3.0-3.40 12 months @ RT: 3.0-3.40    3.0-3.40
5.2.2	Service output	Load resistance: 7.5kΩ; Discharge method:24h/d continuously discharge; End point voltage 2.0V Remark: The initial samples shall be tested within 30 days after delivery.	Initial≥1500hrs 12 months @ RT≥1470hrs
5.2.3	Temperature characteristics	Load resistance: 7.5kΩ; Discharge method:24 hrs/d continuously discharge; End point voltage 2.0V	0±2°C≥1360hrs 60±2°C≥1470hrs
5.2.4	Over-discharge	Continuously discharge: 7.5KΩ, End point voltage 1.2V	No leakage, No deformation; N=9, Ac=0, Re=1
5.2.5	High temp. storage	60°C, RH below 70% for 30days	No leakage; N=40, Ac=0, Re=1



5.2.6	Short circuit test	The battery short circuit in 55 °C environment, When the battery shell after the temperature dropped to 55 °C continue to short circuit at least 1 hrs	; No explosion, No fire ; N=5 , Ac=0 , Re=1.
-------	--------------------	--	--

Note: The initial OCV specification 3.2V ~ 3.3V is required by customer, and it is not for the delivery standard but only for reference.

5.2.2&5.2.3 acceptance standard:

- 1) 9 pieces of battery will be tested for each discharging method.
- 2) The average discharging time from each discharging method shall be equal to or greater than the specified figure, and no more than one battery has a service output less than 80% of the specified figure.
- 3) One retest is allowed to confirm the results if the first test didn't meet the requirements.

5.3 Expiration date

1 year storage in the conditions of GB/T 8897.1-2013, appendix E part

## 6. Packing and marking

### 6.1 Marking Design



---

**7 . Caution for Use**

- 1) Since the battery is not designed to be charged, there are risks of electrolyte leakage or causing damage to the device if the battery is charged.
- 2) The battery shall be installed with its “+” and “-” polarity in correct position, otherwise may cause the battery to be charged or over-discharged.
- 3) Short-circuiting, heating, disposing of in fire and disassembling the battery are prohibited.
- 4) Battery cannot be forced discharge, which lead to excess internal gas generation and, may result in bulging, leakage and explosion.
- 5) New and used batteries cannot be mix used at the same time, when replaced batteries, it is recommend to replace all and with the same brand type.
- 6) Exhausted batteries should be removed from compartment to prevent over-discharge, which cause leakage and damage to the device.
- 7) Direct soldering is not allowed, which will damage the battery.
- 8) Keep the battery out of the reach of children to prevent swallow, in case of accident should contact physician at once.
- 9) The battery should not be dismantled and deformed.

**caution :**

- » If a battery is leakage and materials contact eyes, flush immediately with running water for at least 15 minutes. Consult an ophthalmologist at once.
- » If battery emits an odor, fever, discoloration, deformation or any abnormal phenomena appeared in the process of use/storage, removed the battery immediately from the device and dispose of the battery.


**8 . Referenced Standards**

IEC 60086-1:2015 Primary Batteries –Part 1: General

IEC 60086-2:2015 Primary Batteries –Part 2: Physical and electrical specifications

IEC 60086-4:2019 Primary Batteries –Part 4: Safety of lithium batteries

9 . Discharge Curves

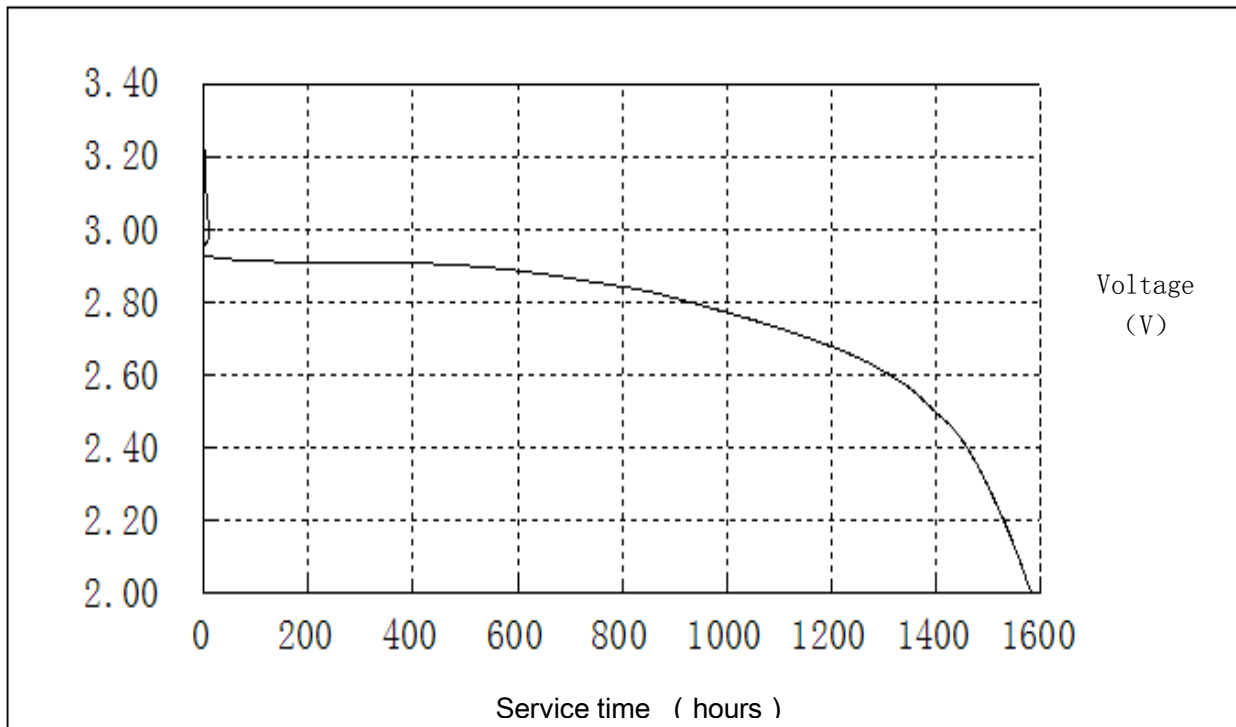

Discharge method:7.5KΩ, 24 hours/day EV 2.0V

temperature of 20±2°C

**10. 修订记录**

Serial Number 序号	Change item 修改项目	Change Content 修改内容	修改人 PIC	修改日期 Date
A01	8	更新标准年份	吴	20200225