

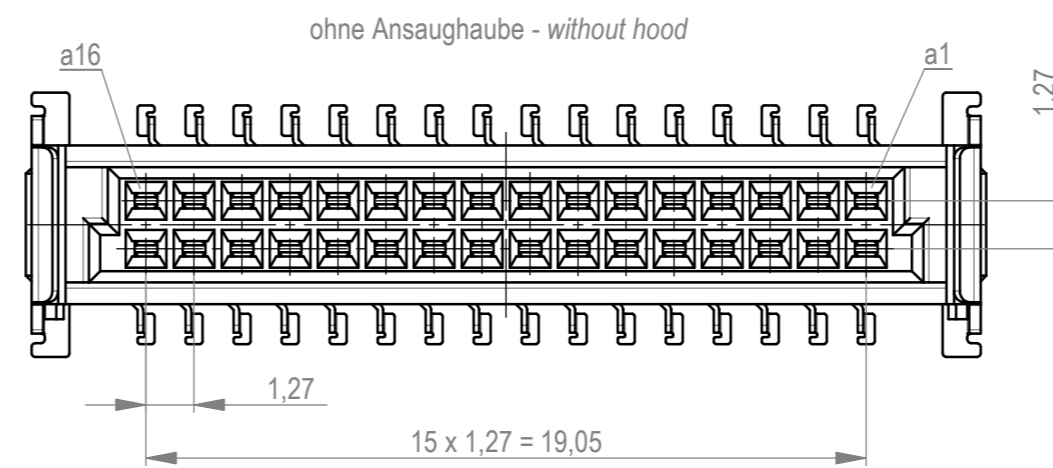
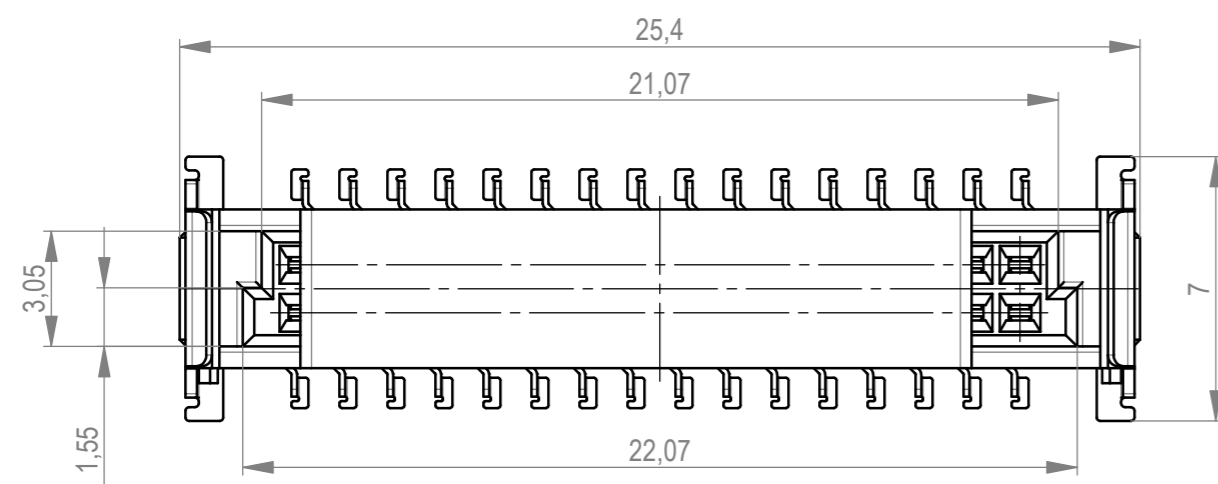


Verpackt im Gurt in Anlehnung an DIN IEC 60286-3
 tape on reel packaging according to DIN IEC 60286-3
 Verpackungseinheit: 280 Stück
 packaging unit: 280 pcs

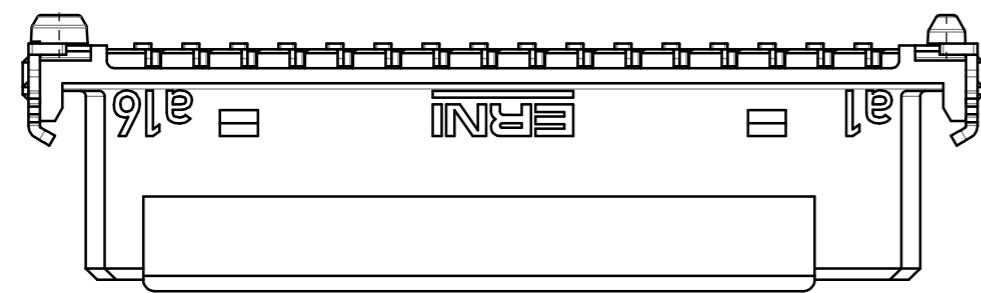

Abspulrichtung - reel off direction

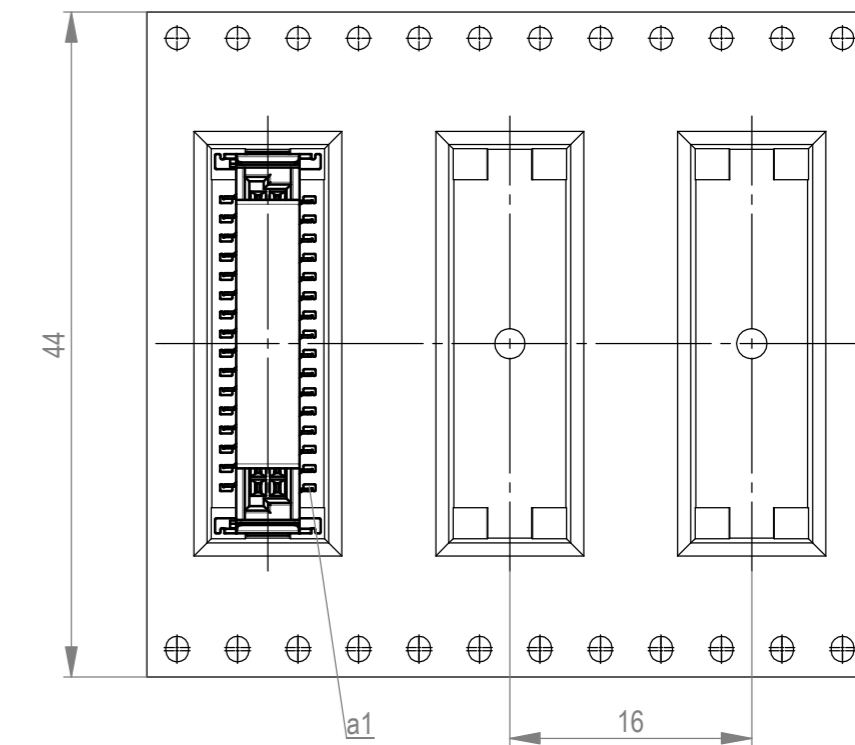


Anforderungsstufe 1
 performance level 1

Kontaktbereich vergoldet
 mating area gold plating

Anschlussbereich verzinkt 4-6 µm
 terminal area 4-6 µm tin plating

Koplanarität der Anschlüsse ≤ 0,1 mm
 coplanarity area of termination ≤ 0,1 mm

Leiterplatten-Layout Vorschlag für SMT
 PCB-Layout Proposal for SMT

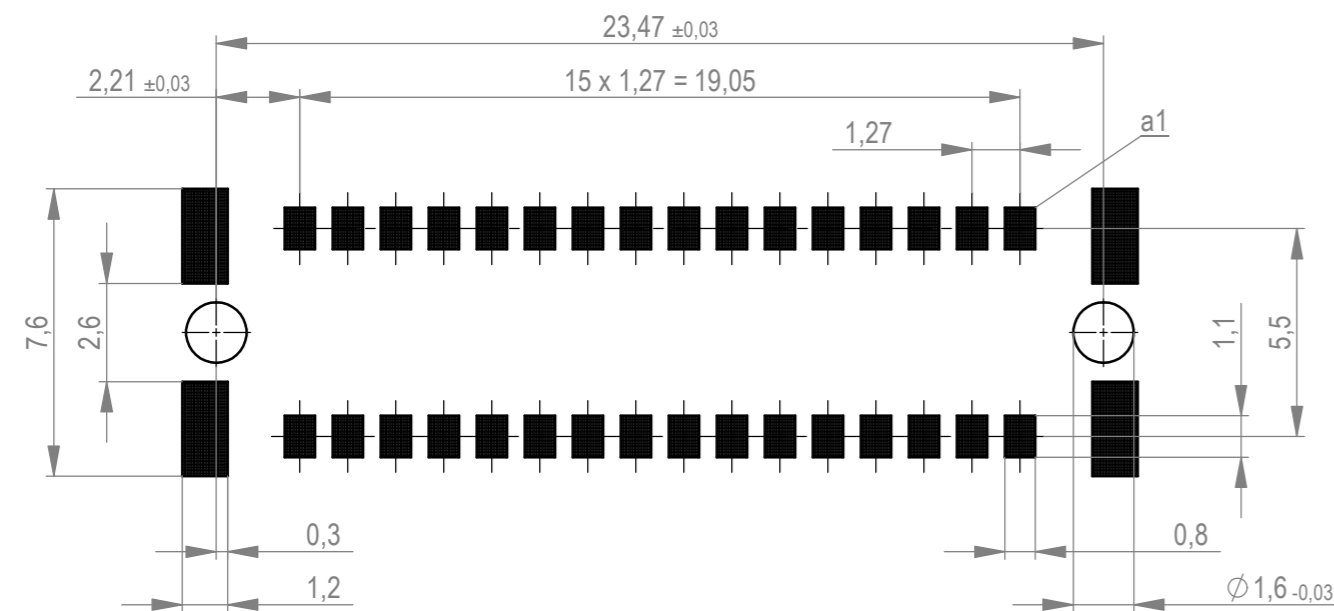

BA 7-13 - 8mm Bauhöhe
 type7-13 - low profile

Die deutsche Version dieser Zeichnung dient nur zur Einreichung der
 Handlung. Bei Abweichungen vom englischen Original gilt das
 englische Original. In case of any deviation from the original
 and any divide from the original.
 The German version of this drawing has been created for
 reference only.
 In case of any deviation from the original, the English version shall prevail.
 The English version of this drawing has been created for
 reference only.
 In case of any deviation from the original, the English version shall prevail.
 The German version of this drawing has been created for
 reference only.
 In case of any deviation from the original, the English version shall prevail.

Dimension no.	Tolerances	Scale	5:1
	ISO 8015	Material	
Customer drawing:	Subject to modification without prior notice. Drawing will not be updated.		
All rights reserved. Only for information. To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.		Federl. SMC-B 32-SMD-BA7-13 Female SMC-B 32-SMD-type7-13 354057	
d	09.06.2021	ERNI International AG Zürichstrasse 72 8306 Brüttisellen - Zürich Switzerland	I
Index	Date	Class	SMCB