


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	GO TO PRODUCTION	17MAY2021	DC	AC

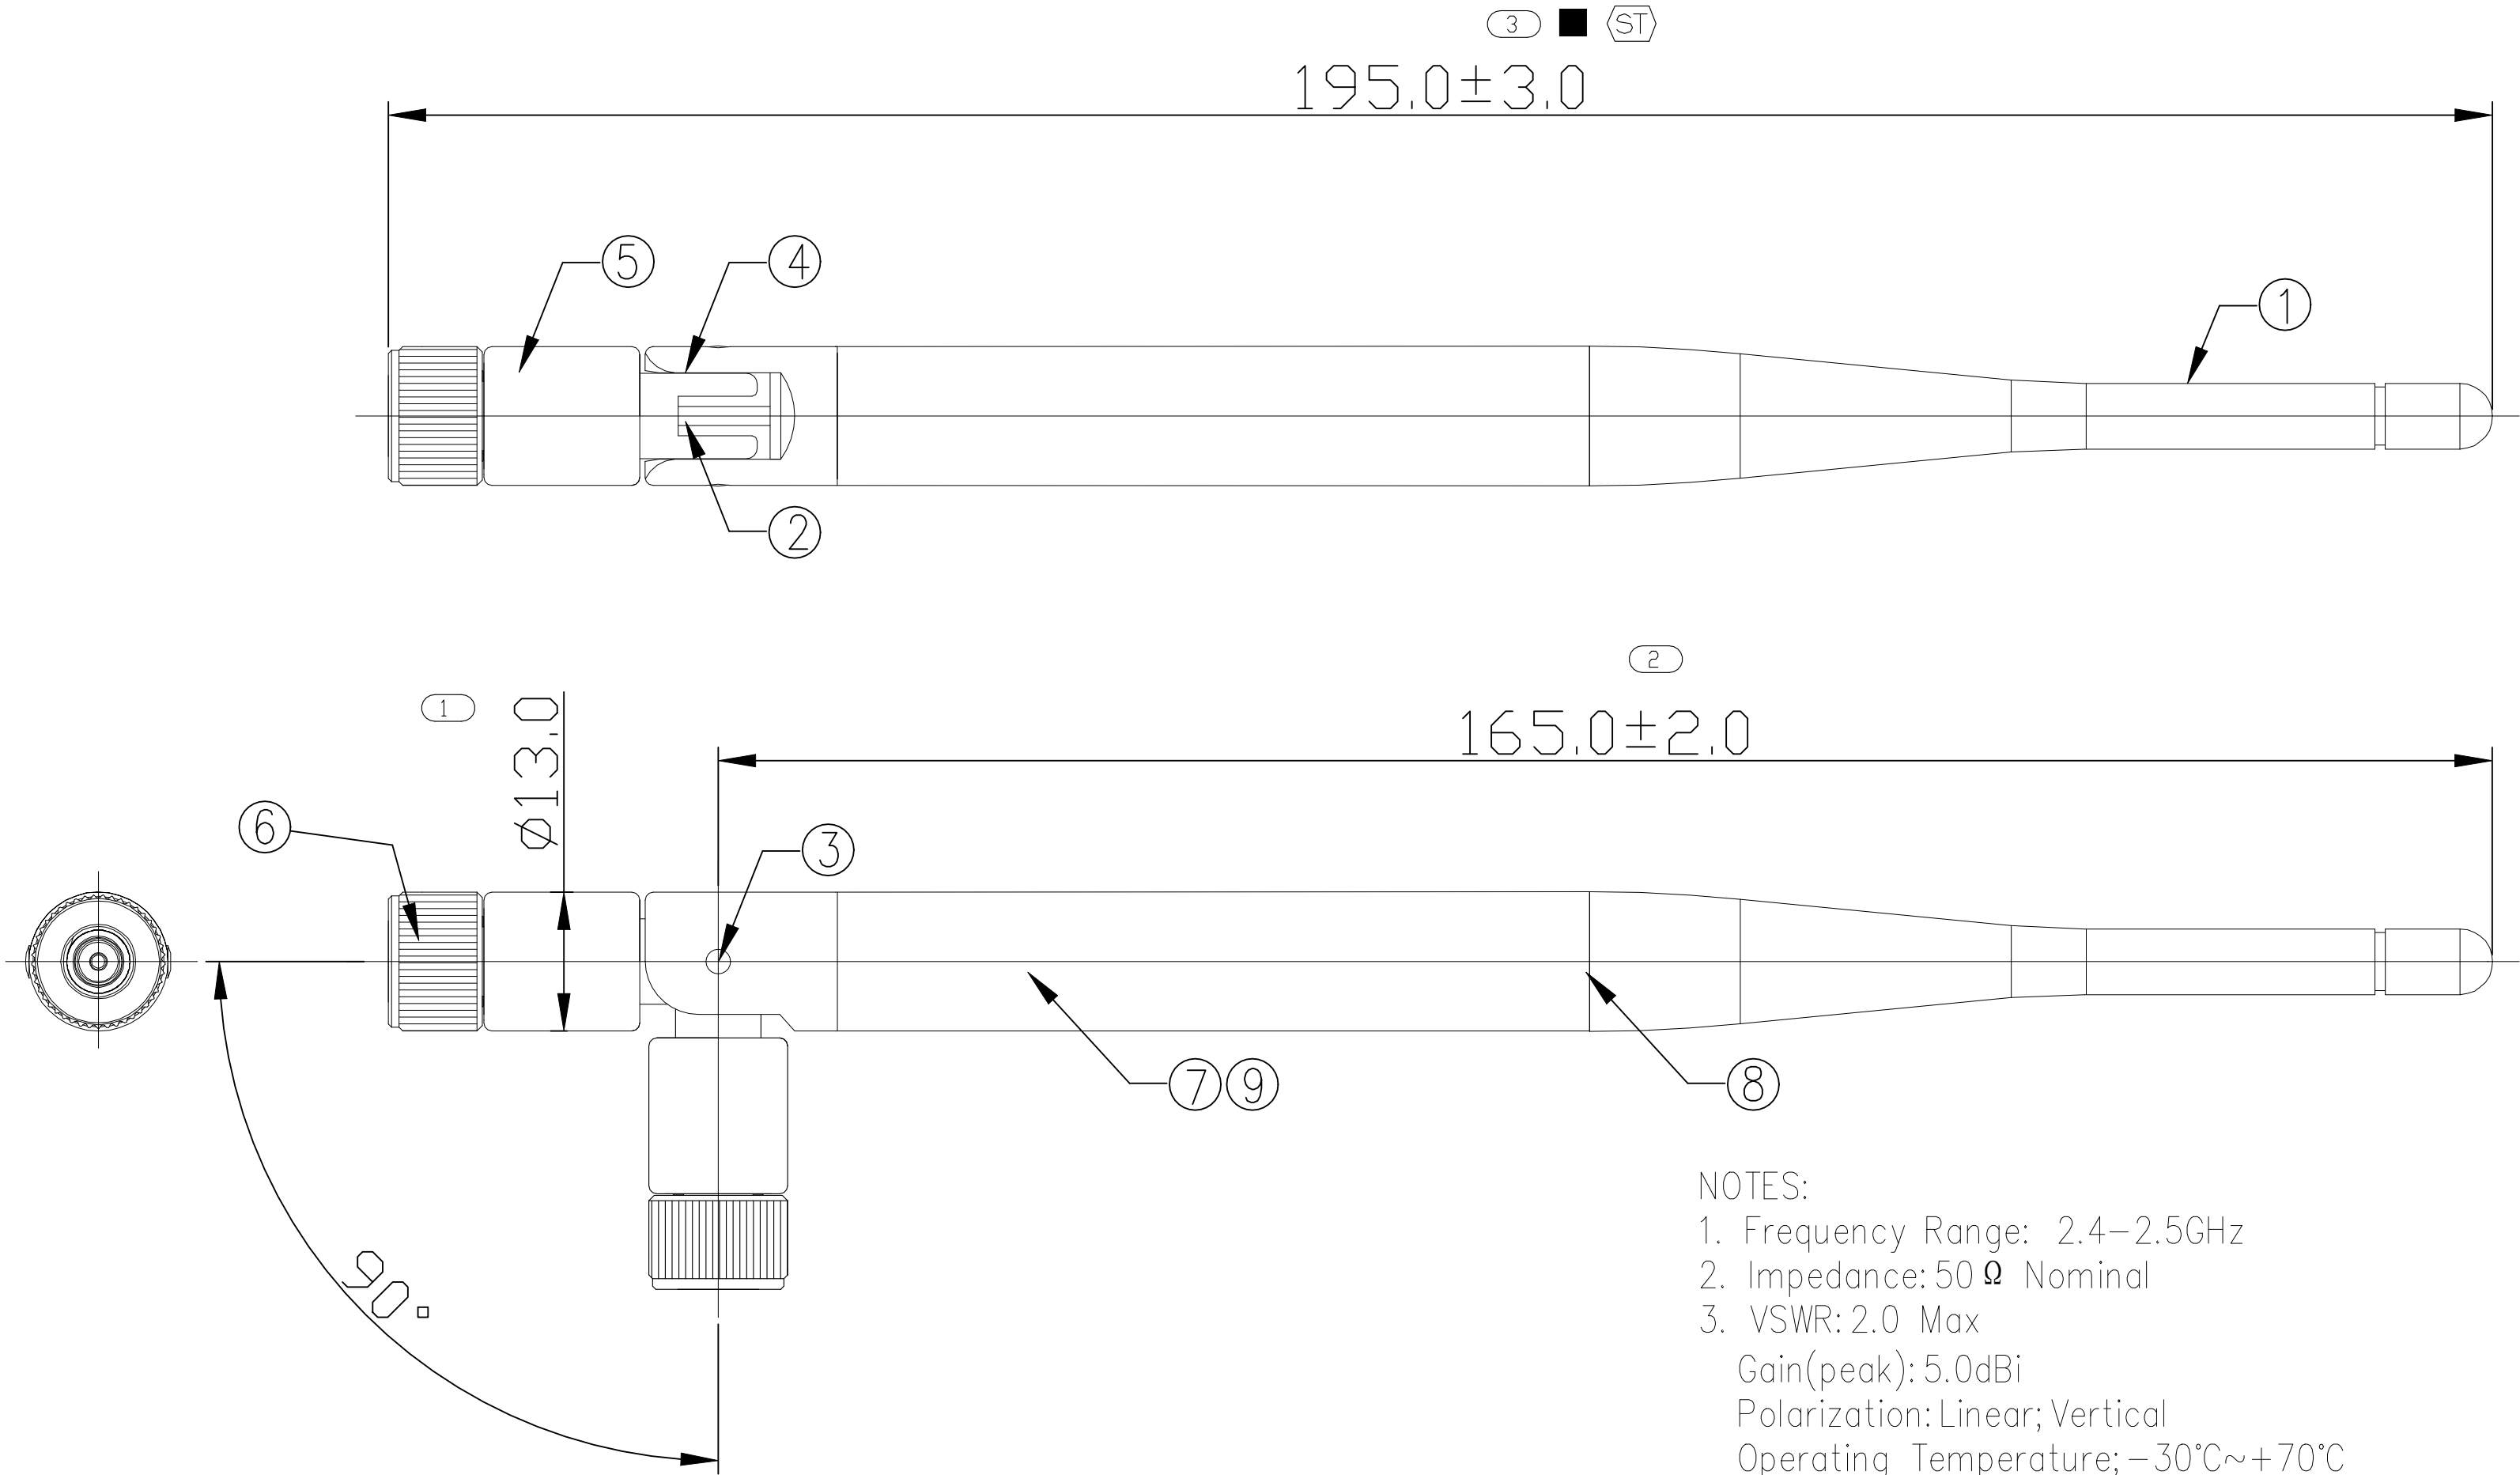

NOTES:
1. Frequency Range: 2.4–2.5GHz
2. Impedance: 50 Ω Nominal
3. VSWR: 2.0 Max
Gain(peak): 5.0dBi
Polarization: Linear; Vertical
Operating Temperature; –30°C~+70°C

4. MATERIALS : REFER TO TABLE.
5. PACKAGING : SINGULARATE PARTS TO BE SECURELY BAG WRAPPED, BAGGED OR VACUM PACKAGE INBULK
6. CONSULT TE CONNECTIVITY DATASHEET DS 2195899

⑨	H.S.T	Heat shrink tube	1PC
⑧	Spring	Zn–Alloy/SUS304	1PC
⑦	Copper tube	Brass	1PC
⑥	Connector	RSMA Plug, Shell with black pom Plastic	1SET
⑤	Lower base	PBT Color:black	1PC
④	Upper base	PC Color:black	1PC
③	Pin	POM, Color:black	2PCS
②	Cable	RG178 cable light brown	1PC
①	Radome	TPEE Color:black meet RoHS	1PC
ITEM	NAME	MATERIAL	QTY

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN DC HSIANG 01APR2021	TE Connectivity		
		CHK SHIN HOO 01APR2021			
DIMENSIONS: mm		APVD AMOS CHEAH 01APR2021	NAME External Ant,RP–SMA,Wi–Fi,2.4–2.5GHz		
		PRODUCT SPEC			
		APPLICATION SPEC	SIZE CAGE CODE DRAWING NO RESTRICTED TO		
MATERIAL		WEIGHT 0	A2 00779	C=2195899	—
		CUSTOMER DRAWING	SCALE 1:1	SHEET 1 of 1	REV A