
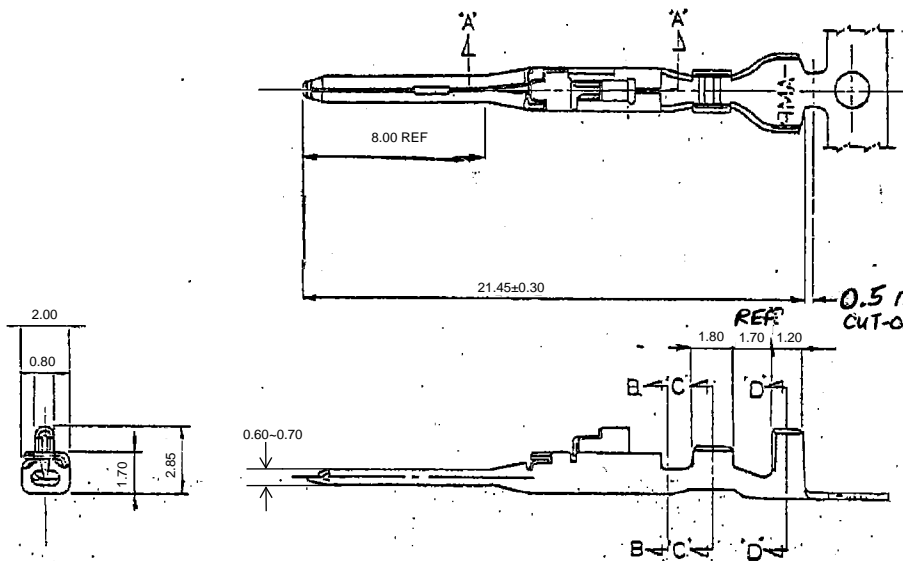




4

3

2

第三角法 (THIRD ANGLE PROJECTION)

断面 C-C
(SECT.)断面 D-D
(SECT.)

注: 1. 通用規格

製品規格 108-5302

取付適用規格 114-5142


2. 取扱説明書 IS-503T

NOTES: 1. APPLICABLE SPEC.

PRODUCT SPEC. 108-5302

APPLICATION SPEC. 114-5142

2. INSTRUCTION SHEET IS-503T

断面 B-B
(SECT.)断面 A-A
(SECT.)

	NYE 製 : 502H-20-UV (NYE : 502H-20-UV 117"カチ才化処理 (APPLIED LUBRICANT OIL))	錫めき溶黄銅 (PRE TINNED BRASS)	175149-3
175153-2		錫めき溶黄銅 (PRE TINNED BRASS)	175149-2
175153-1		錫めき溶銅合金 (PRE TINNED COPPER ALLOY)	175149-1
パラ状端子型番 (L.P P/N)	仕上 (FINISH)	材 料 (MATERIAL)	型 番 (P/N)

		TE Connectivity	
		TE 接続性	
WIRE RANGE	INSULATION DIA	TAB CONTACT AMP. UNIVERSAL POWER CONN.	
0.12-0.35mm (AWG #26-#22)	1.2-2mm	77-コネクタ, アンバーユニバーサルパワーコネクタ	
WIRE MATERIAL	INSULATION	1-12mm	
表参照	表参照	2PLC±0.20	
C2 REV ECR M-006821	DR. TM 9/14	ANGLE±3°	
C1 REV PER ECO-11-005030	RK HMR	SIZE LOC 8P (NO)	
LTR 2E (REVISION RECORD)	DR. CHK. DATE	B J C-175149	
		REV. C4 SHEET	

単位: mm DIMENSIONS IN MM. DO NOT SCALE PRINT

PRINT DATE