

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
B		REVISE PER ECO-14-015233	31MAR2015	LL	SH
B1		MODIFIED AS PER ECR-23-169440	05APR2023	KV	WH

1. MATERIAL: HOUSING - HIGH TEMPERATURE NYLON, BLACK, UL 94V-0, IR REFLOW SOLDERING PROCESS COMPATIBLE
TERMINALS - 0.25[.01] THICK PHOSPHOR BRONZE PLATED WITH 3.81µm[.000150] MINIMUM THICK MATTE TIN IN SOLDER AREA AREA, 1.27µm[.000050] MINIMUM GOLD IN LOCALIZED PLATE AREA. ENTIRE TERMINAL PLATED WITH 1.27µm[.000050] MINIMUM THICK NICKEL.
SHIELD - 0.1[.0039] MIN THICK COPPER ZINC ALLOY, PREPLATED WITH 1.27µm(0.000050)min THICK NICKEL AND HOT TIN DIP ON PCB GROUND TABS.



2. JACK CAVITY CONFORMS TO FCC RULES AND REGULATIONS PART 68, SUBPART F.

3. THIS DIMENSION REPRESENTS THE TOTAL HEIGHT OF THE CONNECTOR FROM THE TOP OF THE PC BOARD.

4. PACKAGED 66 ASSEMBLIES PER PVC TRAY, 396 PER BOX.

5. DIELECTRIC WITHSTANDING VOLTAGE BETWEEN SHIELD AND TERMINAL IS 1500 VAC

6. MANUFACTURING DATE CODE:
ORIENTED AND LOCATED APPROXIMATELY AS SHOWN. LASER PRINTING.
TEXT HEIGHT APPROXIMATELY 2MM.
FIRST 2 DIGITS = LAST 2 DIGITS OF YEAR
NEXT 2 DIGITS = MANUFACTURING WORK WEEK
LAST DIGIT = DAY OF WEEK WITH SUNDAY = 1

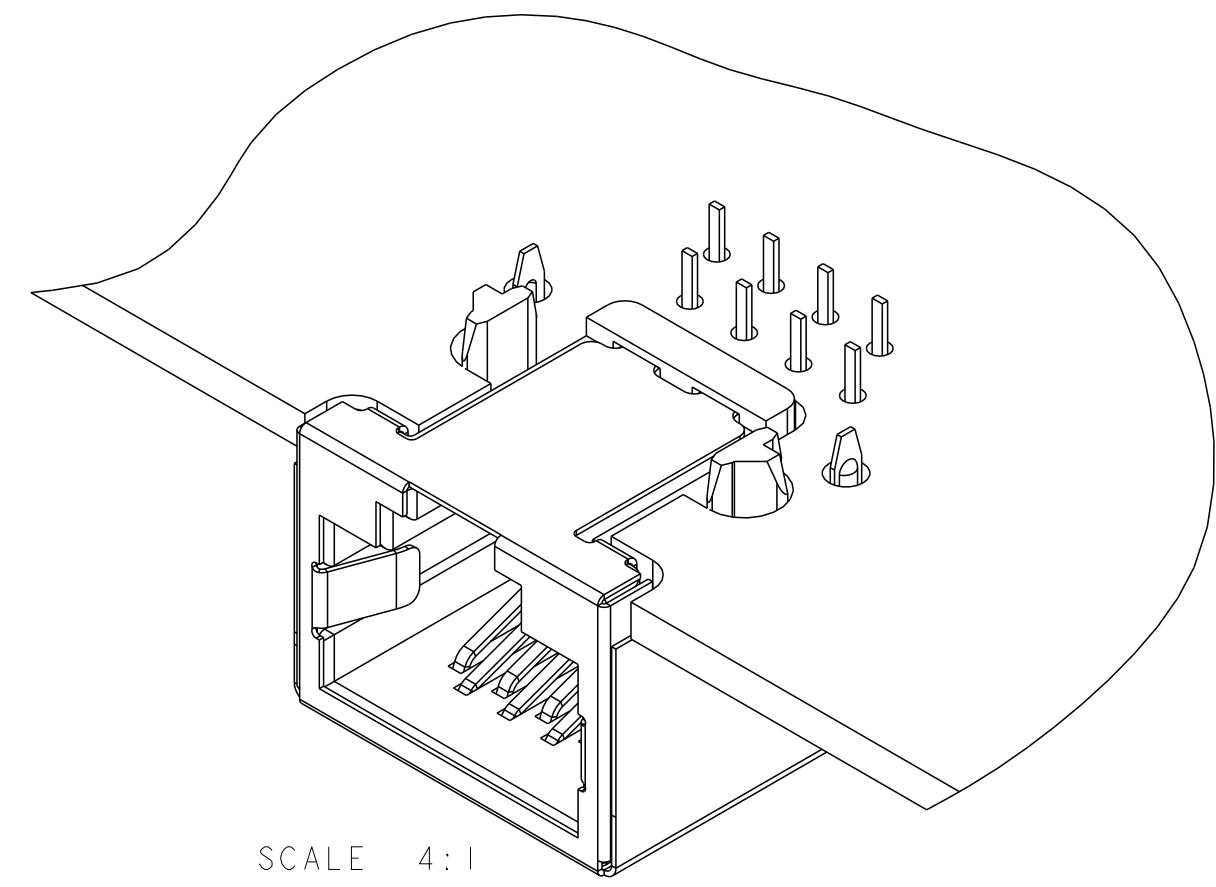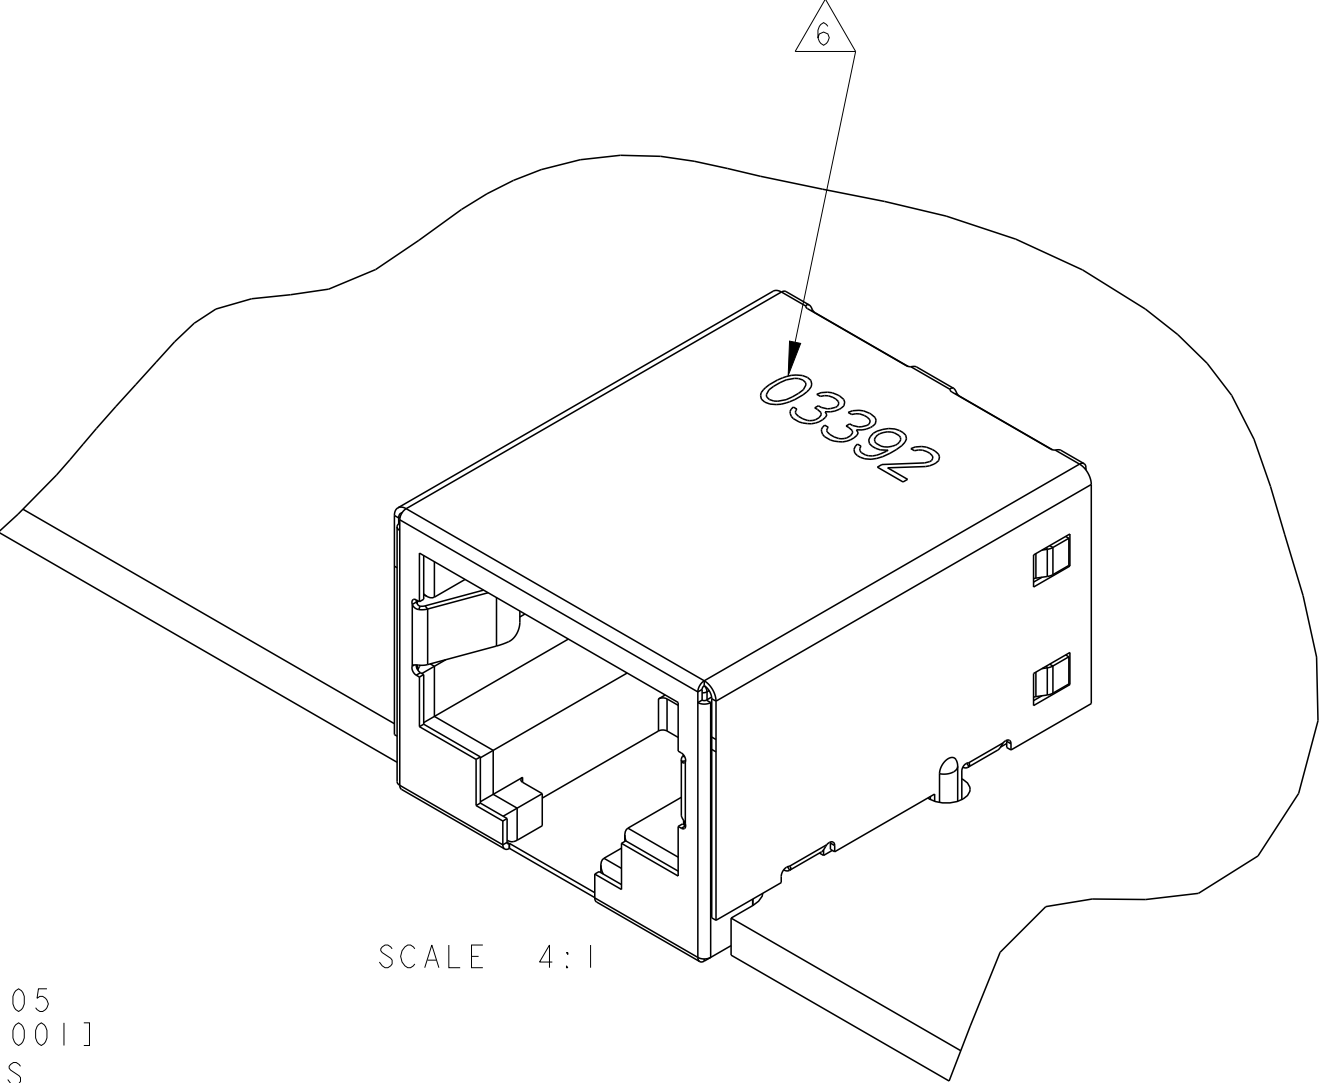

1888543-2
PART
NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J. AHERON 07JUNE2006	TE Connectivity		
DIMENSIONS: mm[INCHES]		CHK J. WESTMAN 07JUNE2006			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD S. FLICKINGER 07JUNE2006	NAME MODULAR JACK ASSEMBLY, 8 POSITION, SHIELDED, 10mm WITHOUT PANEL TABS		
0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ±		PRODUCT SPEC 108-1163	SIZE CAGE CODE DRAWING NO		
MATERIAL SEE NOTE 1		APPLICATION SPEC 114-2048	RESTRICTED TO		
FINISH SEE NOTE 1		WEIGHT 3.49 grams	C=1888543		
CUSTOMER DRAWING		SCALE 4:1	SHEET 1 OF 1		
			REV B1		