
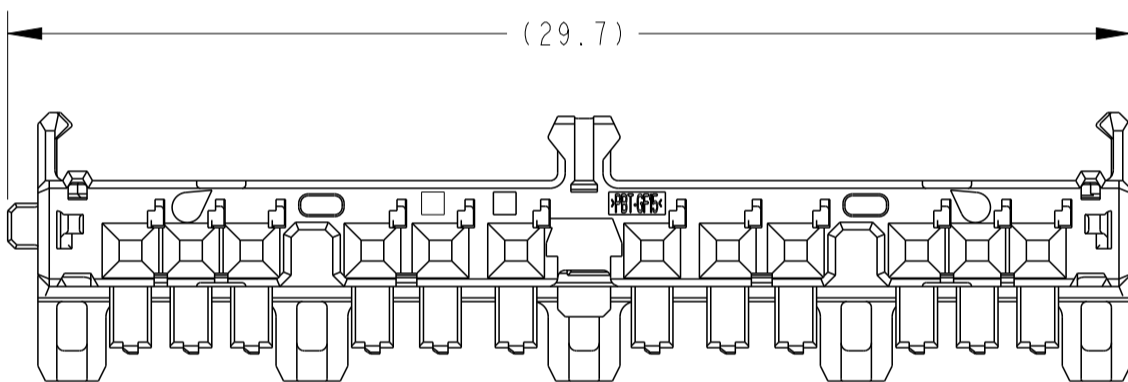
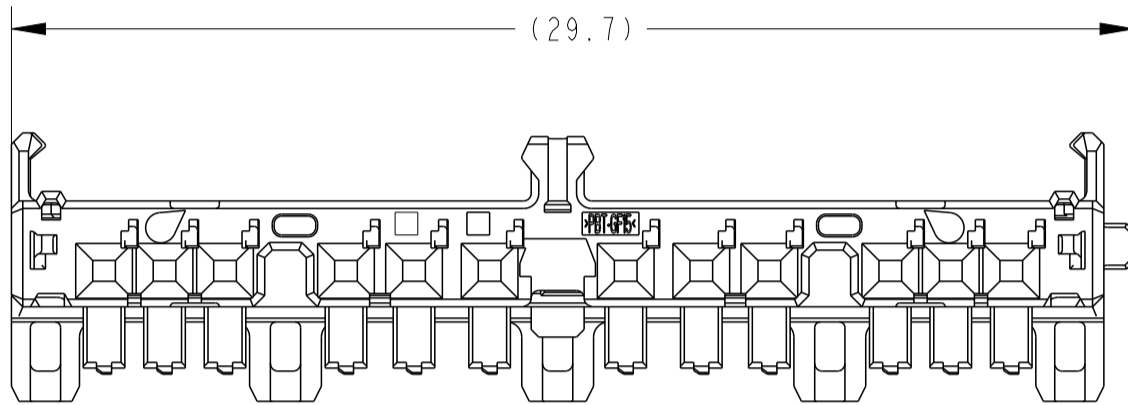
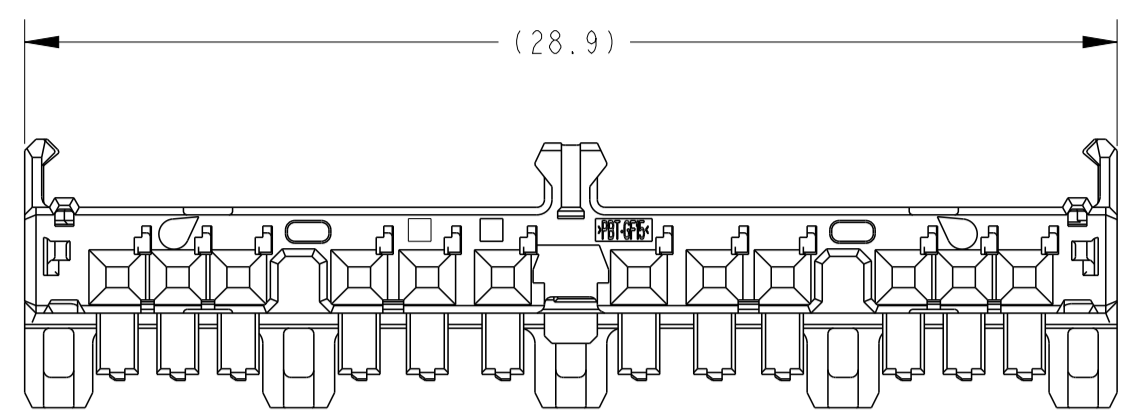
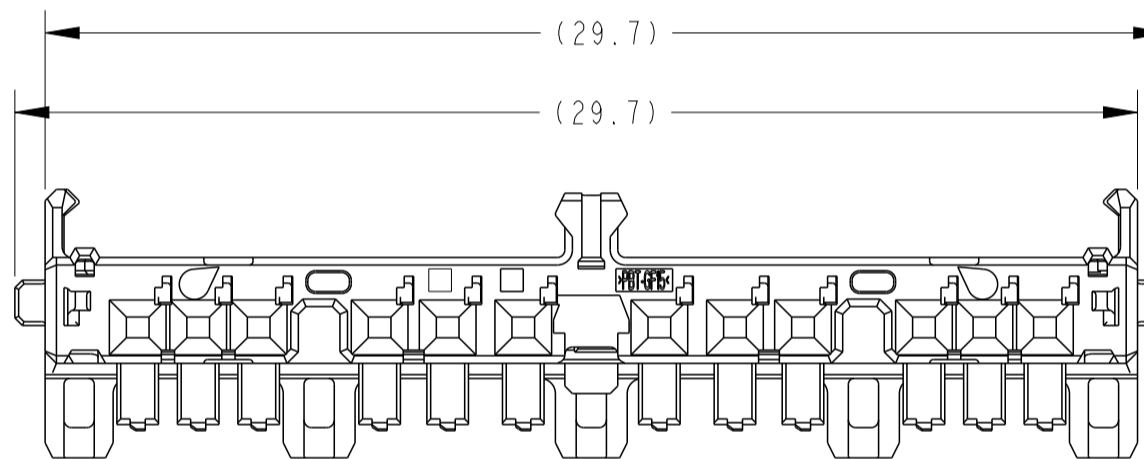
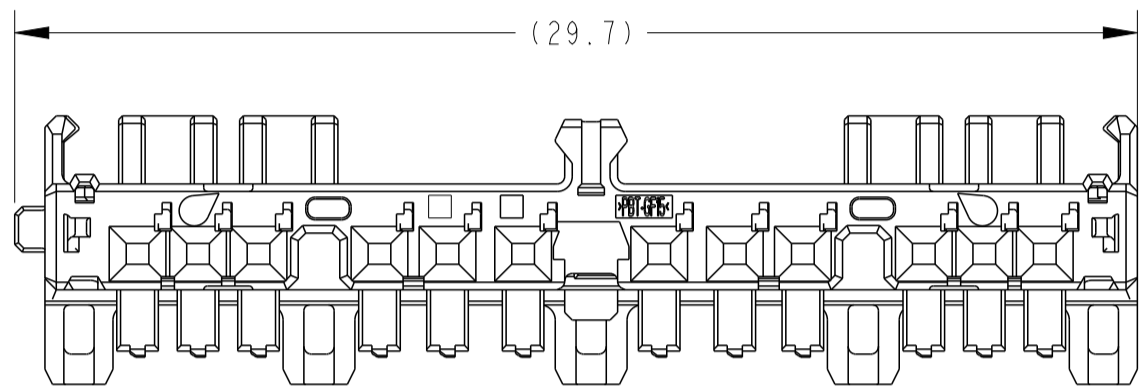
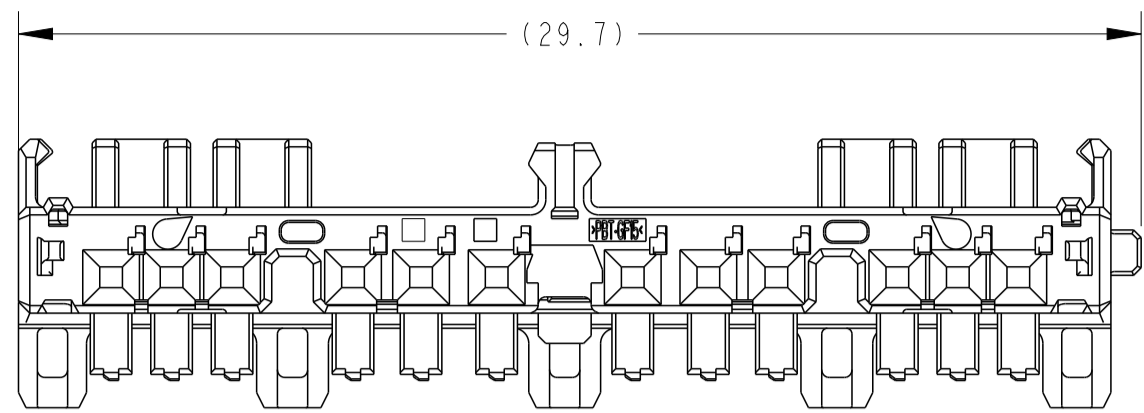


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20

© COPYRIGHT 2017 BY Tyco Electronics Japan G.K. ALL RIGHTS RESERVED.

| LOC | TEST | REVISIONS | | | | | | |
|-----|------|-----------|---------|---------------|--|---------|----|------|
| J | | P | LTR | DESCRIPTION | | DATE | DN | APVD |
| | | B1 | REVISED | ECR-17-002980 | | 15MAR17 | KT | TK |
| | | B2 | REVISED | ECR-18-019662 | | 04FEB19 | SS | RK |
| | | B3 | REVISED | ECR-20-007698 | | 29MAY20 | KT | RK |

 -1, -7, 1--3; AS SHOWN
 -1, -7, 1--3; 本图

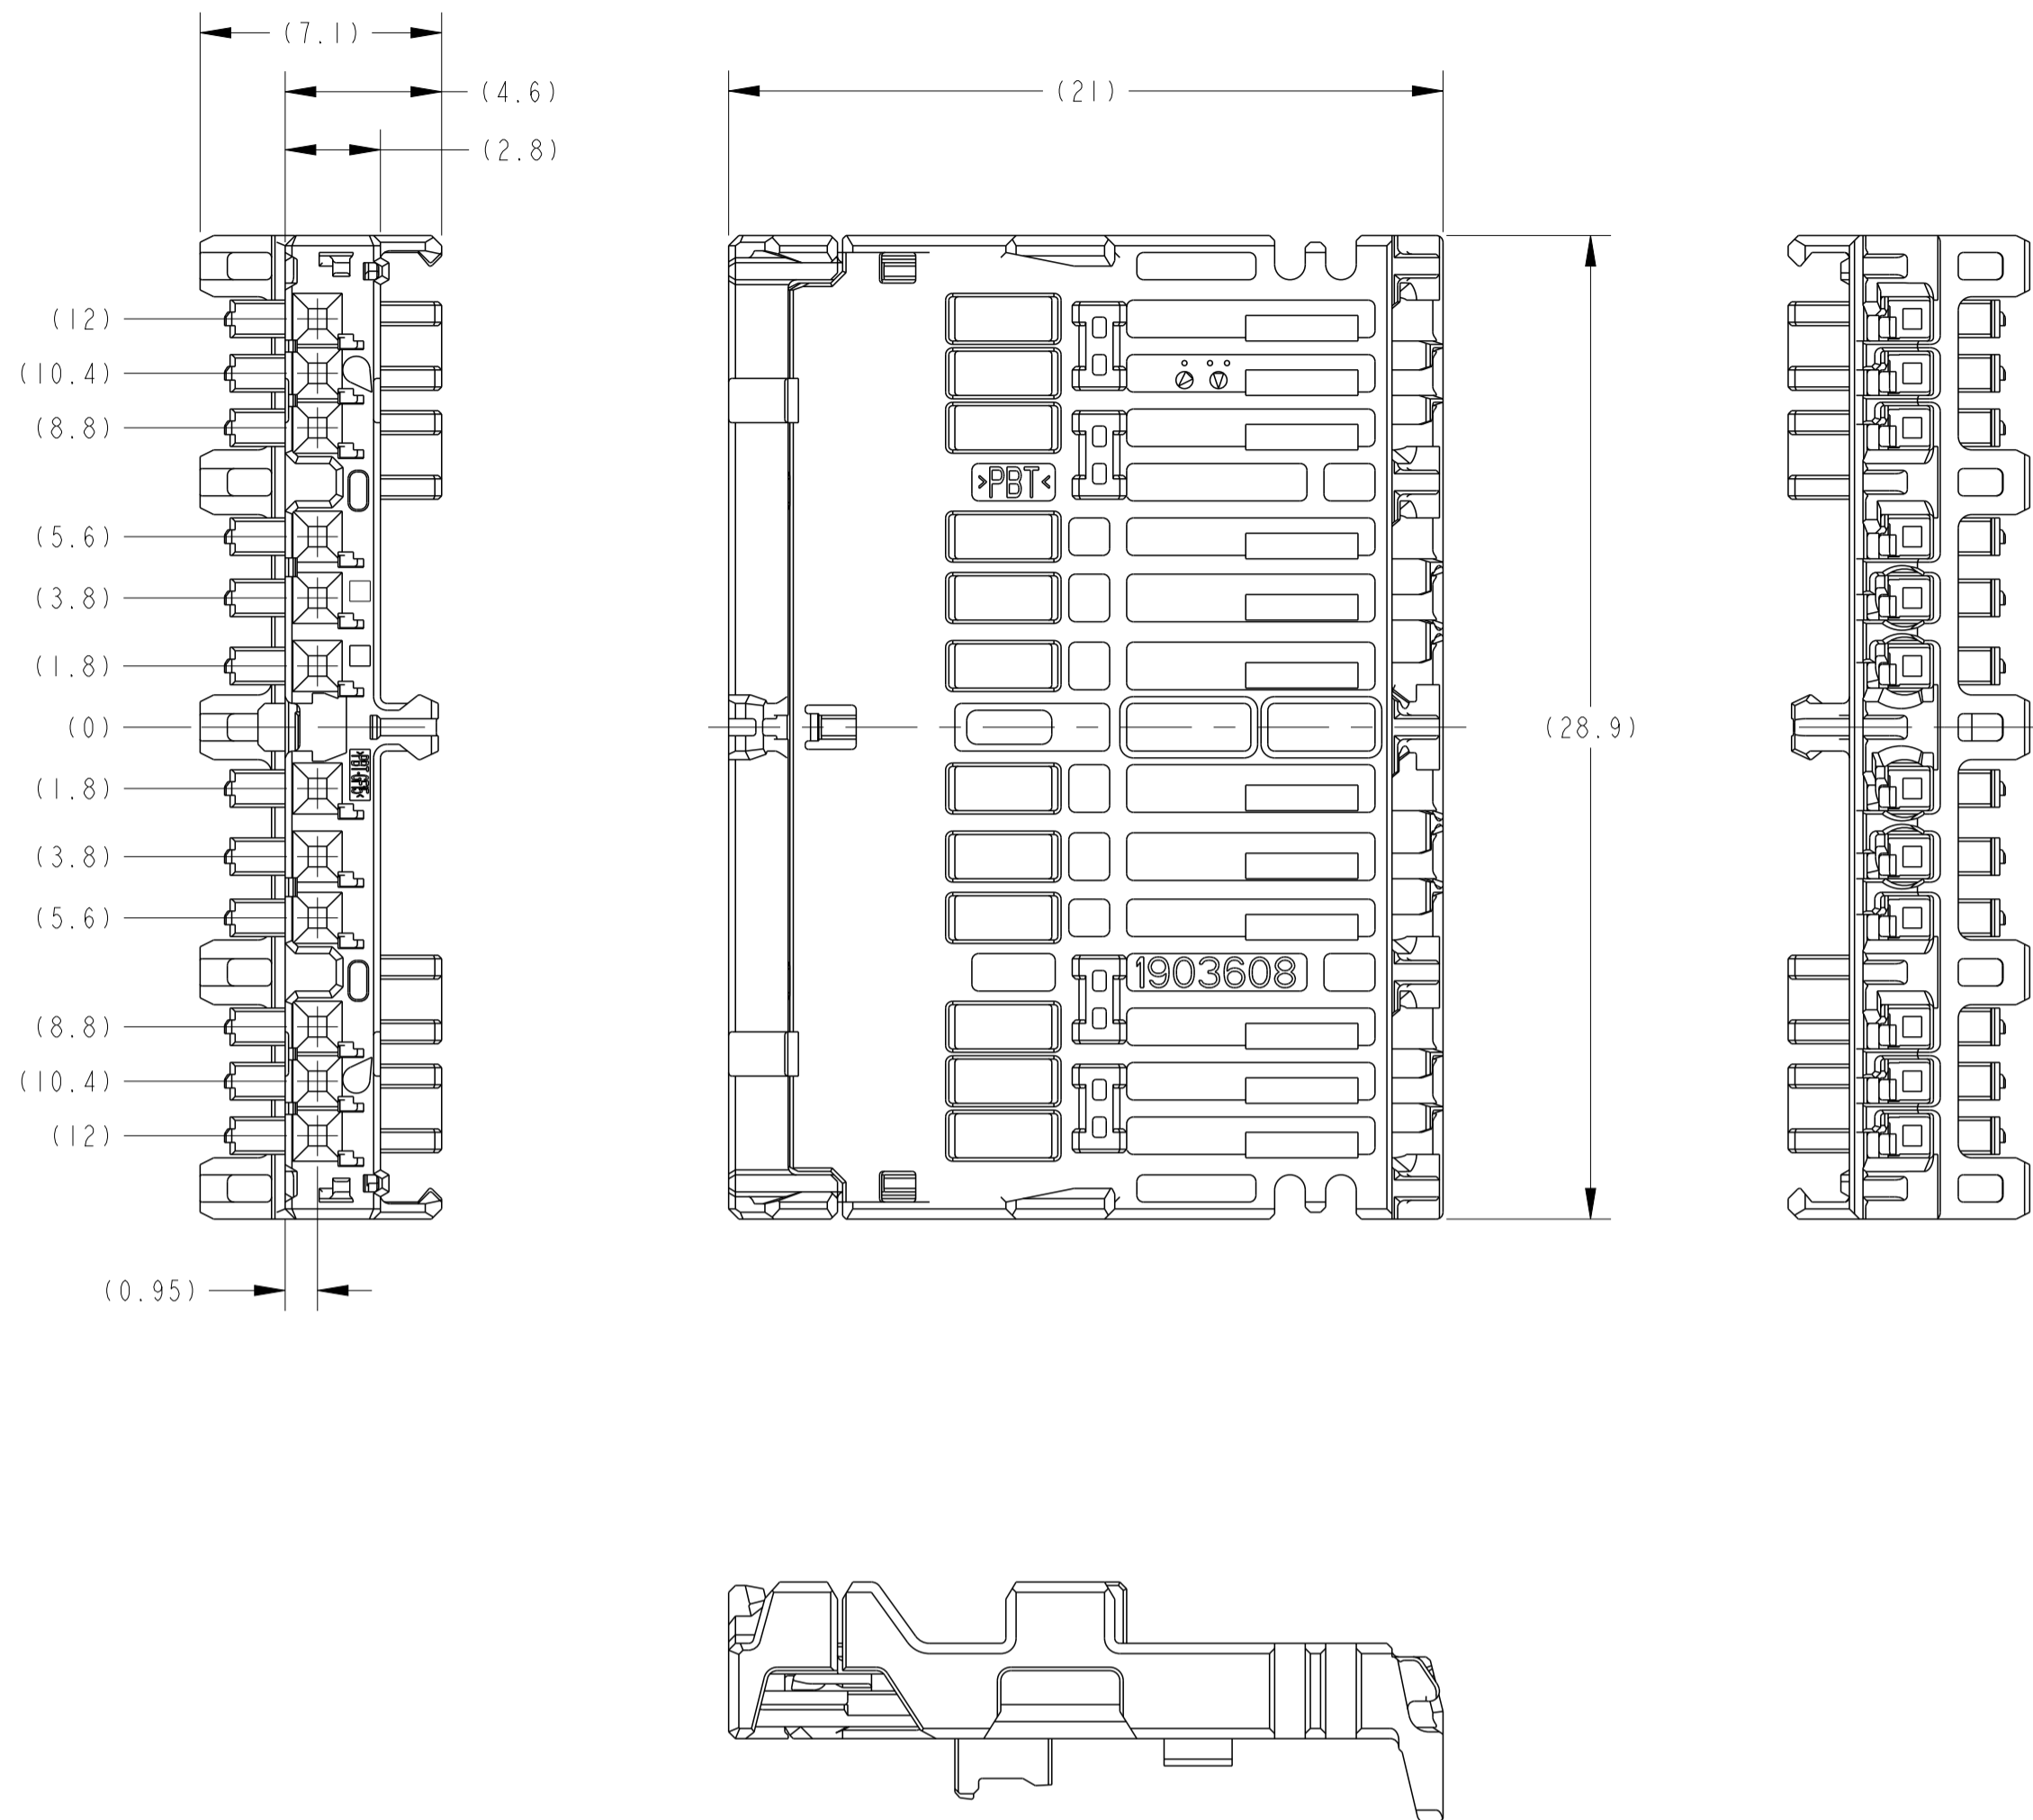



1. 本製品は、別添のコンポーネントと組合せて使用する。
2. 取扱説明書 NO: 411-78268
3. 組合せ相手型番: 取扱説明書を参照のこと。
4. 嵌合相手代表型番: 取扱説明書を参照のこと。
5. 適用端子: TABLE - I 参照

1. THIS PRODUCT IS USED STACK WITH ANOTHER COMPONENTS.
2. HANDLING OF THIS PART SHOULD FOLLOW INSTRUCTION SHEET NO.411-78268.
3. COMPONENTS NUMBER OF STACKING;REFERENCE TO INSTRUCTION SHEET.
4. MATING CONNECTOR PART(TYPICAL);REFERENCE TO INSTRUCTION SHEET.
5. APPLIED TERMINAL;SEE TABLE-1

TABLE - I

| | | APPLIED TERMINAL P/N 適用端子 P/N | APPLICABLE WIRE RANGE 適用電線 |
|---------------|------|----------------------------------|-------------------------------|
| SIGNAL 0.5 | TIN | 1827855-4 | 0.13~0.5mm ² |
| | TIN | 1827855-1 | |
| | GOLD | 1903703-1 | |
| | TIN | 1827855-2 | |
| | TIN | 1827855-3 | |

| | | | | | |
|---------------------|------------------------|---------------|------------------------|-------|----------|
| PAPER BOX ダンボール箱 | SOFT TRAY プラスチックトレイ | GRAY | 1-1903608-8 | COLOR | PART NO. |
| | | | 1-1903608-7 | | |
| | | | 1-1903608-6 | | |
| | | | 1-1903608-5 | | |
| | | | 1-1903608-4 | | |
| | | ⑥ 1-1903608-3 | | | |
| | | BLACK | ⑥ 2-1903608-6 | | |
| | | | 1-1903608-2 | | |
| | | | 1-1903608-1 | | |
| | | | 1-1903608-0 | | |
| | | | 1903608-9 | | |
| | | | 1903608-8 | | |
| | | | 1903608-7 | | |
| | | NATURAL | 2-1903608-5 | | |
| | | | 1903608-6 | | |
| | | | 1903608-5 | | |
| | | | 1903608-4 | | |
| | | | 1903608-3 | | |
| 1903608-2 | | | | | |
| 1903608-1 | | | | | |
| OUTER 外装 | INNER 内装 | | | | |
| PACKING STYLE 梱包形態 | | | | | |

| | | | | | |
|---------------------------------------------------------------------------------------|--|------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|-------------------------------------------------------------------------------------------------------|--|
| THIS DRAWING IS A CONTROLLED DOCUMENT. | | DWN K. KATO 09DEC08 CHK R. KOMIYAMA 09DEC08 APP'D H. YAMAGAMI 09DEC08 | |  TE Connectivity | |
| DIMENSIONS: mm RE | | TOLERANCES UNLESS OTHERWISE SPECIFIED: mm ± 0.3 0-P-LC ± 0.5 0-P-LC ± 0.5 0-P-LC ± 0.13 0-P-LC ± 0.04 0-P-LC ± 0.04 ANGLES FINISH SEE TABLE | | NAME 0.5 12POSITION HOUSING ASSY STACKING TYPE | |
|  | | PRODUCT SPEC 108-78437 APPLICATION SPEC 108-78437 | | SIZE CAGE CODE DRAWING NO A1 00779 C=1903608 | |
| MATERIAL REF1 PBT | | WEIGHT 1.25 g | | RESTRICTED TO - | |
| | | CUSTOMER DRAWING | | SCALE 5:1 SHEET 1 OF 1 REV B | |