

REV. A


DCO 144162

COIL: @ 25°C
 RESISTANCE 550 OHMS MAX.
 NOMINAL VOLTAGE 26.5 VDC
 MUST OPERATE 13.5 VDC
 MUST RELEASE 7.0 VDC MAX, 1.5 VDC MIN.

ENVIRONMENT:
 VIBRATION 10 Hz TO 2000 Hz @ 20 g's
 SHOCK 50 g's 11 MS. DURATION
 TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE 6 MS MAX.
 RELEASE 5 MS MAX. BOUNCE 2.5 MS

CUSTOMER DATA SHEET

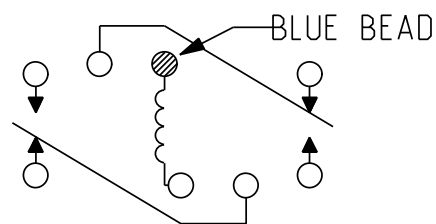

TERMINAL VIEW

CONTACT RATING:
 2 AMPS 28 VDC 1 AMP 115 VAC
 (CASE NOT GROUNDED)
 RESISTIVE 100,000 OPERATIONS

DR. PBB 2/22/01 CK. 3/8/06 J.M.B.

tyco
Electronics

©COPYRIGHT 2005
 TYCO ELECTRONICS CORPORATION
 ALL INTERNATIONAL RIGHTS RESERVED

CUST. CII STD
 CUST. NO. REV.

TYCO NUMBER

CII PART NUMBER

3SAE5111K1