

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
AI	00						
			C	ECR-15-011726	06AUG15	LS	GS

# HT11K HAND TOOL, MCON 050

## FRONT VIEW



## SIDE VIEW



## Eigenschaften / Features

Die Handzange verfügt über eine verschiebbare Crimpmatrize mit insgesamt sechs Crimpnester in denen die Leitungsquerschnitte 0.13, 0.17, 0.22, 0.22 (RF\*), 0.35 (FLR) und 0.35 mm<sup>2</sup> (FLU) verarbeitet werden können. Die Kontakte werden mittels Klapppositionierer in der richtigen Ausgangsposition gehalten.

Hand tool with slideable crimping die set on which six crimping nests cover the wire sizes 0.13, 0.17, 0.22, 0.22 (RF), 0.35 (FLR) and 0.35 sq.mm (FLU). Featured with a flap contact locator to allow correct positionint of the applied terminals.

RF\*=Reinforced/Zugverstärkt

## Abmessungen / Dimensions:

Länge / Length: 235 mm

Breite / Width: 64 mm


Tiefe/Depth : 31 mm

## Anwendungsbereich / Application range



TYPE MCON 0.50

- Application Specification 114-94191

## Matrize / Die set:

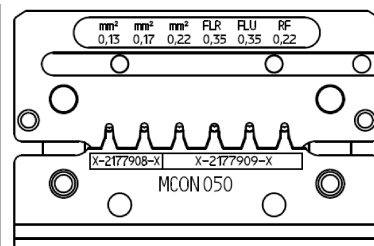

**Betriebsanleitung /  
CUSTOMER MANUAL:**  
IS 411-18539 / TE PN 6-744015-4

DIMENSIONS:		DWN C. Witt	21N02013	MATERIAL		FINISH	
mm		CHK C. Witt	21N02013	<div>TE Connectivity</div>			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD C. Witt	21N02013				
0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± -		PRODUCT SPEC		NAME HT11K HAND TOOL MCON050, 0.13-0.35 SQ.MM			
		APPLICATION SPEC		HT11K Handzange MCON050, 0.13-0.35 qmm			
		SIZE	CAGE CODE	DRAWING NO		RESTRICTED TO	
		WEIGHT 0.456kg		A4	00779	C-4-1579014-1	
		CUSTOMER DRAWING			SCALE	SHEET 1 OF 1	REV C