
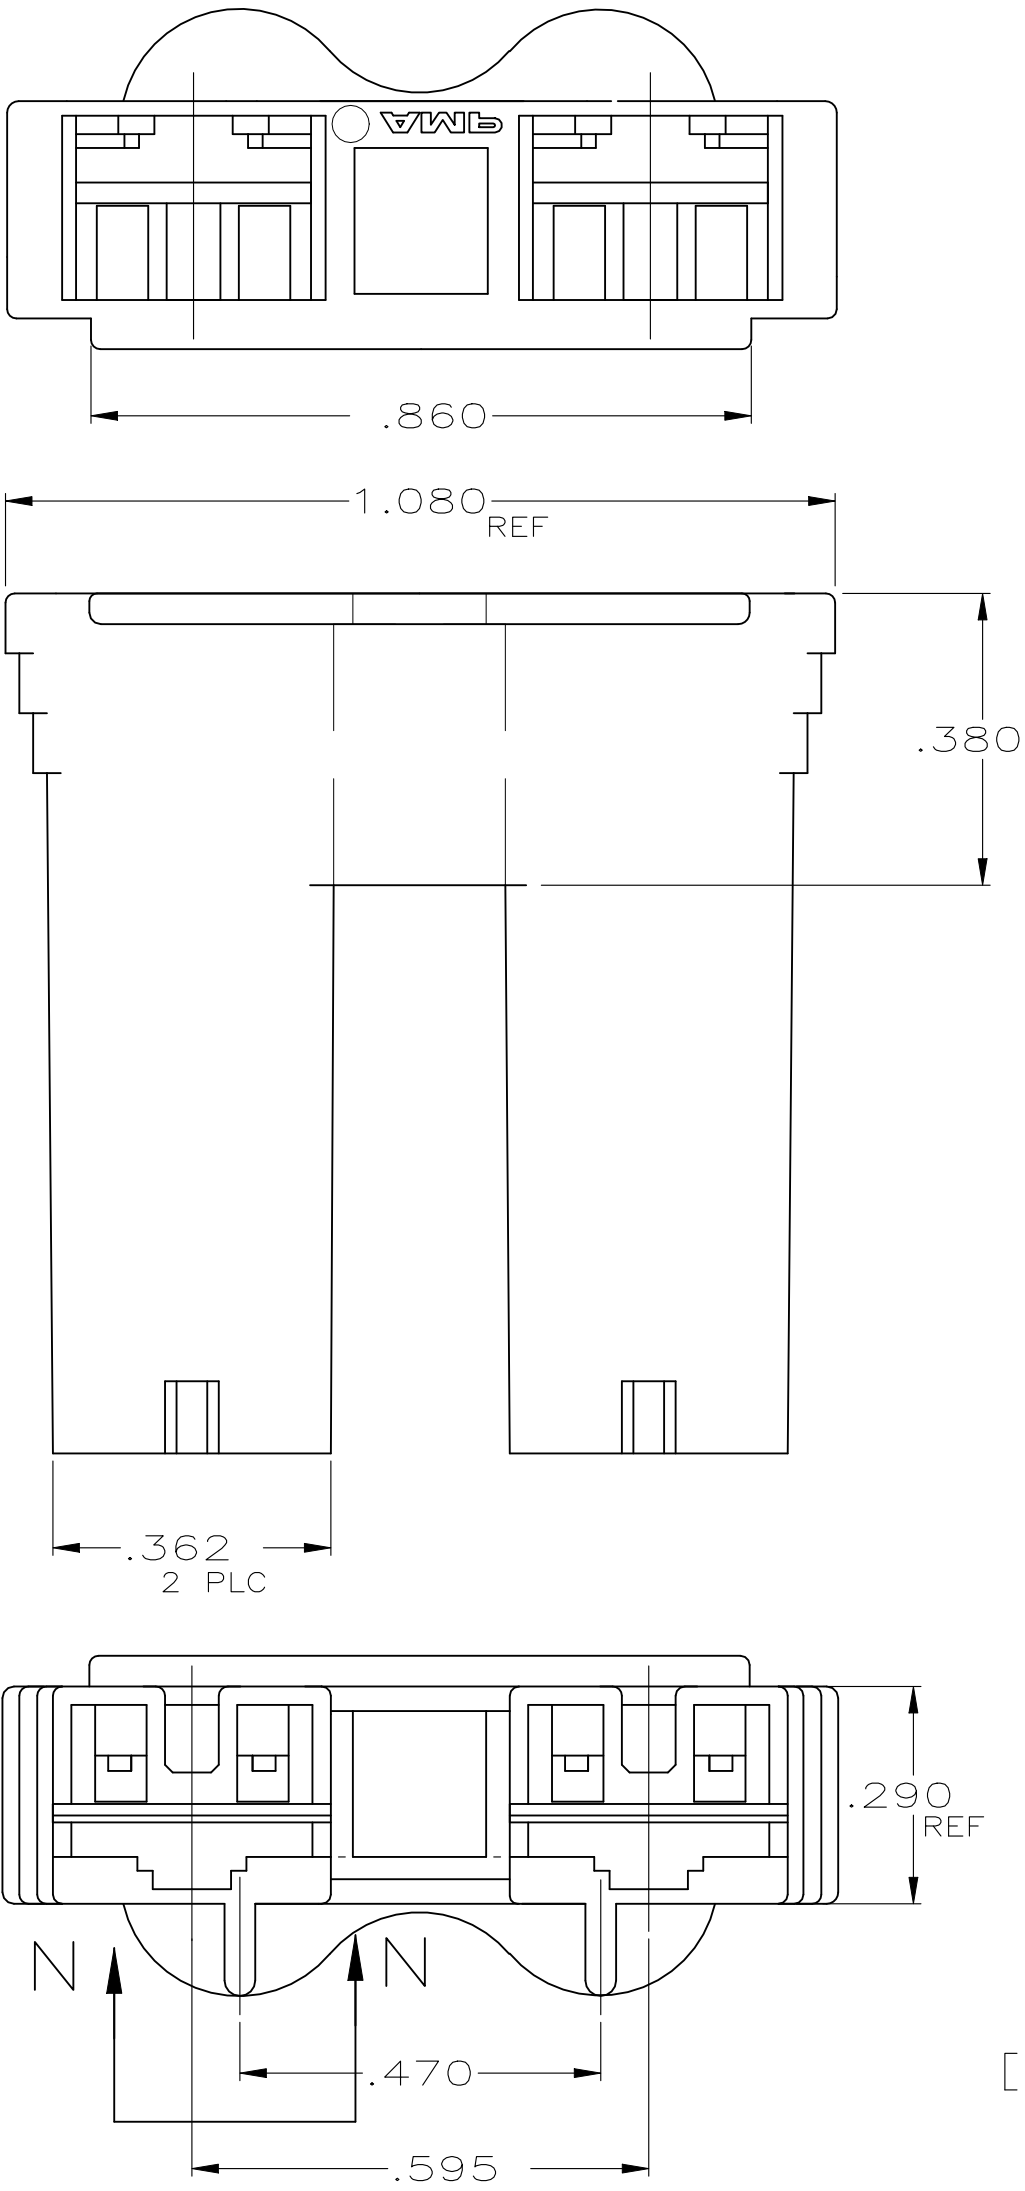



REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	V	REVISED PER ECR-23-173364	25MAY2023	SS	AF





- 1 GLOW WIRE APPROVED; CONTACT TE ENGINEERING FOR SPECIFICATION
- 2 ALL WALL THICKNESSES ARE BETWEEN .016 INCH (0.4MM) AND .118 INCH (3.0MM)

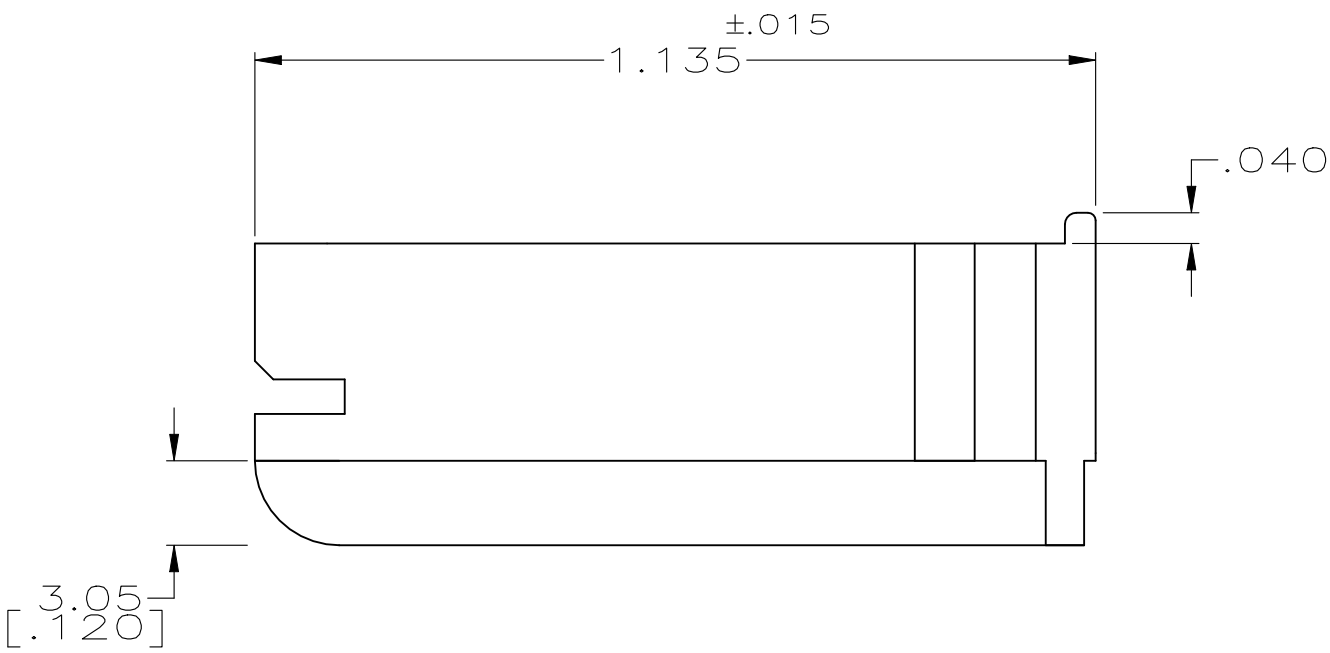

	RED	66 NYLON V0, GWT RED	2-521229-2
	NATURAL	66 NYLON V0, GWT NATURAL	2-521229-1
1	RED	NYLON 6, UL94-V2	1-521229-2
1	NATURAL	NYLON 6, UL94-V2	1-521229-1
	RED	NYLON 66/6, UL94-V0	521229-2
	NATURAL	NYLON 66/6, UL94-V0	521229-1
NOTES	COLOR	MATERIAL	PART NO

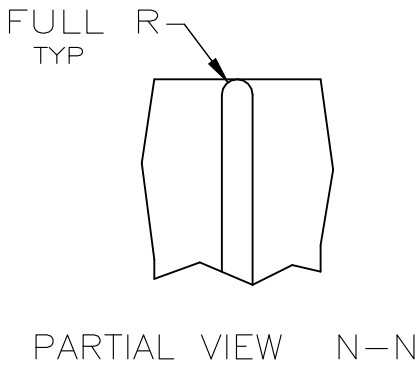

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN JR RUTH 05NOV99		 TE Connectivity			
DIMENSIONS: INCHES		CHK M FEHER 05NOV99					
		APVD D BRATINA 05NOV99		NAME HOUSING, RECEPTACLE, FASTON, POSITIVE-LOCK MK II, .250 SERIES —			
		PRODUCT SPEC —					
		APPLICATION SPEC 114-2074					
		WEIGHT —					
MATERIAL SEE TABLE		FINISH SEE TABLE		SIZE A2	CAGE CODE 00779	DRAWING NO C=521229	RESTRICTED TO —
CUSTOMER DRAWING				SCALE 4:1	SHEET 1 of 1	REV V	