

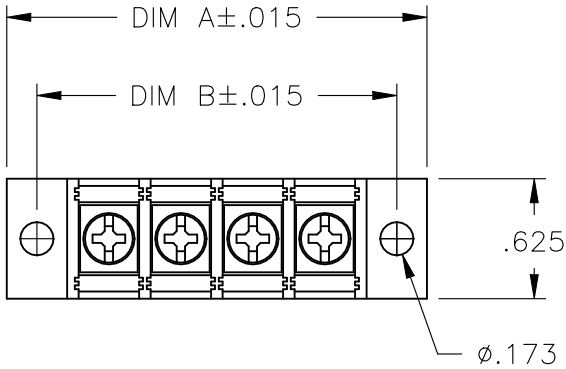


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	B7	LOWER OPERATING TEMP ADDED	23JUL21	GMN	PS

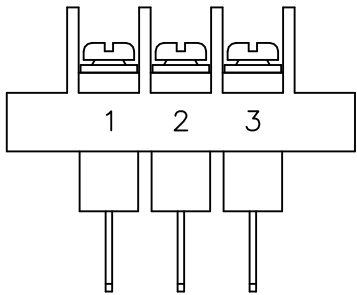


PHYSICAL PROPERTIES:  
HOUSING: THERMOPLASTIC, UL94V-0, BLACK.  
TERMINALS: MATERIAL: COPPER ALLOY, PLATING SEE TABLE.  
SCREWS: #6-32 STEEL, ZINC PLATING W/ CLEAR CHROMATE.  
PITCH (TERMINAL SPACING): .375"  
OPERATING TEMP: -40° C to 105° C MAX


ELECTRICAL PROPERTIES:  
RATED CURRENT: 20A  
OPERATING VOLTAGE: 300V  
WIRE RANGE: 12-22 AWG

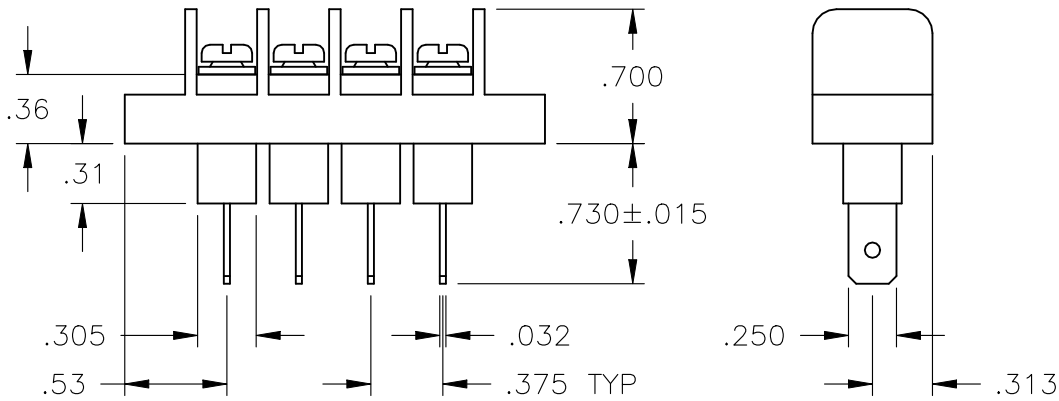

2-796985-2

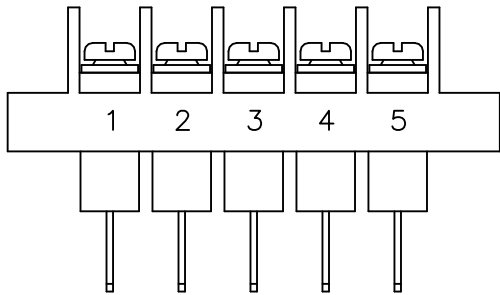


2-796985-4

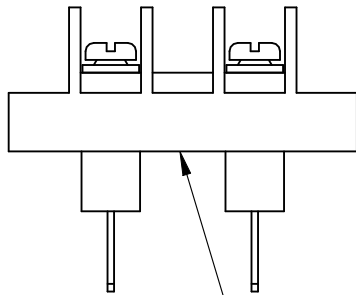



2-796985-3

CUT TURRET OFF  
FLUSH WITH BOTTOM  
OF HOUSING

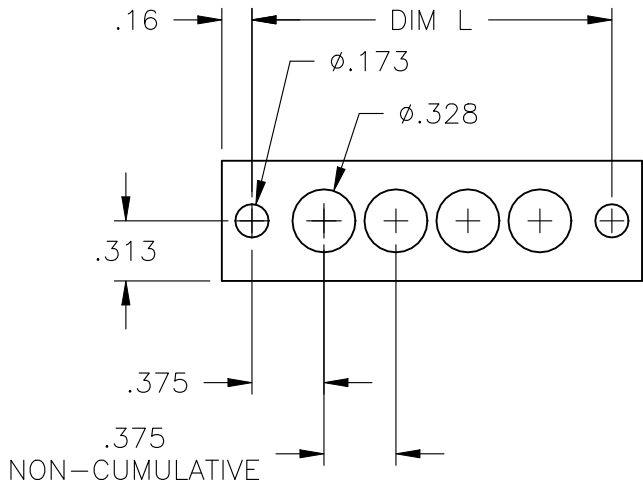


MOUNTING PANEL LAYOUT

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S SCHLEGEL 5/27/03	 TE Connectivity Ltd.				
		CHK S YODER 5/27/03					
DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD S YODER 5/27/03	NAME  JC6-Q308-XX ASSEMBLY				
	0 PLC ± - 1 PLC ± - 2 PLC ± .02 3 PLC ± .010 4 PLC ± - ANGLES ± -	PRODUCT SPEC —					
MATERIAL —	FINISH —	APPLICATION SPEC —	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO	
		WEIGHT —	A3	00779	C-6-1437665-2	—	
		CUSTOMER DRAWING					SCALE NTS

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET 1	-	-	-

BRIGHT TIN PL	9.000	9.314	23	JC6-Q308-23	2-1546700-2		
BRIGHT TIN PL	8.625	8.939	22	JC6-Q308-22	2-1546700-1		
BRIGHT TIN PL	8.250	8.564	21	JC6-Q308-21	2-1546700-0		
BRIGHT TIN PL	7.875	8.189	20	JC6-Q308-20	1-1546700-9		
BRIGHT TIN PL	7.500	7.814	19	JC6-Q308-19	1-1546700-8		
BRIGHT TIN PL	7.125	7.439	18	JC6-Q308-18	1-1546700-7		
BRIGHT TIN PL	6.750	7.064	17	JC6-Q308-17	1-1546700-6		
BRIGHT TIN PL	6.375	6.689	16	JC6-Q308-16	1-1546700-5		
BRIGHT TIN PL	6.000	6.314	15	JC6-Q308-15	1-1546700-4		
BRIGHT TIN PL	5.625	5.939	14	JC6-Q308-14	1-1546700-3		
BRIGHT TIN PL	5.250	5.564	13	JC6-Q308-13	1-1546700-2		
BRIGHT TIN PL	4.875	5.189	12	JC6-Q308-12	796985-9		
BRIGHT TIN PL	4.500	4.814	11	JC6-Q308-11	1-1546700-1		
BRIGHT TIN PL	4.125	4.439	10	JC6-Q308-10	796985-6		
BRIGHT TIN PL	3.750	4.064	9	JC6-Q308-09	1-1546700-0		
BRIGHT TIN PL	3.375	3.689	8	JC6-Q308-08	6-1437665-9		
BRIGHT TIN PL	3.000	3.314	7	JC6-Q308-07	6-1437665-8		
BRIGHT TIN PL	2.625	2.939	6	JC6-Q308-06	6-1437665-7		
<div>3</div> OBSOLETE	BRIGHT TIN PL	2.250	2.564	5	JC6-Q308-05-175	<del>2-796985-4</del>	
SEE FIGURE (PAGE 1)	BRIGHT TIN PL	2.250	2.564	5	JC6-Q308-05	6-1437665-6	
	<div>2</div>	1.875	2.189	4	JC6-Q308-04	6-1546700-5	
	BRIGHT TIN PL	1.875	2.189	4	JC6-Q308-04	6-1437665-5	
SEE FIGURE (PAGE 1)	BRIGHT TIN PL	1.500	1.814	3	JC6-Q308-03-174	<del>2-796985-3</del>	
SEE FIGURE (PAGE 1)	<div>3</div> OBSOLETE	BRIGHT TIN PL	1.500	1.814	3	JC6-Q308-03-173	<del>2-796985-2</del>
	BRIGHT TIN PL	1.500	1.814	3	JC6-Q308-03	6-1437665-4	
	BRIGHT TIN PL	1.125	1.439	2	JC6-Q308-02	6-1437665-2	
	PLATING	DIM. B	DIM. A	NO. OF POS.	CATALOG NUMBER	PART NO.	

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S SCHLEGEL 5/27/03	<div>STE</div> TE Connectivity Ltd.			
		CHK S YODER 5/27/03				
DIMENSIONS: INCHES		APVD S YODER 5/27/03	NAME			
	0 PLC ± -	PRODUCT SPEC	JC6-Q308-XX ASSEMBLY			
	1 PLC ± -	APPLICATION SPEC				
	2 PLC ± .02	—	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
	3 PLC ± .010	—	A300779C-6-1437665-2			—
	4 PLC ± -	WEIGHT —	SCALE NTS SHEET 2 OF 3 REV B7			
	ANGLES ± -	CUSTOMER DRAWING				
MATERIAL —	FINISH —					

- 1

PRELIMINARY
- 2

MATTE TIN PLATE .0002 - .0006 MIN OVER .00005 MIN NICKEL.
- 3

OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI
- 4

INSULATION RESISTANCE >2000M Ω (500V DC)