


Unit : mm

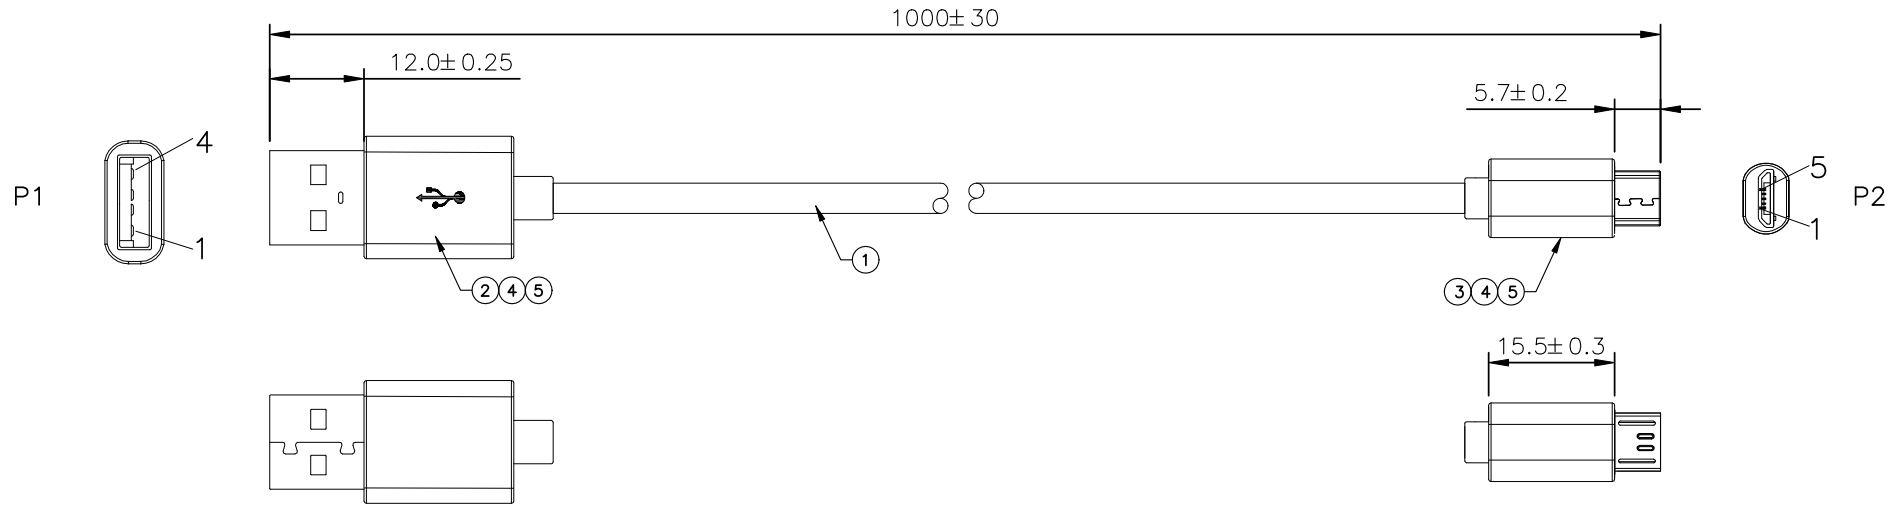

Electrical characteristics requirements:

- 1) Product must be 100% conduction, open circuit, short circuit test
- 2) conductive resistance: 2Ω MAX
- 3) Insulation resistance: 10MΩ MIN DC 300V/0.01S
- 4) There is no scratch, crush, foreign body and other defects in the appearance
- 5) Products conform to the latest ROHS standard

RoHS Compliant

PIN ASSIGNMENT			MATERIAL SPECIFICATION					Q'TY		OVERALL WIRE LENGTH
ITEM	PART No.	VENDOR	DESCRIPTION					Q'TY	OVERALL WIRE LENGTH	
5	OVERMOLD	-	PVC BLACK 45P 非阻燃 ROHS+REACH					-	-	
4	INNERMOLD	-	PP 透明 ROHS+REACH					-	-	
3	CONN	-	USB2.0 MICRO USB BLACK G/F 铁壳镀镍 ROHS+REACH					1	-	
2		-	USB2.0 A/M 一体式 BLACK胶芯 G/F 铁壳镀镍 ROHS+REACH					1	-	
1	CABLE	-	NO-UL,#30*1P+#26*2C+A+E BLACK PVC OD:3.5MM VW-1 ROHS+REACH					1	1000	
1	RED	1								
2	WHITE	2								
3	GREEN	3								
4	BLACK	5								
SHELL	DRAIN	SHELL								
P1	COLOR	P2								
△3			DRAWN BY	CHECKED BY	APPROVED BY	CONFIRMED BY	DESCRIPTION		CUST. CODE	
△2			Lulu	Iron	Iron	Waleed	USB CABLE		CUC	
△1			06/19.20'	06/19.20'	06/19.20'	06/19.20'	瀚荃股份有限公司 CviLux Corporation		CUSTOMER P/N	
SYM	NAME	DATE	REVISIONS				SHEET: 1 OF 1	DH50563A	DH-20M50055	-