


MICRO COAX Cable with IPEX Cabline-SS

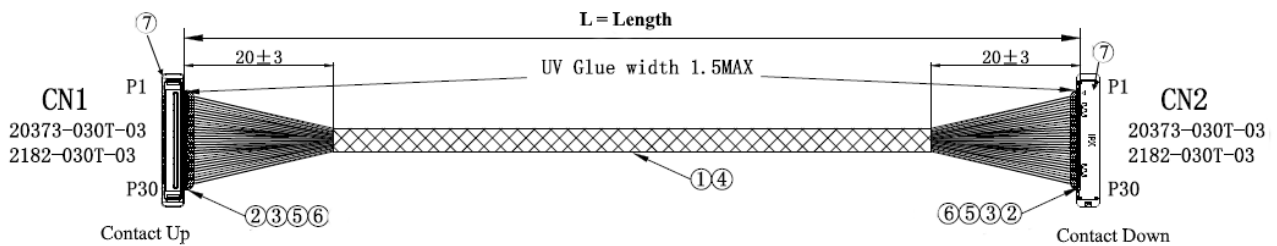

Drawing (only for reference) shows round binding with acetate cloth tape

1 wire – micro coax (Possible AWG: #38 #40 #42 #44 #46)	AWG 40/ 50Ω green UL11130
2 connector IpeX Cabline CAII – 0.4 pitch / (10-50 Pos.)	Plug: 20373-R**T-03; ;Metal Cover: 2182-0**T-03; (Receptacle 20374-R**E-31)
3 Kapton	Kapton
4 Binding	Round binding with acetate cloth - E304309 >800mm Partial Round Binding
5 Ground Bar	WG/B-002DA
6 UV Glue	HD1232
7 Laser marking	Aix CSS YY.MM
Transfer rate	Up to 8.1 Gbps (reference only)
Operation temperature / rating voltage	-40 °C bis 85 °C / 100V (per contact)

All materials are RoHS / REACH compliant with UL File numbers from ISO certified suppliers.



How to Order

CSS – nn – LLL – ii – B C C=Connection
 1=Connection 1:1
 N=Connection 1:N
 X-000N customer specific

B=Binding
 0=(null) w/o Binding
R=Round with Acetate Cloth
 P= Partial Round Binding
 F=Flat with Acetate Cloth
 S=Spiral
 L=Laminated

ii=Impedance e.g. 50Ω

LLL=Length in mm optional

nn=No. of Position

CSS=Series Name: IPEX Cabline-SS

For Example: CSS-30-200-50-R1
 (Cable IPEX Cabline SS 30-30 Pos. TL250mm 50 Ohm AWG40 Round Binding connection 1:1)

MICRO COAX Cable with IPEX Cabline-SS

For Custom Solution fill in this Form

*1 Use Supplier Pin Count

*2 Choose: MC = Micro Coaxial or TC = Twin Coaxial or DW = Discrete Wire

*3 Depending on Connector Specification – make sure wires of the same type are together

Total Length:

	<- CN1	Partnumber	CN2 ->	
CN1	Wire	AWG	Impedance	CN2
Pin	Type		1/Ohm	Pin
*1	*2	*3		
1				
2				
3				
4				
5				
6				
7				
8				
9				
10				
11				
12				
13				
14				
15				
16				
17				
18				
19				
20				
21				
22				
23				
24				
24				
25				
26				
27				
28				
29				
30				
31				
32				
33				
34				
35				
36				
37				
38				
39				
40				