




Technical data sheet

SER2USB

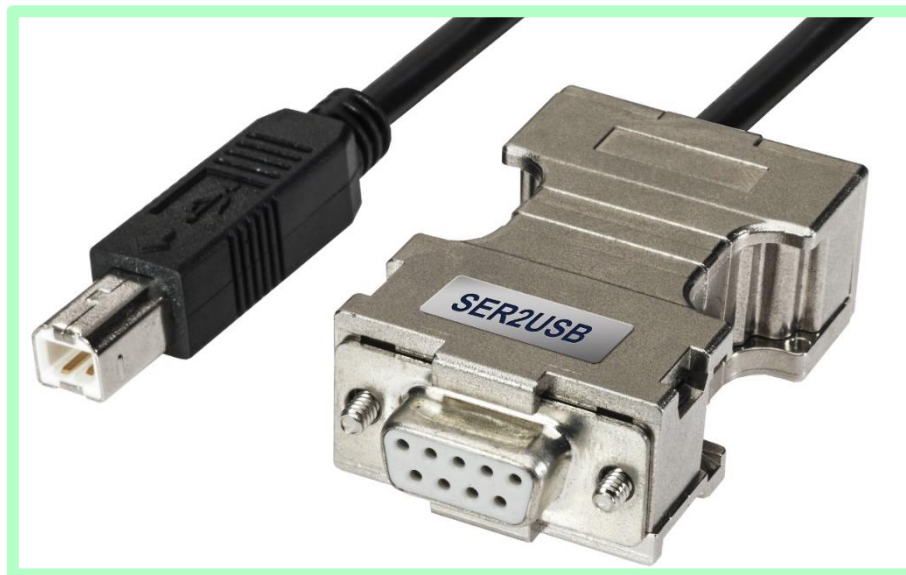

SER2USB

Adapter to connect printers and multifunction printers with an USB connection to the COM interface of PCs, measuring devices, laboratory and diagnostic devices, control panels, medical devices as well as all other products with a serial interface.

Supported Features

Only printing.

Scanning, PC-Fax, and Software - Toolboxes are not supported

GDI - Printer (without own emulation) are not supported.

Supported systems

All systems. No drivers or software are required.

Technical Data

Power supply

Input: 100-240V / 50/60Hz
Output: 5Volt / about 100 mA
Cable: about 1.8m

Serial interface

Speed: 2400 – 115200 Baud
Protocol: None,RTS/CTS
XON/XOFF
Parity: None,Odd,Even
Databits: 7,8
Stopbits 1,2
Jack: 9-pole SUB-D


USB interface

USB USB1.0 Low-Speed
USB1.1 Low/ Full-Speed
USB2.0 Low / Full-Speed

Class: Printer
Class: HUB

Plug: USB - B
Cable: about 1.8m

Speed: Low-Speed 1.5 MBit/sec
Full-Speed 12 MBit/sec

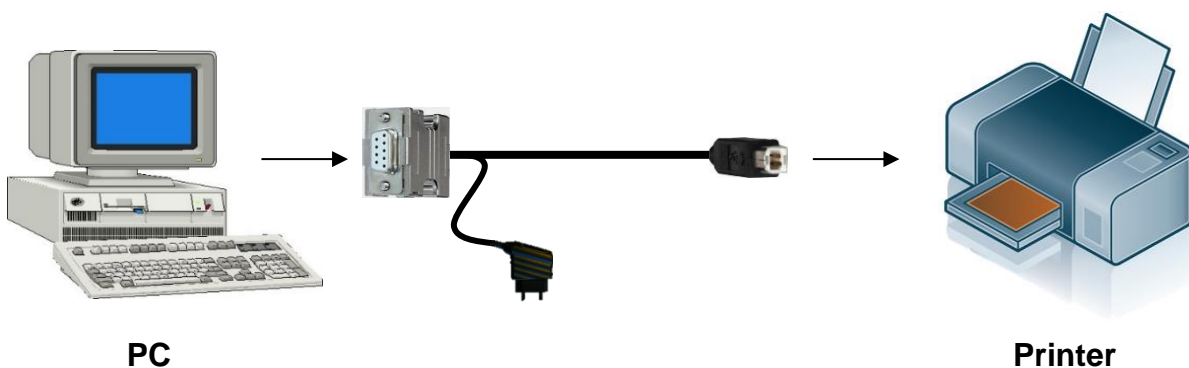

PC

Printer

Hardware – Description



Printer



**parallel
Interface**

Power supply and Adapters

