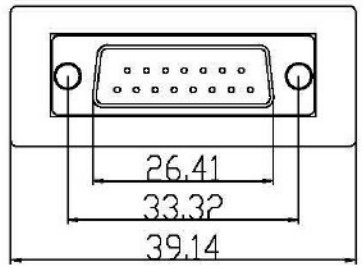

Male



Female

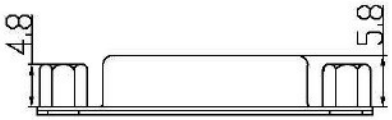

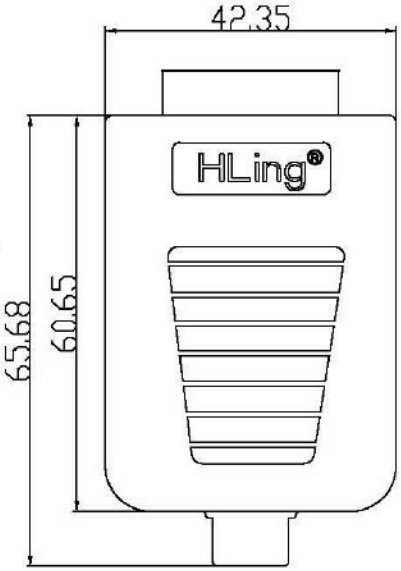

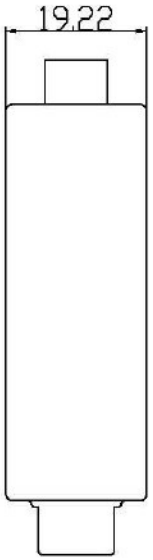

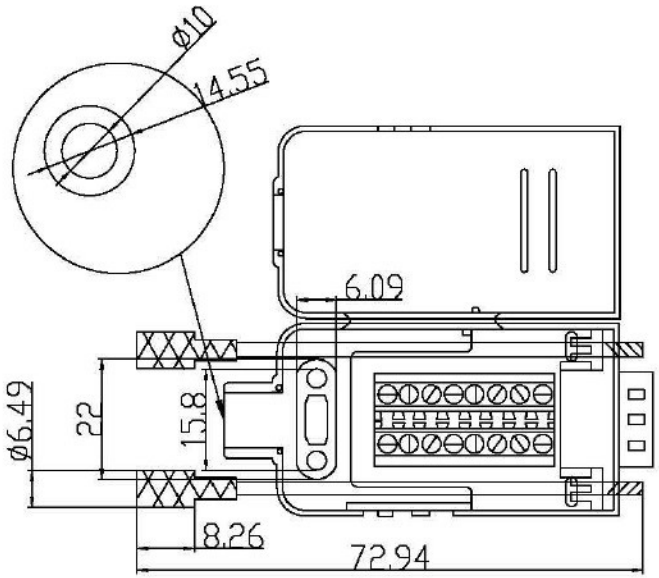



1. Features:
Rated voltage: 220V
Rated current: up to 1A
Contact resistance: 30mΩ MAX
Insulation resistance: 3000mΩMIN. At 500V DC
Withstand voltage: 220V AC RMS for 1Minute
Temperature range: -45°C - +85°C
2. Materials:
Plug rubber core: PBT
Plug terminal: brass core with black rubber core, tin-plated outside
Plug iron shell: SPCC, nickel-plated front shell
Shell: new PP
Terminal: 3.81 copper block green terminal
Screw: nickel-plated iron 2.3MM* 72.94MM X 2PCS
Circuit board: lead-free environmental protection green board
Tail outlet: 10.0MM

CompuCableUSA

	Difference	0.5
	Unit	mm
	Ratio	1:1
Part No.	DTB-15MP-KIT (Male) DTB-15FP-KIT (Female)	