


1	2	3	4	5	6	7	8
---	---	---	---	---	---	---	---

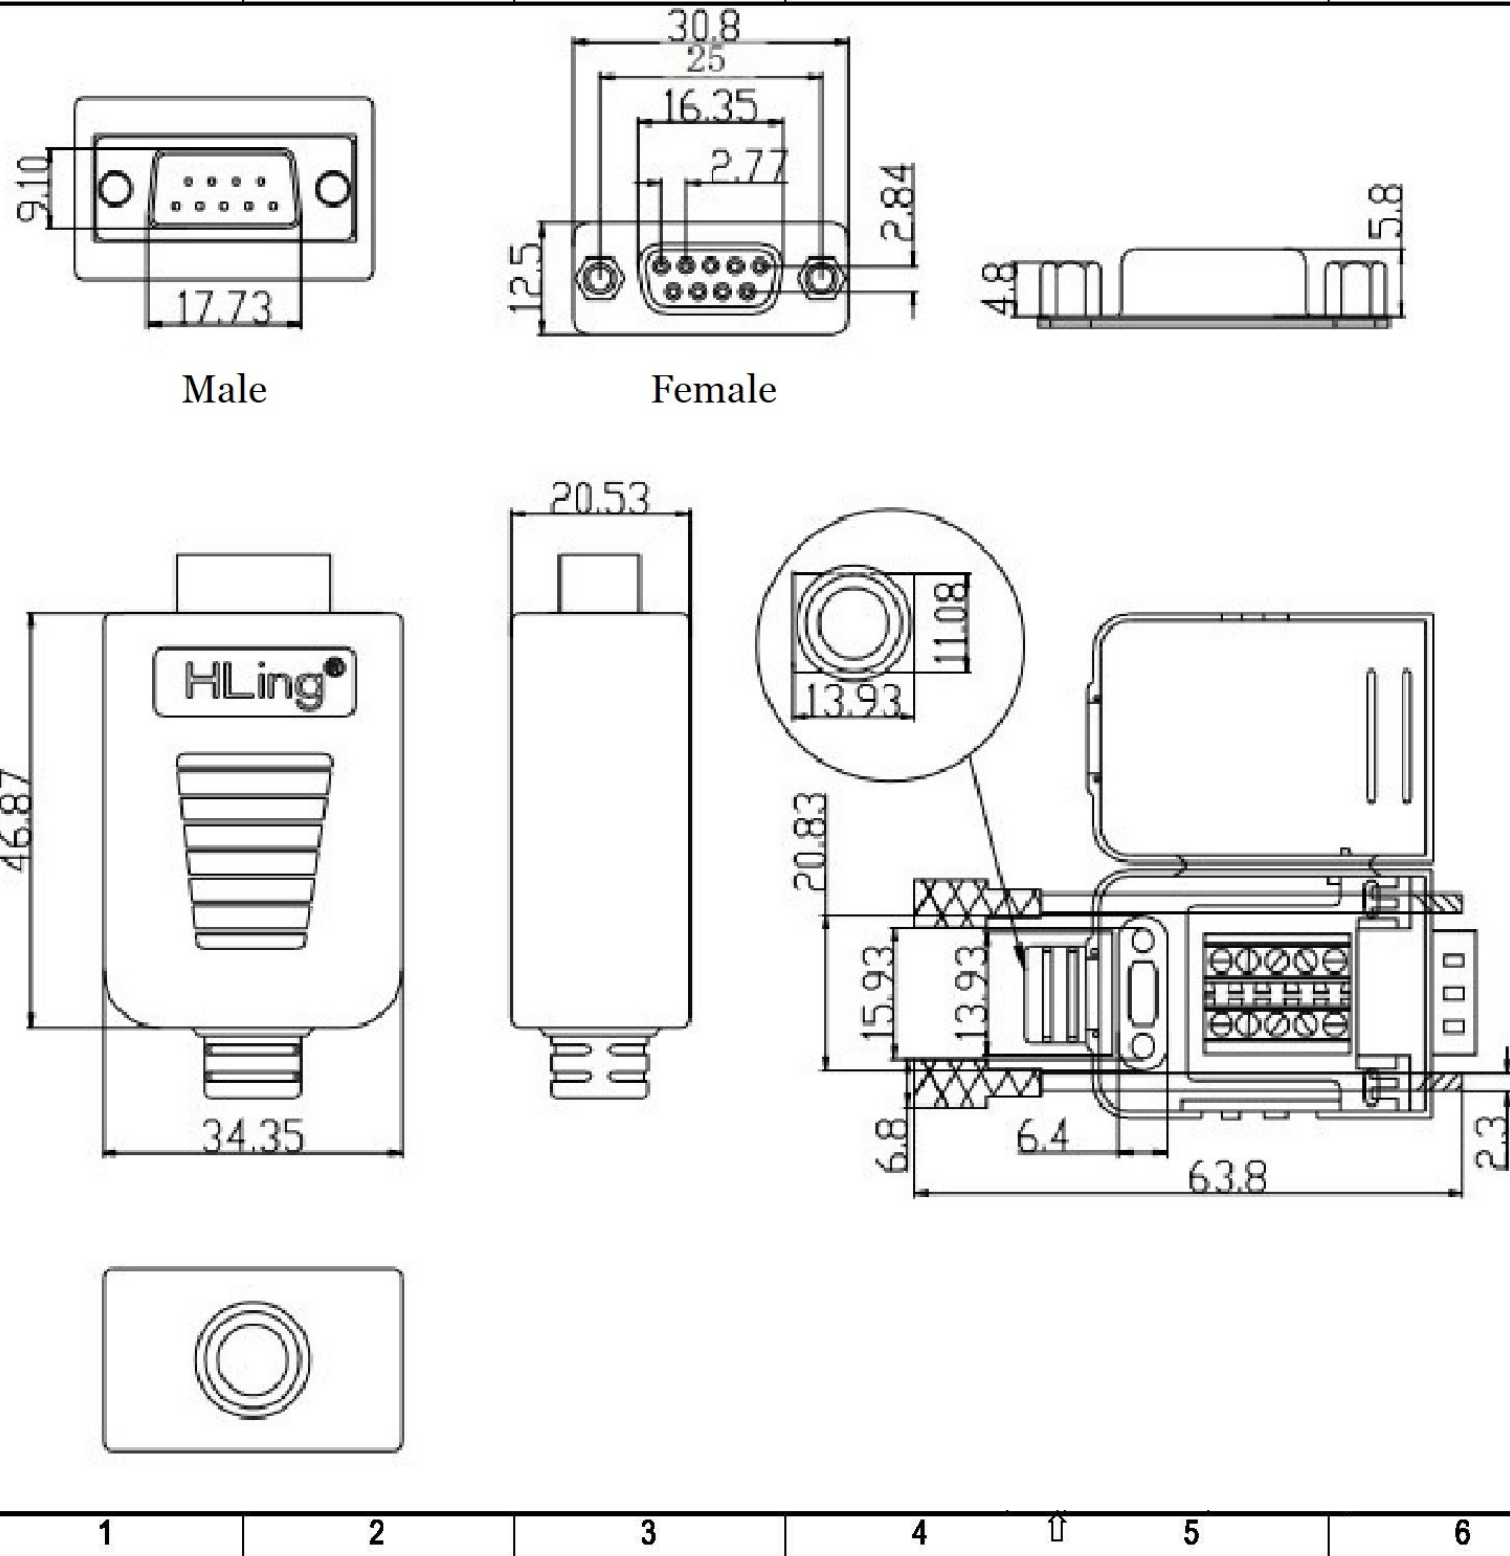

- Features:
Rated voltage: 220V
Rated current: up to 1A
Contact resistance: 30mΩ MAX
Insulation resistance: 3000mΩMIN.
At 500V DC
Withstand voltage: 220V AC RMS
for 1Minute
Temperature range: -45°C - +85°C
- Materials:
Plug rubber core: PBT
Plug terminal: brass core with black
rubber core, tin-plated outside
Plug iron shell: SPCC, nickel-plated
front shell
Shell: new PP
Terminal: 3.81 copper block green
terminal
Screw: nickel-plated iron 2.3MM*
72.94MM X 2PCS
Circuit board: lead-free
environmental protection green
board
Tail outlet: 10.0MM

CompuCable ⁺ USA		
	Difference	0.5
	Unit	mm
	Ratio	1:1
Part No.	DTB-9MP-KIT (Male) DTB-9FP-KIT (Female)	

1	2	3	4	5	6	7	8
---	---	---	---	---	---	---	---