

**Driver LCO 75W 350/700/1050/1560/1790/2080mA 0-10V C ADV UNV**

OUTDOOR advanced series

**Product description**

- \_ Constant current LED driver
- \_ Only for US applications
- \_ Dimmable via 0 ... 10 V interface
- \_ Dimming range 10 to 100 %
- \_ UL Listed Class P
- \_ FCC Part 15
- \_ Dry and damp location
- \_ Max. output power 75 W
- \_ Up to 92 % efficiency
- \_ Nominal lifetime up to 100,000 h
- \_ 5 years guarantee (conditions at [www.tridonic.com](http://www.tridonic.com))

**Housing properties**

- \_ Metal casing black
- \_ Potted style
- \_ Type of protection IP67

**Functions**

- \_ Over voltage protection
- \_ Short-circuit protection
- \_ No-load protection

**Typical applications**

- \_ For cobra head, high bay and street applications

**Website**
<http://www.tridonic.us/28002158>


Spotlights



Downlights



Linear



Area



Floor | Wall



Free-standing



Street




Decorative

**Driver LCO 75W 350/700/1050/1560/1790/2080mA 0-10V C ADV UNV**

OUTDOOR advanced series

The complete data sheet for this product is available in the Downloads section.

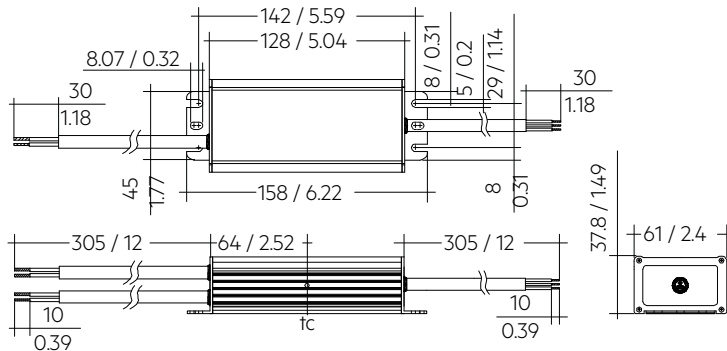

Dimensions in mm / inch

**Ordering data**

Type	Article number	Packaging, carton	Packaging, pallet	Weight per pc.
LCO 75/1790/42 0-10V C ADV UNV	28002158	10 pc(s).	420 pc(s).	1.37 lbs

**Technical data**

Rated supply voltage	100 – 277 V
AC voltage range	90 – 305 V
Mains frequency	50 / 60 Hz
Leakage current (at 120 V, 60 Hz, full load)	< 400 µA
Leakage current (at 277 V, 60 Hz, full load)	< 750 µA
Max. input power (at 120 V, 60 Hz, full load)	85.5 W
Max. input power (at 277 V, 60 Hz, full load)	84 W
λ (at 120 V, 60 Hz, full load)	0.97
λ (at 277 V, 60 Hz, full load)	0.94C
Typ. input current in no-load operation (at 120 V, 60 Hz)	40 mA
Typ. input current in no-load operation (at 277 V, 60 Hz)	60 mA
Typ. input power in no-load operation (at 120 V, 60 Hz)	< 4.66 W
Typ. input power in no-load operation (at 277 V, 60 Hz)	< 5.36 W
In-rush current (peak / duration at 120 V)	40 A / 3 µs
In-rush current (peak / duration at 277 V)	95 A / 3 µs
THD (at 120 V, 60 Hz, full load)	< 8 %
THD (at 277 V, 60 Hz, full load)	< 14 %
Starting time (full load)	≤ 1,000 ms
Turn off time at full load	< 200 ms
Output current tolerance	± 5 %
Max. output current peak (non-repetitive)	≤ output current + 35 %
Output LF current ripple (< 120 Hz)	< 5 %
Dimming range	10 – 100 %
Mains surge capability (between L - N)	2 kV
Mains surge capability (between L/N - PE)	4 kV
Type of protection	IP67
Lifetime	up to 100,000 h
Guarantee (conditions at www.tridonic.com)	5 Year(s)
Dimensions L x W x H	6.22 x 2.4 x 1.49 inch

**Approval marks**

**Standards**

UL 8750, UL 1310, FCC PART 15, ANSI C62.41, ANSI C63.4, UL 1012, NEMA 4, CSA C22.2

**Specific technical data**

Type	Output current	Min. forward voltage	Max. forward voltage	Max. output voltage (U-OUT)	Max. output power (at 120 V, 60 Hz, full load)	Typ. power consumption (at 120 V, 60 Hz, full load)	Typ. current consumption (at 120 V, 60 Hz, full load)	Typ. efficiency (at 120 V, 60 Hz, full load)	Max. output power (at 277 V, 60 Hz, full load)	Typ. power consumption (at 277 V, 60 Hz, full load)	Typ. current consumption (at 277 V, 60 Hz, full load)	Typ. efficiency (at 277 V, 60 Hz, full load)	t <sub>c</sub>	Ambient temperature t <sub>a</sub>
<b>LCO 75/1790/42 0-10V C ADV UNV</b>	1,790 mA	13 V	42 V	50 V	74.9 W	84.3 W	700 mA	88.5 %	74.9 W	82.5 W	310 mA	90.5 %	185 °F	-22 ... +140 °F