

## LED Driver

# Indoor 40W Driver Programmable Driver

SI-OU1424001WW (UL Type TL)  
SI-OU1424002WW (UL Class P)



## Constant Current LED Driver Deep Dimming up to 1%

### Features & Benefits

- Output Current Range: 400 ~ 1400 mA (Adjust through Programming tool)
- Output Voltage Range: 20 ~ 54 Vdc
- Output Power Range: Max. 40 W
- Dimming Control: 0 ~ 10 Vdc
- Input Voltage: 120 ~ 277 Vac, 50 / 60 Hz
- Safety: UL 8750
- EMI: FCC Part 15 Class A
- Protections: Short Circuit, Over Voltage, Over Temperature
- $t_a$  Range: -35 ~ +55 °C
- Expected lifetime: 50,000 hours at  $t_c < 75$  °C
- Environmental Compliance: RoHS
- Environmental Rating: Damp & Dry
- Long lasting & high reliability
- Metal housing

### Applications

- Indoor lighting



## Table of Contents

1.	Characteristics	-----	3
2.	Typical Characteristics Graphs	-----	5
3.	Protection	-----	7
4.	Dimming Specification	-----	8
5.	Reliability& standard	-----	9
6.	Outline Drawing & Dimension	-----	10
7.	Label Structure	-----	11
8.	Packing Structure	-----	11
9.	Precautions in Handling & Use	-----	12

## 1. Characteristics

Article	Symbol	Specification			Unit	Note
		Min.	Typ.	Max.		
<b>INPUT SPECIFICATIONS</b>						
Nominal Voltage	Vin	120 ~ 277			Vac	
Voltage Range		108		300		
Nominal Frequency	Fin	50 / 60			Hz	
Frequency Range		47		63		
Input Current	At 120 Vac	Iin			A	100% load
	At 277 Vac		0.5			
Input Power	Pin			50	W	Vin = 120~277Vac, 100% load
Total Harmonic Distortion	THD			20	%	Vin = 120Vac, load = 35~100% Vin = 277Vac, load = 63~100% (700~1400mA) load condition
Power Factor	PF	0.9			-	
Efficiency*	At 120 Vac	η	83	85		100% load
	At 277 Vac		86	88		
Standby Power	Pstd			1	W	
In-rush Current	Iinrush			40	A <sub>pk</sub>	Vin = 300Vac, 25°C Cold start, Duration=300us(measured at 50%Ipk).
<b>OUTPUT SPECIFICATIONS</b>						
Output Voltage	Vo	20			Vdc	
Max. Output Voltage	Vpk			60		
Output Current	Io	400			mA	Refer to note.1  When R_set and LED-(or Dim-) are connected, Iout will be set to 700mA.
				1400		
Output Current Ripple	I <sub>r</sub>			140		I <sub>r</sub> = I <sub>pk-lav</sub>
Output Peak Current	I <sub>pk</sub>			1610		
Output Power	Po			40	W	
Turn-on Delay Time	T <sub>d</sub>			1	s	

\* Measured the unit is thermally stabilized after half an hour,  $t_a=25^{\circ}\text{C}$ .

Note.1 Output current can be programmable referring the 'Application Guide for Programmable LED Driver Rev.03'.



<http://www.samsung.com/global/business/led/support/tools/quick-downloads>

Article	Symbol	Specification			Unit	Note
		Min.	Typ.	Max.		
<b>DIMMING SPECIFICATIONS</b>						
Dimming Voltage Range		0		10	Vdc	See Dimming Specification section
Dimming Voltage		1		8		Adjust the dimming curve
<b>ENVIRONMENTAL SPECIFICATIONS</b>						
Operating Temperature	$t_a$	-35		55	°C	
Case Temperature	$t_c$			89		
Storage Temperature	$t_s$	-40		80		
Storage Humidity	Hstg	10		95	%	
Operating Humidity	Hop	20		95		
Lightning Surge	L / N	±1			kV	EN 61000-4-5
	LN / GND	±2				
IP Rating			20		-	UL Damp & Dry
Expected Lifetime (e-cap)		50,000			h	<sup>1)</sup> At $t_c < 75^\circ\text{C}$ ,
MTBF			300,000			MIL-HDBK-217F(25°C)
Dimensions	L x W x H	125.6 x 61.1 x 27.5			mm	Screw mount hall : 115mm
		4.3" X 2.4" X 1.2"			Inch	
Net Weight			250		g	± 10g



1) User can check how much time the driver works by RBT function ( Record Burning Time )

## 2. Typical Characteristics Graphs



### a) Operating Area

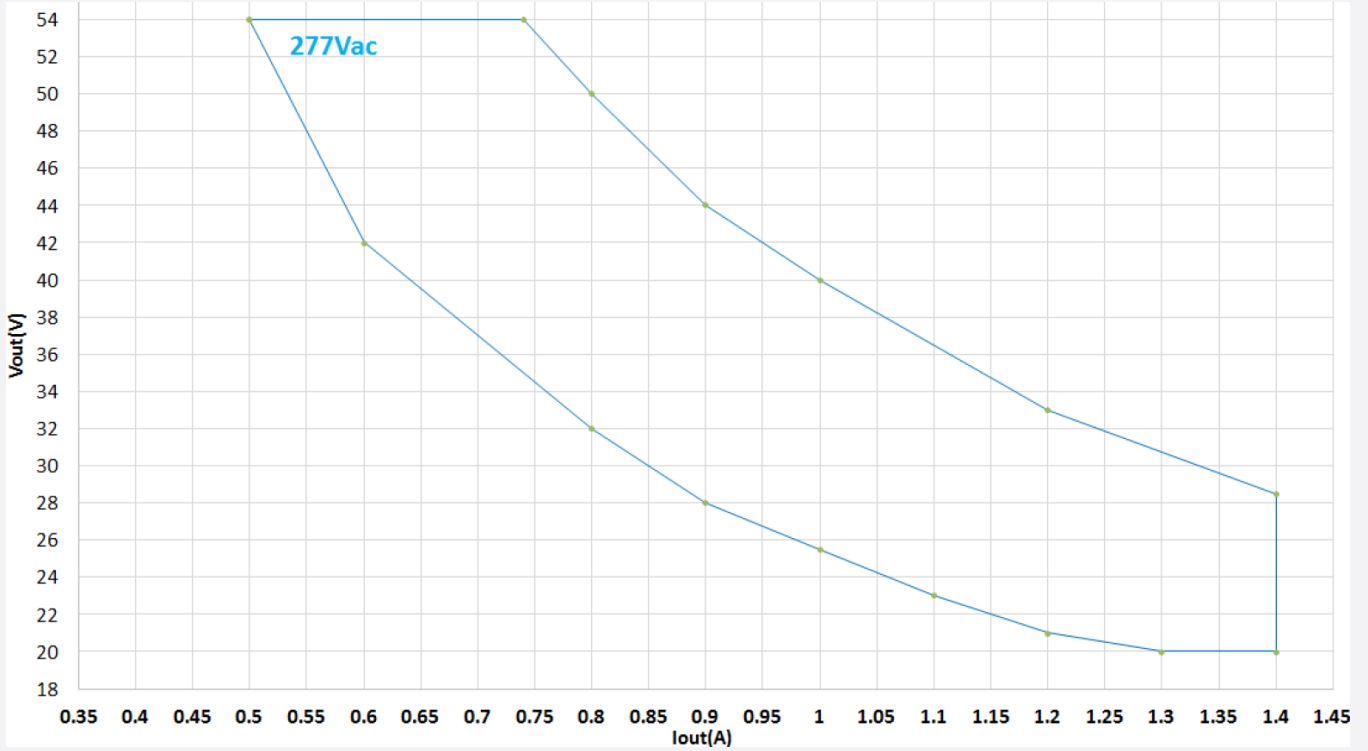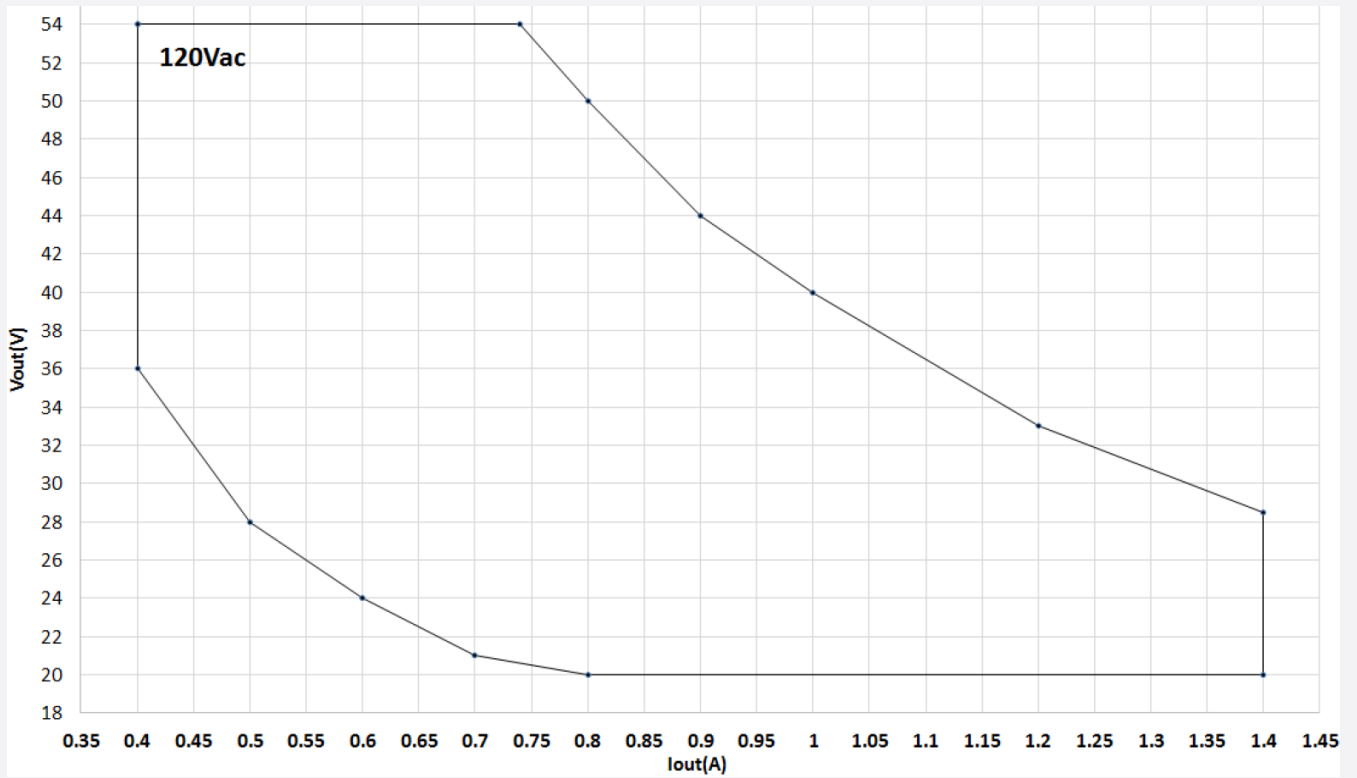



**b) Efficiency vs. Load**

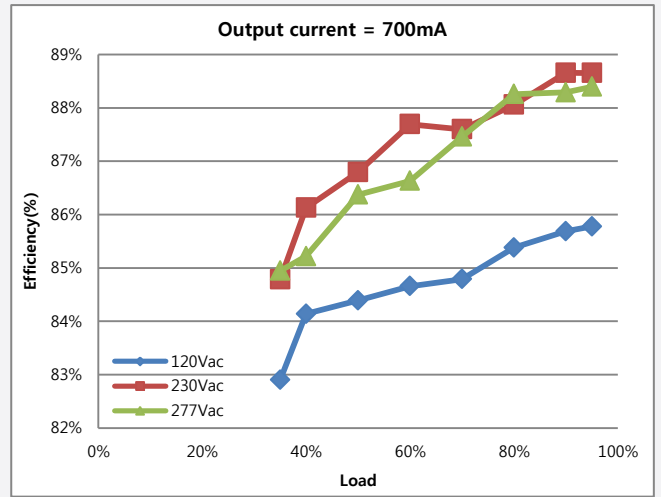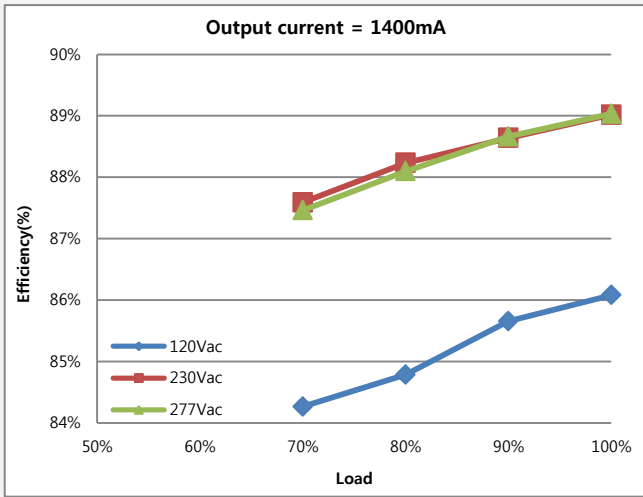


**c) Power Factor vs. Load**

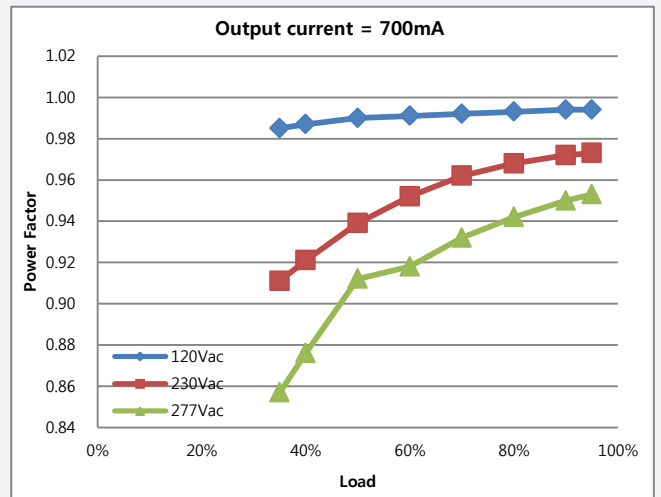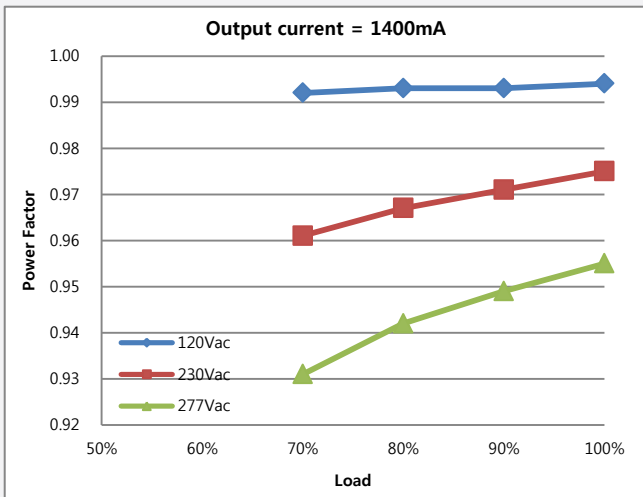

**d) Total Harmonic Distortion vs. Load**

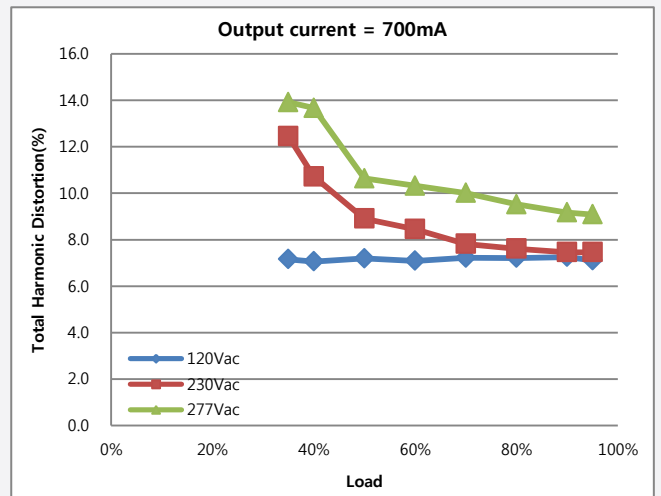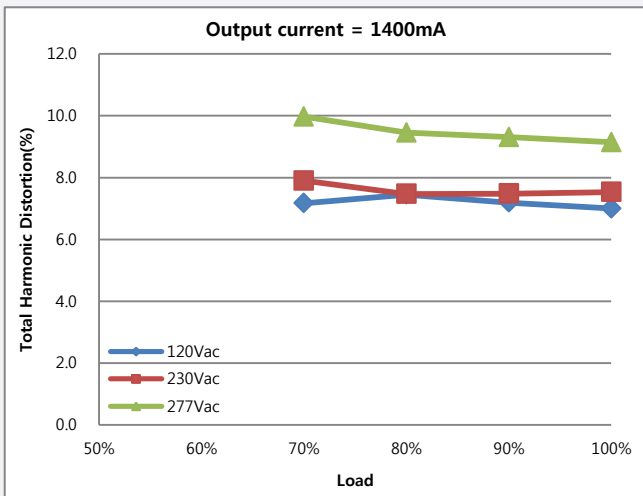

## e) Lifetime vs. Tc

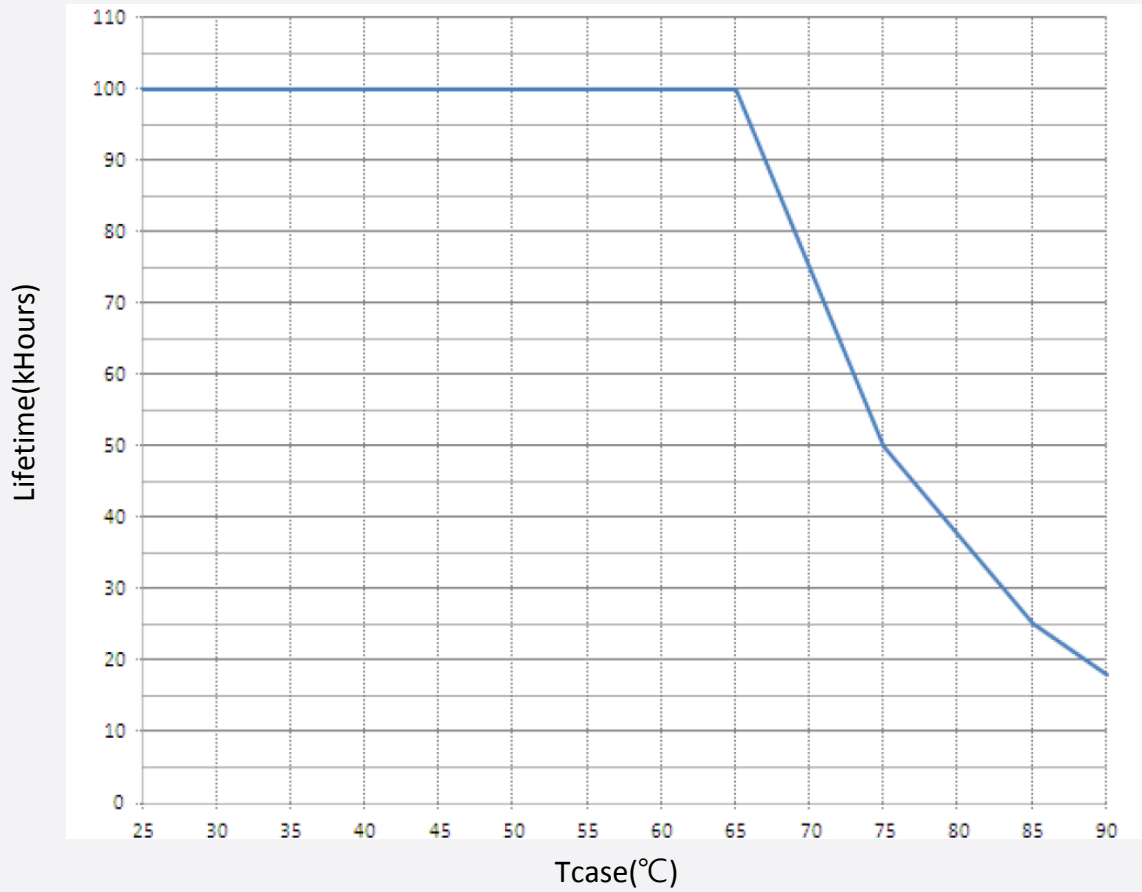

## 3. Protection

Protection Specification	Protection Mode	Condition
Output Short Protection	No output(Auto-Recovery)	(1) AC turn on then output short (2) Output short then AC turn on
Output Open Protection	Vout < 60Vdc	(1) AC turn on then output open (2) Output open then AC turn on
Output Temperature Protection	50%Io	At tsensor=115°C(typical)

## 4. Dimming Specification

The programmable driver can be programmed by using special PC software and the programming tool.


Users can download PC software from linked website.

[http://www.samsung.com/global/business/business-images/led/file/product/products/201712/Programming\\_Tool.zip](http://www.samsung.com/global/business/business-images/led/file/product/products/201712/Programming_Tool.zip)

Allow users to set the max and min output current and corresponding output voltage to clarify the 1-10V dimming curve.

Input a 0~10Vdc signal from the dimming interface.

**Default: Input  $\leq 1V$ , Output current 1%; Input  $\geq 8V$ , Output current 100%.**

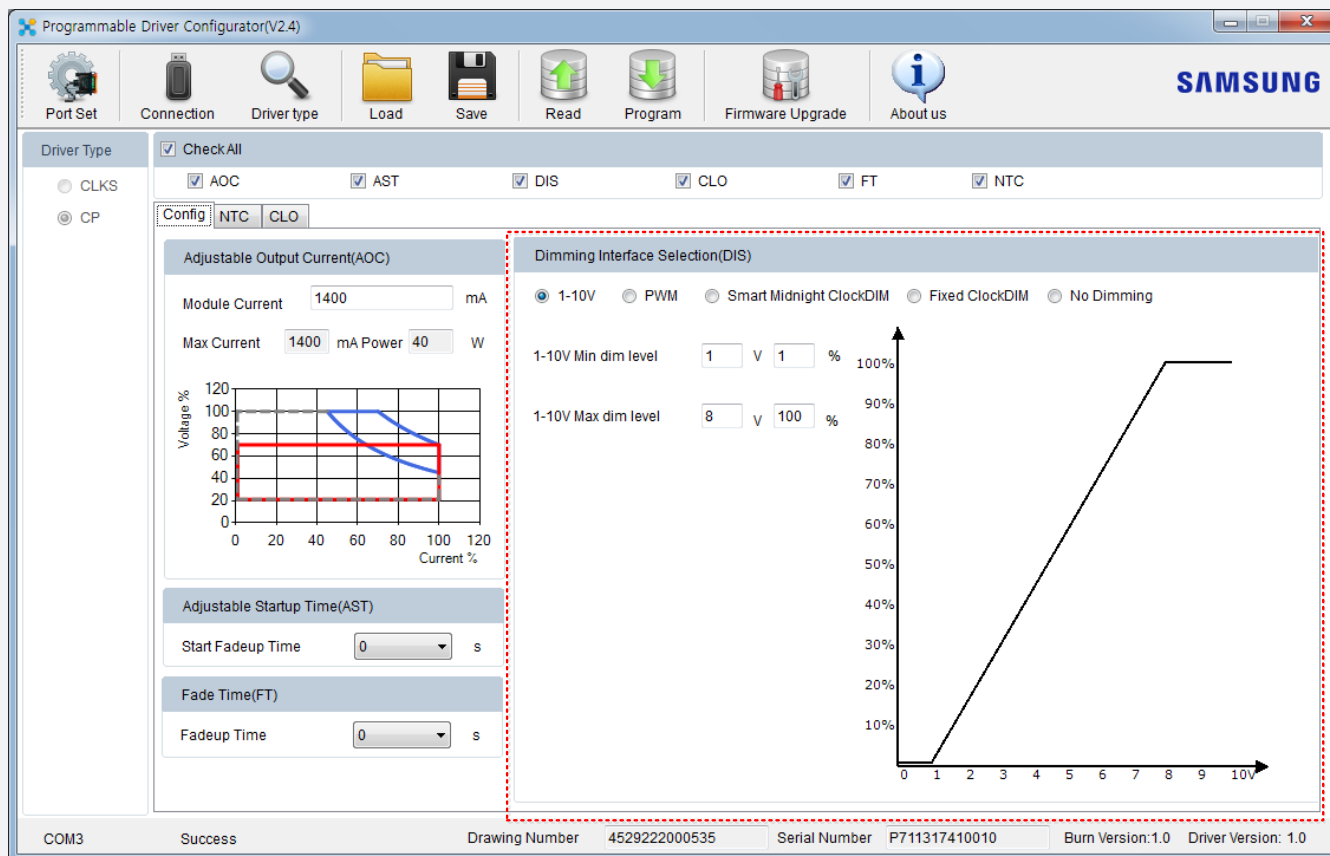

Also the PC software provides AOC(Adjustable Output Current), AST(Adjustable Startup Time) and FT(Fade Time) functions.

## Pin description

Pin	Name	Value	Description
1	Vcc	-	The Vcc port of LED driver is supplied with a voltage from programming tool When LED driver and the programming tool are connected,
2	Dim+ / Program	0-10V	Dimming / Programming input
3	Dim-	-	DC ground



## 5. Reliability& Standards

### Test Items and Conditions


Test Item	Specification	Condition	
Leakage Current	< 0.5 mA		
Earth Continuity	< 0.1 $\Omega$	IEC/EN 61347	
Hi-Pot	Input – Output	3750 Vac, 60 s, cut-off current 10 mA	
	Input – F.G	1875 Vac, 60 s, cut-off current 10 mA	
	Output – F.G	1500 Vac, 60 s, cut-off current 10 mA	
Insulation Resistance	Input – Output	500 Vdc, 60 s, insulation resistance 10 M $\Omega$	
Surge	L / N	$\pm 1$ kV	EN 61547
	LN / GND	$\pm 2$ kV	
ESD	Contact	$\pm 8$ kV	IEC 61000-4-2
	Air	$\pm 15$ kV	

### Safety, EMI and EMC

International Standard	Certification
Safety Standards	UL 8750, UL1310 Class 2
Conducted and Radiated Emission Test	FCC Part 15 Class A
Harmonic current emissions: Class C	Comply with IEC/EN 61000-3-2
Voltage Fluctuations and Flicker	Comply with IEC/EN 61000-3-3
Electrostatic Discharge (ESD) Contact 8kV, Air 15kV	Comply with IEC/EN 61000-4-2
Radio-frequency Electromagnetic Fields	Comply with IEC/EN 61000-4-3
Electrical Fast Transients (EFT)	Comply with IEC/EN 61000-4-4
Surges: Differential 1kV, Common 2kV	Comply with IEC/EN 61000-4-5
Injected Currents	Comply with IEC/EN 61000-4-6
Power Frequency Magnetic Fields	Comply with IEC/EN 61000-4-8
Voltage Dips and Short Interruptions ( Class B )	Comply with IEC/EN 61000-4-11

## 6. Outline Drawing & Dimension

Dimension : 125.6 (L) x 61.1 (W) x 27.5 (H) Unit: mm

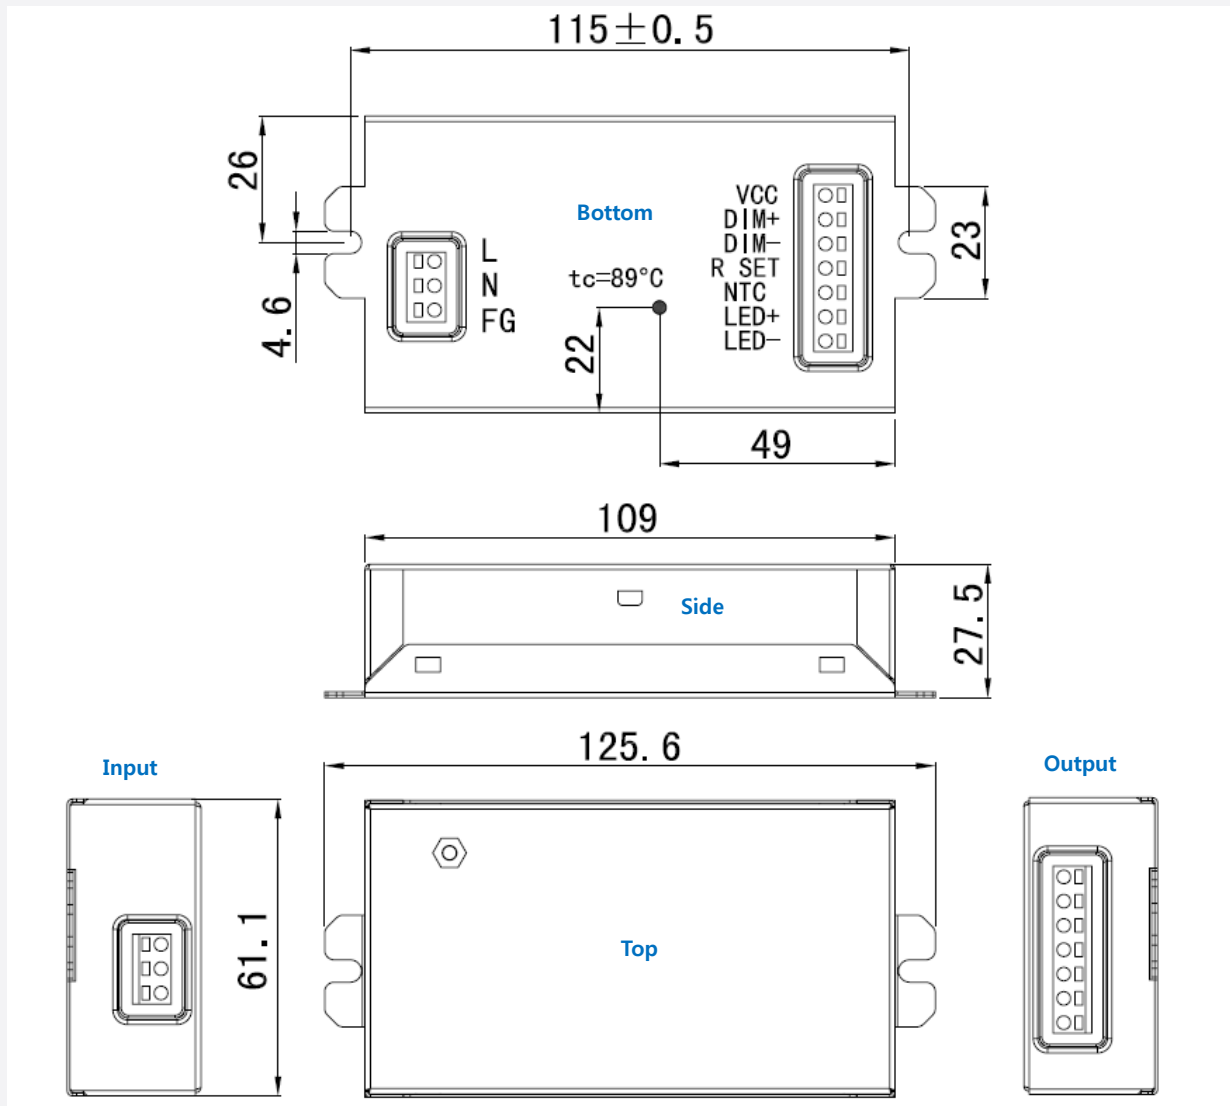

### Pin map

Pin	Input		Output	
	Name	Feature	Name	Feature
1	L	Live	Vcc	Supply voltage from the programming tool
2	N	Neutral	DIM +	Dimming / Program signal input
3	FG	Frame Ground	DIM -	Signal Ground
4	-	-	R Set	If this pin is connected to LED-(or DIM-), the output current will be set to 700mA.
5	-	-	NTC	A NTC components must be connected between DIM- and NTC port.
6	-	-	LED+	Supply power to LED module
7	-	-	LED-	Power Ground

## 7. Label Structure



For SI-OU1424001WW, UL Type TL

- GREEN
- AC/N WHITE
- AC/L BLACK

# SAMSUNG

**LED Driver Energy Saving Solutions**  
**Model : SI-OU1424001WW**  
 Input Voltage : 120-277 Vac 50/60Hz  
 Input Current : 0.50A  
 Output Voltage : 20-54Vdc  
 Output Current : 400-1400mA  
 Output Power : 40W Max  
 Constant Current : 0-10V Dimmable  
 Dimmable : 100%-1%  
 Class 2 Output  
 Suitable for use in Dry & Damp Locations  
 Type TL : 89/71°C

- LED-/BLUE
- LED+/RED
- NTC/BROWN
- R\_SET/WHITE
- DIM-/GRAY
- DIM+/PURPLE
- VCC/YELLOW

**RoHS**

**MADE IN CHINA**



For SI-OU1424002WW, UL Class P

- GREEN
- AC/N WHITE
- AC/L BLACK

# SAMSUNG

**LED Driver Energy Saving Solutions**  
**Model : SI-OU1424002WW**  
 Input Voltage : 120-277 Vac 50/60Hz  
 Input Current : 0.50A  
 Output Voltage : 20-54Vdc  
 Output Current : 400-1400mA  
 Output Power : 40W Max  
 Constant Current : 0-10V Dimmable  
 Dimmable : 100%-1%  
 Class 2 Output  
 Suitable for use in Dry & Damp Locations  
 For Connections Use Wire Rated For at Least 90°C (194°F)  
 Class P  
 tc: 89°C

- LED-/BLUE
- LED+/RED
- NTC/BROWN
- R\_SET/WHITE
- DIM-/GRAY
- DIM+/PURPLE
- VCC/YELLOW

**RoHS**

**MADE IN CHINA**

## 8. Packing Structure

Packing material	Max. quantity (pcs)	Dimension (mm)		
		Length	Width	Height
Outer Box	48	505	370	170
Pallet	1440	1219	1016	960

## 9. Precautions in Handling & Use

- 1) To prevent the LED Driver from any defect, please handle and store it with care
  - Do not drop or give shock
  - Do not store in very humid location or at extreme temperature
  - Do not open or disassemble the product
- 2) Static electricity or surge voltage may damage the components inside LED Driver, as such please observe proper anti-electrostatic working process
  - People handling the Driver should be well grounded (e.g. using ESD wrist band) and wear anti-static working clothes and gloves
  - All related devices and instruments in the production line should be well grounded (e.g. working table, measuring equipment, assembly jigs)
- 3) Observe the correct polarity of output terminal
- 4) Avoid input voltage exceeds the maximum rating, which will cause damage to the circuit and result in malfunction

# Legal and additional information.

## [About Samsung Electronics Co., Ltd.](#)

Samsung Electronics Co., Ltd inspires the world and shapes the future with transformative ideas and technologies.

The company is redefining the worlds of TVs, smartphones, wearable devices, tablets, digital appliances, network systems, and semiconductor and LED solutions. For the latest news, please visit the Samsung Newsroom at <http://news.samsung.com>.

Copyright © 2018 Samsung Electronics Co., Ltd. All rights reserved.  
Samsung Electronics reserves the right to modify, at its sole discretion, the design, packaging, specifications and features shown herein without notice at any time.

Samsung Electronics Co., Ltd.  
Samsung-ro, Giheung-gu  
Yongin-si, Gyeonggi-do, 17113  
KOREA  
[www.samsungled.com](http://www.samsungled.com)