
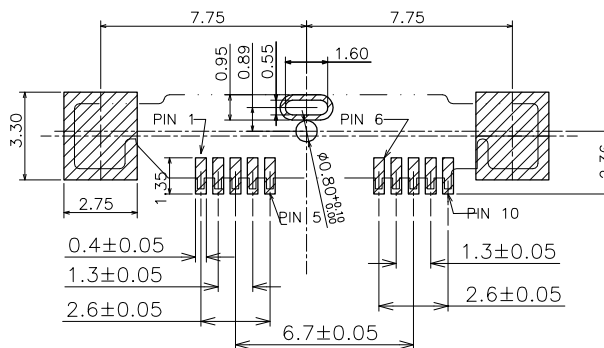





REVISION RECORD		
REV	DESCRIPTION	DRFT

H
G
F
E
D
C
B
A

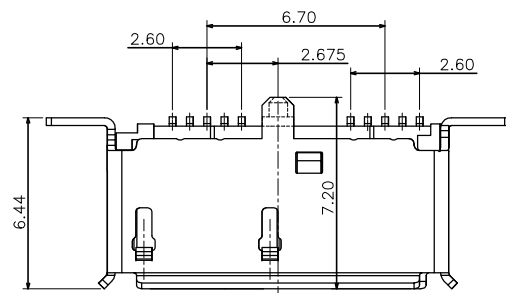


NOTES:

- MACHANICAL CHARACTERISTICS:
 MATING FORCE: 1.30±0.30kgf.
 UNMATING FORCE: 1.30±0.30kgf.
 DURABILITY: 10000 CYCLES
- ELECTRICAL CHARACTERISTICS:
 CURRENT RATING:1.5A
 CONTACT RESISTANCE:30mΩMax.
 DIELECTRICAL WITHSTANDING:100V AC/1min.
 INSULATION RESISTANCE:100MΩ
- MATERIAL:
 PLASTIC:LCP WITH 30% GF,UL 94V-0 ,BLACK.
 TERMINAL:BRASS, T=0.15mm
 TERMINAL PLATING:
 50u" NICKEL UNDERPLATING OVER ALL,
 15u" GOLD PLATING ON THE CONTACT AREA
 100u" TIN PLATING ON THE SOLDER AREA
 SHIELD: STEEL 0.3 THICKNESS.
 SHIELD PLATING: 50~120u" NICKEL PLATING OVER ALL
- OTHERS:
 OPERATION TEMPERATURE: -20°C to +80°C

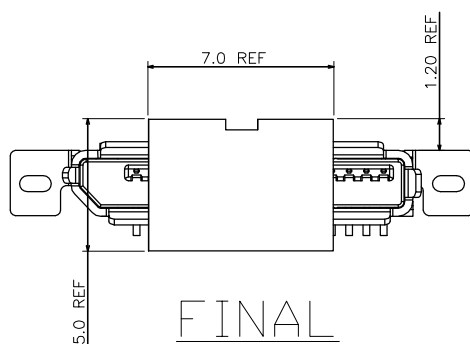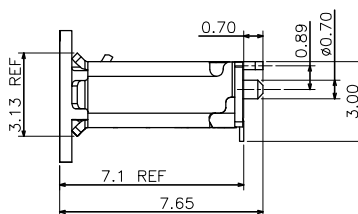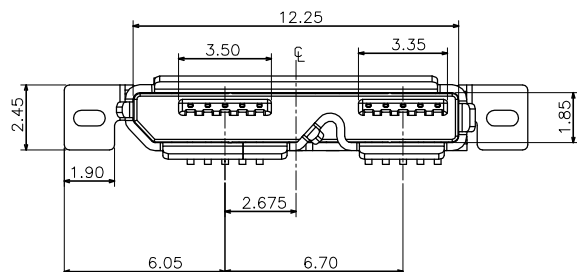

FINAL

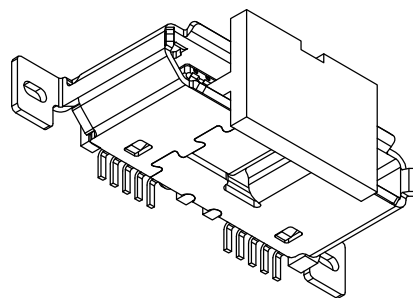

DETACHED LISTS	MM (INCH)	DFTD Roy	DATE 11/20/2012		RoHS Compliant	
	TOLERANCES EXCEPT AS NOTED	CHKD	DATE			
	MM	±	APPVL	DATE	TITLE USB 3.0 Micro BF SMD SHORT BODY	
	.0 ± 0.35	±	MATERIAL :			
.0 ± 0.25	±	ANGLES: X*±1° X.X*±0.5°		DRAWING NO. E8110-033-01		
.00 ± 0.15	±	THIRD ANGLE PROJECTION		/PART NO. E8110-033-01		
.000 ± 0.05	±	FINISH :		SIZE A3		
SCALE : 1:1		DO NOT SCALE DRAWING		REV 01		
SHEET 1 OF 1						