

# EBK+x | Spherical revolving handle

Technopolymer

METRIC

RoHS

PP

+176 °F  
+32 °F

## MATERIAL

High-resilience polypropylene based (PP) technopolymer, black colour, matte finish.

## STANDARD EXECUTION

Zinc-plated steel pin, hexagon socket at threaded end.

# I.229+x | Revolving handle

Duroplast

METRIC

RoHS

PF

+230 °F  
-4 °F

## MATERIAL

Phenolic based (PF) Duroplast, black colour, glossy finish.

## STANDARD EXECUTION

Zinc-plated steel threaded pin, two flat faces for fitting with 12 mm spanner.



ERGOSTYLE® ELESA Original design



### Conversion Table


1 mm = 0.039 inch

D	
mm	inch
50	1.97

### Conversion Table


1 mm = 0.039 inch

L	
mm	inch
62	2.44

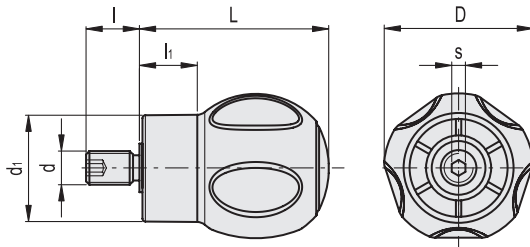

METRIC

Code	Description	D	L	d <sub>6g</sub>	d <sub>1</sub>	l	l <sub>1</sub>	s	⚖
245292	EBK.50+x-M10	50	62	M10	36	17	19	5	90

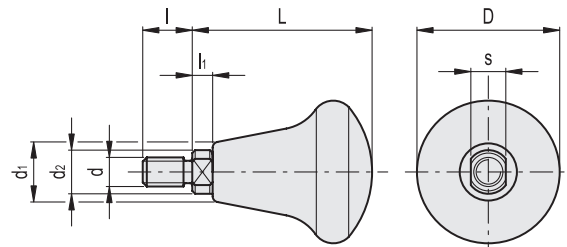

METRIC

Code	Description	D	L	d <sub>6g</sub>	d <sub>1</sub>	d <sub>2</sub>	l	l <sub>1</sub>	s	⚖
21451	I.229/55+x-M10	49	62	M10	20	15	17	7	12	115