

## GI-ACC-EDH-16W



**Output Power**  
16 Watts

**Output Voltage**  
170V DC

**Input Current**  
80 mA (Max)

**Input Power**  
4 Watts (Max)

**Input Voltage**  
100-277VAC, 50-60Hz

**Emergency Operation**  
≥ 90 Minutes

**Operating Temp**  
0 °C to 50 °C

**Battery**  
Lithium

**Recharge**  
36 Hrs

**Dimension**  
L 17.14" x W 2.13" x H 1.38"

## GI-ACC-EDH-25W



**Output Power**  
25 Watts

**Output Voltage**  
170V DC

**Input Current**  
110 mA (Max)

**Input Power**  
6 Watts (Max)

**Input Voltage**  
10-277VAC, 50-60Hz

**Emergency Operation**  
≥ 90 Minutes


**Operating Temp**  
0 °C to 50 °C

**Battery**  
Lithium


**Recharge**  
36 Hrs

**Dimension**  
L 17.14" x W 2.13" x H 1.57"

## TYPICAL WIRING DIAGRAM

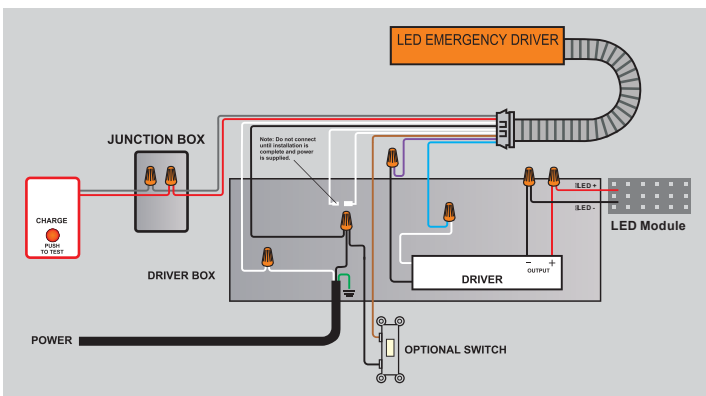

Single Flex

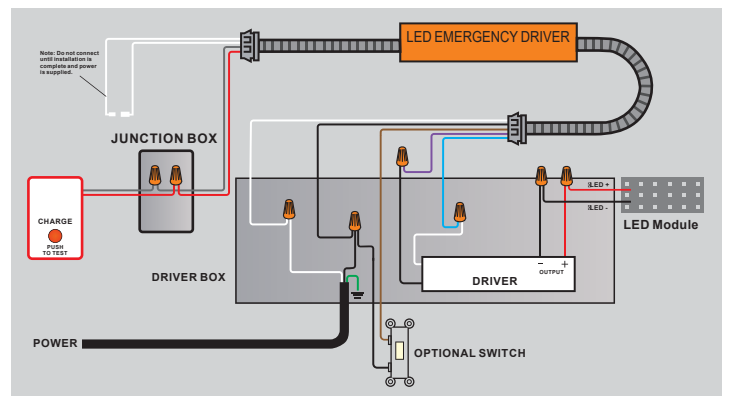

Dual Flex