

## SUMMARY

### # Wires

Low voltage 55



*Image is for illustrative purpose only*

Series	LM
Termination type	Female crimp
IP rating	68 mated (mating interface)
AWG wire size	24.00 - 20.00
Cable Ø	11.35 - 22.70 mm
Status	Active
Matching parts	<a href="#">FMW.LM.355.XLC</a>

### Download

[Request a quote](#)

[Catalog](#)

## TECHNICAL DETAILS

### Mechanics

Shell Style/Model	ED*: Fixed receptacle with square flange
Keying	5 keys (alpha=95, beta=115, gamma=35, delta=25, plug: male contacts, receptacle: female contacts)
Housing Material	Aluminium (nickel plated [SAE AMS QQ N 290], anthracite color) shell and nut, other pieces bronze/brass
Weight	26.46 g

### Performance

Configuration	LM.355 : 55 (0.9 mm) Low Voltage
Insulator	L: PEEK
Rated Current	3.5 Amps

### Specifications

Contact Type: Crimp  
Contact Retention: 30 N  
Contact Dia.: 0.9 mm (0.035in)  
Bucket Dia.: 1.1 mm (0.043in)  
Min. Conductor: 0.25 mm<sup>2</sup> (AWG 24)  
Max. Conductor: 0.5 mm<sup>2</sup> (AWG 20)  
R (max): 4.8 mOhm


*LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.*

Test voltage (kV rms) Contact-contact: 1.65  
Test voltage (kV rms) Contact-shell: 1.95

Others

Endurance (Shell): 3000 mating cycles  
Temp (min / max): -20°C / +200°C  
Humidity (max): 21 days at 95%  
Gunfire vibration: 25 Hz - 2000 Hz, 3 axis (Apache helicopter)  
Vibration-Sine: 30 g, 3 axes, 12 hr [10 Hz - 2000 Hz]  
Vibration-Random: 37.8 g rms - 3 axes, 4 hr amb [50 Hz - 2000 Hz]  
Shock Resistance: 300 g [ 3 ms]  
Lighting strike EIA 364-75: 10K amps - 6 times  
Thermal shock: 5 cycles: -65°C to +150°C  
EMI Shielding EIA 364-66A: >= 80 dB (1 GHz), >=70 dB (3 GHz), >= 58 dB (6 GHz), >= 40 dB (10 GHz)  
Salt Spray Corrosion: max. 48 hr

DRAWINGS

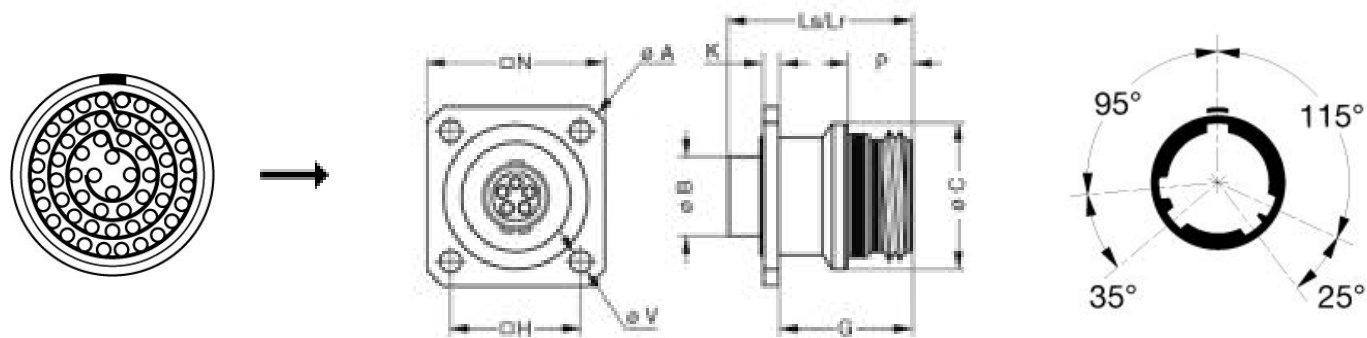

Dimensions

	A	B	C	G	H	K	Lr	Ls	N	P	SV
mm.	38	17.95	28	14.5	23	2	21.9	20	28.5	7.9	3.3
in.	1,50	0,71	1,10	0,57	0,91	0,08	0,86	0,79	1,12	0,31	0,13

RECOMMENDED BY LEMO

LEMO products and services are provided “as is”. LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

## Tools

Crimp Tool:	<a href="#">DPC.91.701.V</a>
Crimp settings:	AWG/Selector = 20-22-24/6-5-5
Positionner:	<a href="#">DCE.91.09T.5MVM</a>
Extractor:	<a href="#">DCC.09.05B.LAG</a>
Replacement contact:	EGW.TM.660.ZZM