

SUMMARY

Wires

| | |
|-------------|---|
| Low voltage | 2 |
|-------------|---|



Image is for illustrative purpose only

| | |
|------------------|-----------------------------|
| Series | 0T |
| Termination type | Female solder |
| IP rating | 68 mated (mating interface) |
| AWG wire size | 28.00 - 20.00 |
| Cable Ø | 0.00 - 0.00 mm |
| Status | Active |

Download

[Request a quote](#)

[Catalog](#)

TECHNICAL DETAILS

Mechanics

| | |
|-------------------|--|
| Shell Style/Model | EG*: Fixed receptacle, nut fixing, black POM outer shell |
| Keying | 1 key (alpha=0, plug: male contacts, receptacle: female contacts) |
| Housing Material | POM (Polyoxymethylene, black) shell and collet nut, nickel plated [SAE AMS QQ N 290] brass latch sleeve and mid pieces |
| Weight | 4.48 g |

Performance

| | |
|---------------|---------------------------|
| Configuration | T.302 : 2 Low Voltage |
| Insulator | L: PEEK (UL 94 / V-0/1.5) |
| Rated Current | 10 Amps |

Specifications


| | |
|--------------------------|-------------------------------|
| Contact Type: | Solder |
| Contact Dia.: | 0.9 mm (0.035in) |
| Bucket Dia.: | 1.0 mm (0.039in) |
| Max. Solid Conductor: | 0.56 mm ² (AWG 20) |
| Max. Stranded Conductor: | 0.56 mm ² (AWG 20) |
| R (max): | 4.8 mOhm |
| Vtest (contact-shell): | 1050 V (AC), 1490 V (DC) |
| Vtest (contact-contact): | 1000 V (AC), 1400 V (DC) |

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

Others

- Endurance (Shell): >3000 mating cycles
- Humidity (max): <=95% [at 60 deg C /140 F]
- Resistance to vibration: 15 g [10 Hz - 2000 Hz]
- Shock Resistance: 100 g [6 ms]
- Climatical Category: 50/175/21
- Shielding efficiency (min): 75 dB (at 10 MHz)
- Shielding efficiency (min): 40 dB (at 1 GHz)

DRAWINGS

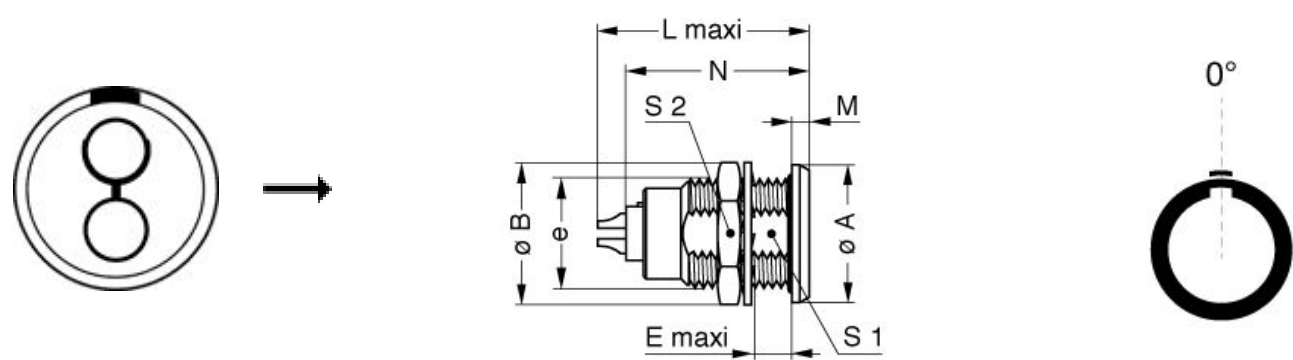

Dimensions


























| | A | B | E | L | M | N | S1 | S2 | e |
|-----|------|------|------|------|------|------|------|------|--------|
| mm. | 12 | 12.5 | 6 | 21 | 1.5 | 19.1 | 8.2 | 11 | M9x0.6 |
| in. | 0,47 | 0,49 | 0,24 | 0,83 | 0,06 | 0,75 | 0,32 | 0,43 | |

RECOMMENDED BY LEMO

Tools

Cables

LEMO products and services are provided “as is”. LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

| | | | |
|--------------------|------|--------|---|
| CMN.02.T28.030PGCE | PVC | GREY |  |
| CMN.02.T28.030PGZE | | Grey |  |
| CMN.02.T28.030PNCE | PVC | Black |  |
| CMN.02.T28.030PNZE | | |  |
| 102080 | PVC | Grey | |
| 120184 | PVC | Black |  |
| 120240 | PVC | Black |  |
| 120250 | PVC | Grey |  |
| 20140 | PVC | Grey |  |
| 20140 | PVC | Grey |  |
| 20141 | PVC | Grey |  |
| 20142 | PVC | Red |  |
| 20143 | PVC | Green |  |
| 20144 | PVC | Black |  |
| 20145 | PVC | Yellow |  |
| 20146 | PVC | Black |  |
| 20240 | PTFE | White |  |
| 20260 | PVC | Black |  |
| 20264 | PVC | Black |  |
| 20266 | PVC | Violet |  |
| 2050 | PVC | Black |  |
| 20550 | PUR | Black |  |
| 20560 | PUR | White |  |
| 2080 | PVC | Grey | |
| 2221 | PVC | Black |  |
| 2260 | PTFE | White |  |
| 2280 | PVC | Black |  |
| 4082 | PVC | Grey | |
| CMB.02.210.635 | PUR | Black | |

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.