

Illuminated Anti-Vandal – 12mm

Specifications

Electrical Ratings	2A @ 48VDC	Actuation Force	500 ± 100gF
Electrical Life	200,000 cycles typical	Actuation Travel	1.7 ± .25mm
Contact Resistance	≤ 50mΩ initial	Dielectric Strength	2000Vrms min between contacts
Mechanical Resistance	500,000 cycles typical	Insulation Resistance	≥ 100MΩ min @ 250VDC
Sealing Degree	IP67	Operating Temperature	-20°C to 70°C
		Storage Temperature	-20°C to 70°C

Materials

Actuator	Polybutylene Terephthalate (PBT) or Stainless Steel
Base	Polybutylene Terephthalate (PBT)
Housing	Aluminum or Stainless Steel
Contacts	Silver Alloy
Terminals	Nickel Plated Brass
Hardware - Nut	Nickel Plated Brass

Custom Capabilities Contact Factory



Cable Assemblies





Ordering Information

1. Series	EH	12	N	M	SS		B	BO																				
EH																												
2. Switch Body Diameter	12 = 12mm																											
3. Switch Function	N = Momentary																											
4. Actuator Style:	M = Round L = Round with LED																											
5. Switch Finish	SS = Brushed Stainless Steel B = Black Anodized Aluminum																											
6. Cap Color Options	Blank = Stainless Steel 2 = Black 3 = Red 4 = Yellow 5 = Green 7 = Blue																											
7. Terminal Options	Z = Screw Terminals *not available with illuminated option B = Solder Lugs																											
8. LED Color	<table border="0"> <tr> <td>X = No LED</td> <td>RO = Red / Orange dual LED</td> </tr> <tr> <td>R = Red</td> <td>RY = Red / Yellow dual LED</td> </tr> <tr> <td>Y = Yellow</td> <td>RG = Red / Green dual LED</td> </tr> <tr> <td>G = Green</td> <td>RB = Red / Blue dual LED</td> </tr> <tr> <td>B = Blue</td> <td>OY = Orange / Yellow dual LED</td> </tr> <tr> <td>W = White</td> <td>OG = Orange / Green dual LED</td> </tr> <tr> <td>O = Orange</td> <td>OB = Orange / Blue dual LED</td> </tr> <tr> <td></td> <td>YG = Yellow / Green dual LED</td> </tr> <tr> <td></td> <td>YB = Yellow / Blue dual LED</td> </tr> <tr> <td></td> <td>GB = Green / Blue dual LED</td> </tr> </table>								X = No LED	RO = Red / Orange dual LED	R = Red	RY = Red / Yellow dual LED	Y = Yellow	RG = Red / Green dual LED	G = Green	RB = Red / Blue dual LED	B = Blue	OY = Orange / Yellow dual LED	W = White	OG = Orange / Green dual LED	O = Orange	OB = Orange / Blue dual LED		YG = Yellow / Green dual LED		YB = Yellow / Blue dual LED		GB = Green / Blue dual LED
X = No LED	RO = Red / Orange dual LED																											
R = Red	RY = Red / Yellow dual LED																											
Y = Yellow	RG = Red / Green dual LED																											
G = Green	RB = Red / Blue dual LED																											
B = Blue	OY = Orange / Yellow dual LED																											
W = White	OG = Orange / Green dual LED																											
O = Orange	OB = Orange / Blue dual LED																											
	YG = Yellow / Green dual LED																											
	YB = Yellow / Blue dual LED																											
	GB = Green / Blue dual LED																											


Dimensions

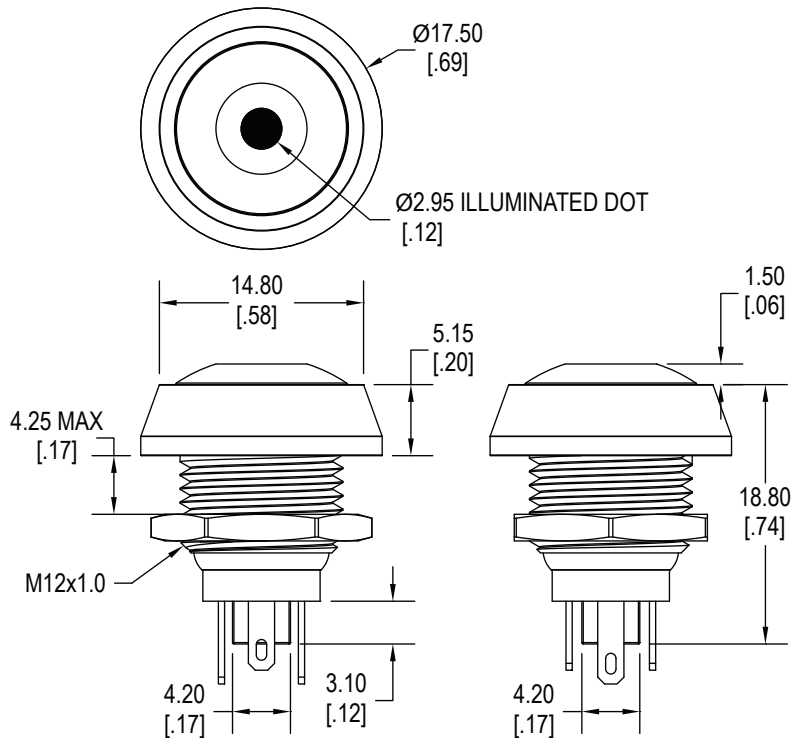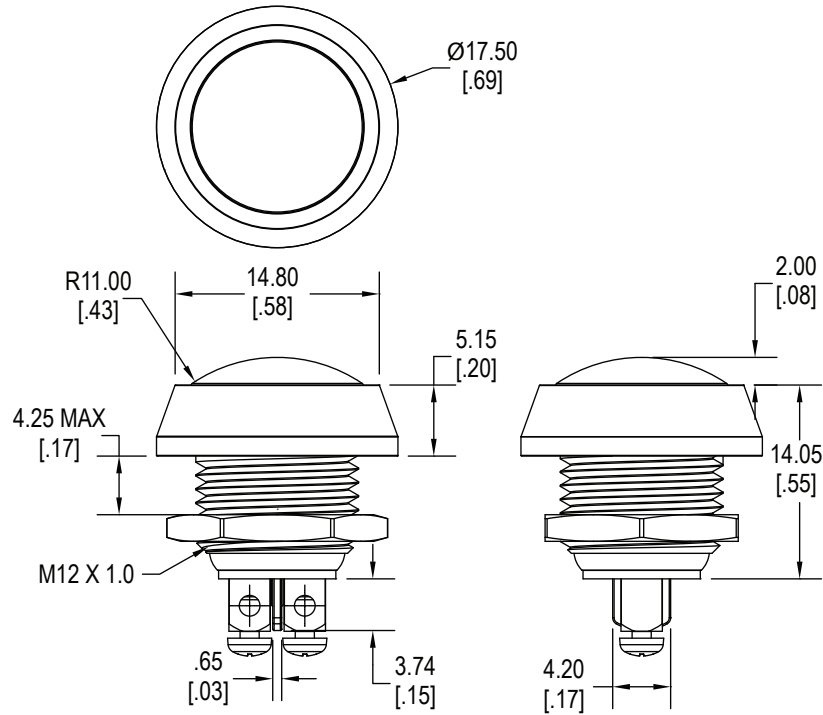

Schematics




Panel Cut-Out




Terminal Options


Screw Terminal

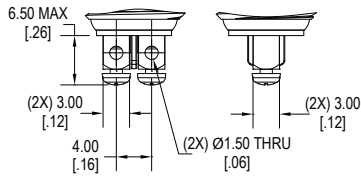

Solder Lug

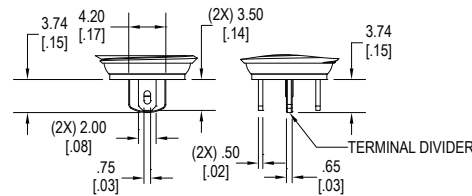

Solder Lug with LED

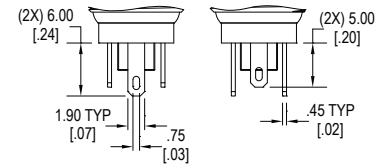

LED Characteristics

LED Ratings		Color						
		R	Y	G	B	O	W	Units
Reverse Voltage	V_R	5	5	5	5	5	5	V
Forward Current (avg)	I_F	25	25	30	30	25	30	mA
Forward Current (peak)	I_{FS}	120	120	160	160	120	160	mA
Reverse Current $V_R = 5V$	I_R	10	10	10	10	10	10	μA
Power Dissipation	P_T	80	80	120	120	80	120	mW
Operating & Storage Temperature	T_A	-40 ~ +85						C°
Forward Voltage (typ) $I_F = 20mA$	V_F	2.1	2.1	3.3	3.3	2.0	3.0	V
Forward Voltage (max) $I_F = 20mA$	V_F	2.4	2.5	3.6	3.6	2.3	3.6	V
Wavelength at Peak Emission $I_F = 20mA$	λ_P	635	592	516	463	606	n/a	nm
Spectral Line Half-Width $I_F = 20mA$	$\Delta\lambda$	14	12	28	20	12	n/a	nm
Luminous Intensity, $I_F = 20mA$	LI	120	120	170	100	120	700	mcd
Viewing Angle	Θ	145	145	145	145	145	145	deg