

SUMMARY

Wires

Low voltage 67



Image is for illustrative purpose only

Series 1R
Termination type Male crimp
IP rating 50
AWG wire size 0.00 - 0.00
Cable Ø 2.00 - 9.20 mm
Status Active

Download

[Request a quote](#)

[Catalog](#)

TECHNICAL DETAILS

Mechanics

Shell Style/Model FGG*: Straight plug, key (G) or key (A), with cable collet
Keying 3 keys (alpha=50,beta=30, plug: male contacts, receptacle: female contacts)
Housing Material Crastin® PBT (Polybutylene terephthalate), gray
Weight 17.22 g

Performance

Configuration 1R.367 : 67 low voltage
Insulator L: PEEK (UL 94 / V-0/1.5)
Rated Current 0.5 Amps


Specifications

Contact Type: Crimp
Test voltage (kV rms) Contact-contact: 0.6

Others

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

DRAWINGS

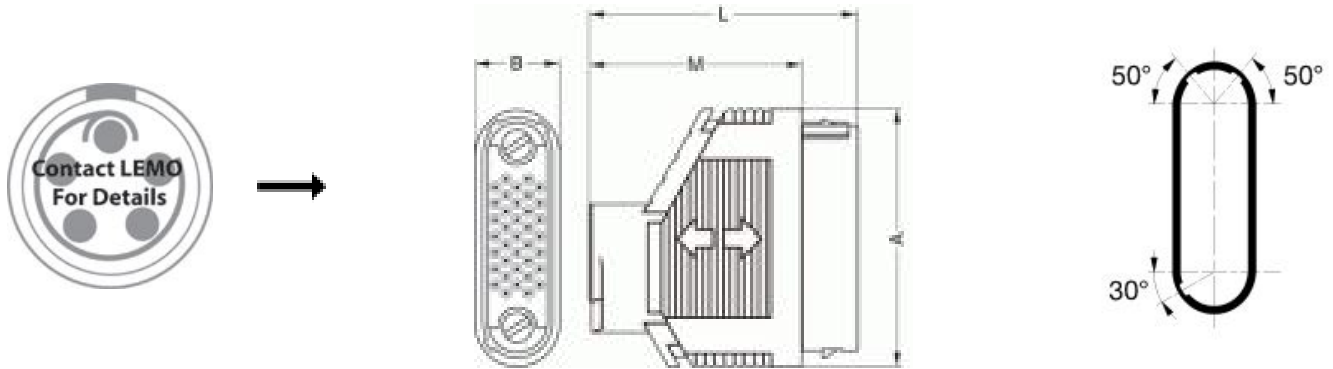

Dimensions

	A	B	L	M
mm.	37	12.5	39	31
in.	1,46	0,49	1,54	1,22

RECOMMENDED BY LEMO

Tools

- Crimp Tool: [DPC.91.701.V](#)
Positionner: [DCE.91.050.BVC](#)
Extractor: [DCC.05.02B.LAG](#)

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.