


Flared Nylon Insulated Butt Connector

Material: Tin Plated Copper
Maximum Electrical Rating: 105°C, 600V
Insulation Material: 6/6 Nylon




T = Material Thickness

HOFFMAN PART NO.	WIRE SIZE	BARREL TYPE	AMPS	DIMENSIONS (INCHES)					T	UL	TAPE MOUNTED REEL QTY	DIE FOR TAPE MOUNTED	HAND TOOL
				L	D	d1	T	UL					
FNC2216	22-16	Tubular	9 - 18	0.992	0.157	0.067	0.031	Y	Y	1000	3V2216	YNM2210	
FNC2216/J	22-16	Tubular	9 - 18	0.894	0.157	0.067	0.031	Y	Y	1000	3V2216	YNT2216	
FNC2216WS	22-16	Butted Seam	9 - 18	0.992	0.157	0.067	0.031	Y	Y	1000	3V2216	YNM2210	
FNC1614	16-14	Tubular	18 - 30	0.992	0.177	0.091	0.031	Y	Y	1000	3V1614	YNM2210	
FNC1614/J	16-14	Tubular	18 - 30	0.894	0.177	0.091	0.031	Y	Y	1000	3V1614	YNT1614	
FNC1614WS	16-14	Butted Seam	18 - 30	0.992	0.177	0.091	0.031	Y	Y	1000	3V1614	YNM2210	
FNC1210	12-10	Tubular	35 - 50	1.110	0.248	0.134	0.039	Y	Y	500	3V1210	YNM2210	
FNC1210/J	12-10	Tubular	35 - 50	1.051	0.268	0.134	0.039	Y	Y	500	3V1210	YNT1210S	
FNC1210WS	12-10	Butted Seam	35 - 50	1.110	0.248	0.130	0.039	Y	Y	500	3V1210	YNM2210	

Nylon Insulated Window with Sleeve

Material: Tin Plated Copper
Maximum Electrical Rating: 105°C, 600V
Insulation Material: 6/6 Nylon
Inside Sleeve Material: Tin Plated Copper

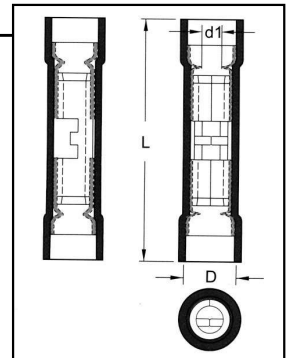

T = Material Thickness

HOFFMAN PART NO.	WIRE SIZE	BARREL TYPE	AMPS	DIMENSIONS (INCHES)					T	UL	TAPE MOUNTED REEL QTY	DIE FOR TAPE MOUNTED	HAND TOOL
				L	D	d1	T	UL					
NDCW2216	22-16	Butted Seam	9 - 18	1.228	.169	.067	.031	Y	Y	NA	NA		
NDCW1614	16-14	Butted Seam	18 - 30	1.228	.197	.091	.031	Y	Y	NA	NA	YNM2210D	
NDCW1210	12-10	Butted Seam	35 - 50	1.575	.260	.134	.039	Y	Y	NA	NA		

