
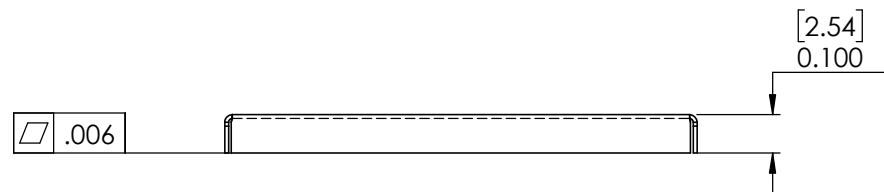
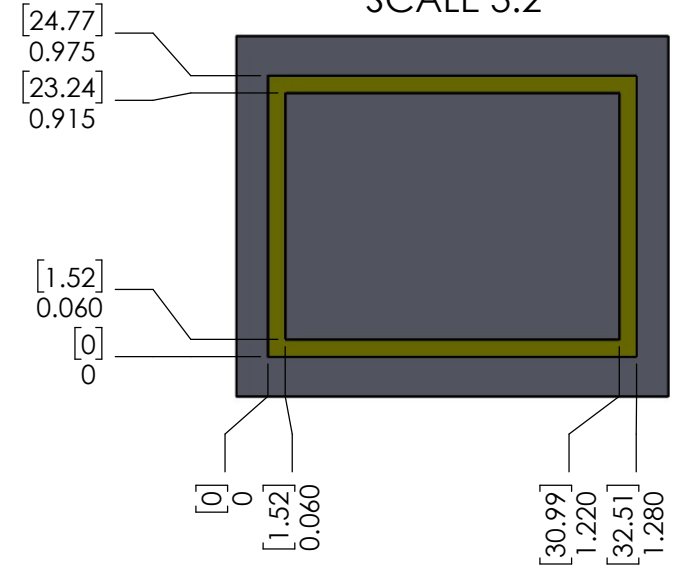



TRACE PATTERN
SCALE 3:2



RoHS Compliant		DIMENSIONS ARE IN INCHES [MILLIMETERS]		NAME		DATE			
THIRD ANGLE PROJECTION 		TOLERANCES:		DRAWN		TNC		10/12/2009	
DO NOT SCALE DRAWING		FRACTIONAL ±		CHECKED		ENG APPR.		MFG APPR.	
PROPRIETARY AND CONFIDENTIAL		ANGULAR: MACH ± 3 Degrees		MATERIAL:		Q.A.			
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ORBEL CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF ORBEL CORPORATION IS PROHIBITED.		TWO PLACE DECIMAL ± .015 [.381]		.010" [.254] NICKEL SILVER, 1/2 HARD		COMMENTS:			
		THREE PLACE DECIMAL ± .010 [.254]		FINISH:					
		WEIGHT: 0.075oz [2.122g]		SIZE		DWG NO.		REV.	
				A		G-0925SC1230-0100XC		01	
				SCALE: 2:1		CAGE CODE: 57DU2		SHEET 1 OF 1	

HOW TO ORDER BOARD LEVEL SHIELDING

The chart below is an easy-to-use reference on how Orbel BLS part numbers are created and used to order standard and custom board level shielding. Custom configurations that fall outside of our standard shield styles are also available.

Sample Part Number (Snap-Shield Bullzeze™): B-0750TB1125-0250XF - TPS



STANDARD FEATURES

PIN OPTIONS



Alignment Pin



Through-Hole Pin



Through-Hole Pin with Standoff



Castellation Edge



Straight Edge, No Pin

CORNER OPTIONS



Tight Corner




Louvered Corner




Welded Corner


ADDITIONAL OPTIONS



Trace Notch



Pick Target



Ventilation Holes



Logo or Part Number Marking

PERFORMANCE SPECS

Material Options

- Nickel Silver
- TPS: Tin-Plated Steel
- TPB: Tin-Plated Brass
- TPC: Tin-Plated Copper

Co-Planarity

- Smaller Shields: 0.004"
- Larger Shields: 0.008"

Material Thicknesses

- 0.010" (Standard)
- 0.008"
- 0.012"
- 0.015"

RoHS-Compliant

- Yes

Shielding Effectiveness

- Up to 60dB

Other material options include beryllium copper, phosphorus bronze, and stainless steel. Additional plating finishes available upon request.

All technical data presented herein is accurate to the best of our knowledge based on Orbel's most up-to-date testing information and material specs. This information is not presented as a warranty or guarantee and is not intended to be all-inclusive as to conditions of use.