



specifications



Base	Voltage	CRI	Lens	Heat Sink	L70 hours	Beam Angle	Ambient Temp (F)	Power Factor	UL listing	THD
BA15S	10-30 V ###	> 80	n/a	aluminum	50,000	360°	-40° - 113°	> 0.9	IP40	< 20%

select your lamp

Part Number	Color Temp	Consumption	Lumen Output	Efficacy	Dimensions
GI-1156C-W370-30	3000K	3.6 W	360	100 lm / W	0.95" x 2.65"
GI-1156C-C370-30	5000K	3.6 W	396	110 lm / W	0.95" x 2.65"

other

Warranty	Gross Weight	Case QTY
6 years	0.71 ounces	1 pcs

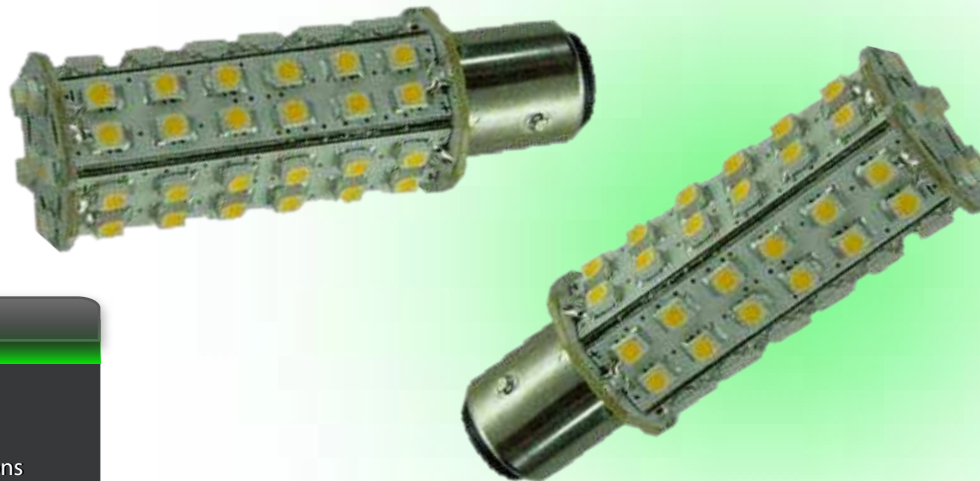

Features

- > No UV or IR radiation
- > 50,000 hour LED lifespan based on IES LM-80 results and TM-21 calculations
- > 90% energy savings compared to halogen lamps

Not all product variations listed on this page may be DLC qualified. Visit www.designlights.org/search to confirm qualification.

