



Que-2-TXT™
Questions?
scan to text us fast



3PC MAGNETIC STRIPS RETROFIT KIT

2'

fluorescent equal



specifications


Consumption	Voltage	CRI	Base	Lens	Heat Sink	L70 hours	Ambient Temp (F)	Power Factor	Mounting	THD	Beam Angle	Enclosed Fixture Rated
24W 3 strips	⚡ 100-277 V	83	hard-wire	N/A	aluminum	50,000	-4 - 104°	>0.9	magnetic strip screws	<25%	120°	yes

*select your lamp

Part Number	Color Temp	Dimmable	Efficacy	Lumens
GI-23TRK-W50D-UL4	3000K ⚡	0-10 V	132 lm / w	3,168
GI-23TRK-WD50-UL4	3500K ⚡	no	132 lm / w	3,168
GI-23TRK-D50-UL4	4000K ⚡	no	132 lm / w	3,168
GI-23TRK-C50-UL4	5000K ⚡	no	132 lm / w	3,168

other

Dimensions	Warranty	Case QTY
2 ft	6 years	30 pcs

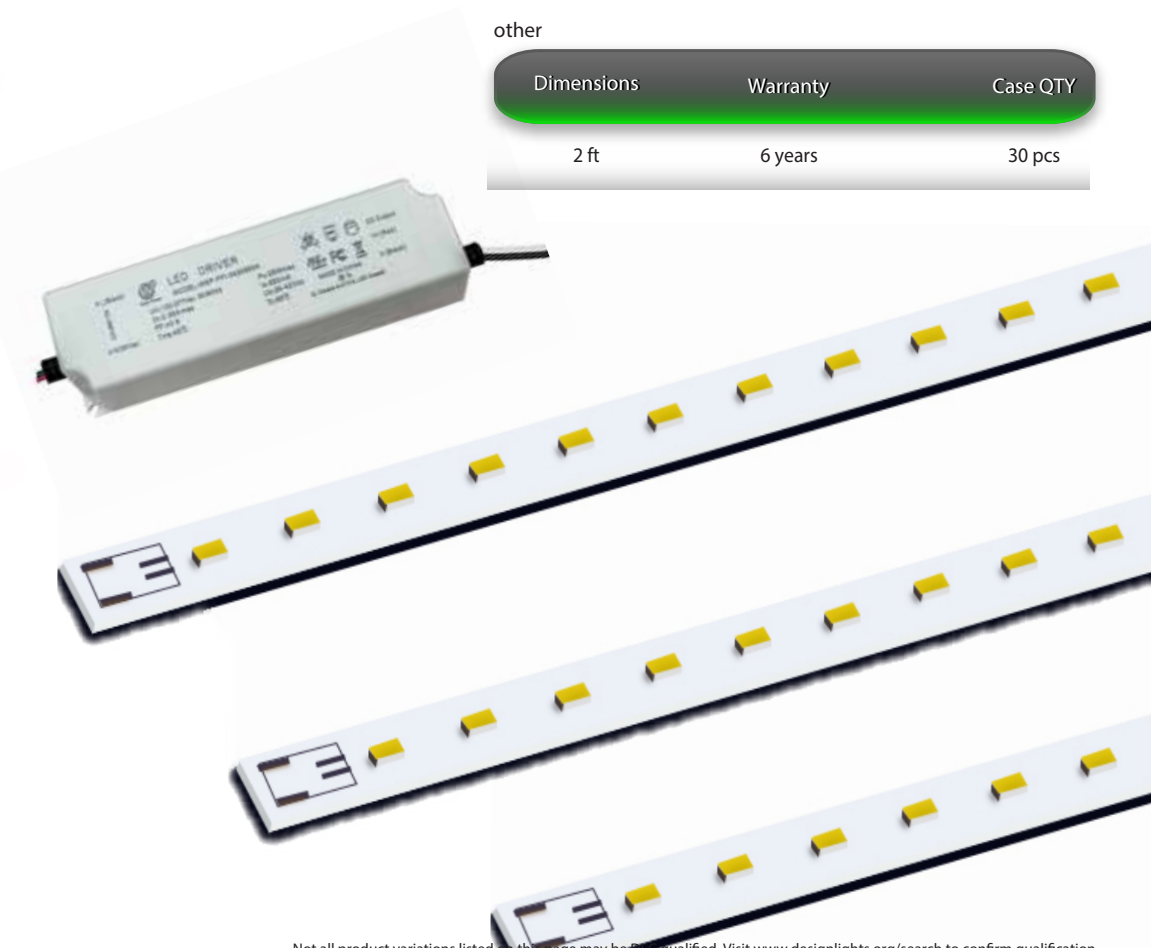

Features

- No UV or IR radiation
- No need for tombstones- installs using magnets & screws
- External driver, cables & accessories included



Not all product variations listed on this page may be UL qualified. Visit www.designlights.org/search to confirm qualification.



/greenignite
@greenignite



www.greenignite.com



info@greenignite.com



1-877-560-3779