


# GPS&GLONASS External Antenna Specification



<b>Antenna</b>	
<b>Frequency Range</b>	1575.42MHz±5 MHz 1610MHz±10MHz
<b>V.S.W.R</b>	1.5:1
<b>Band Width</b>	+/-5MHz-GPS +/-10MHz-GLONASS
<b>Impedence</b>	50 ohm
<b>Gain</b>	5dBic Based on 7×7cm ground plane
<b>Polarization</b>	RHCP
<b>LNA</b>	

<b>Frequency Range</b>	1595MHz±25 MHz
<b>DC Voltage</b>	2.7V/3.0V/3.3V/5.0V/3.0V to 5.0V/other
<b>Gain (Typical)</b>	30dB (Without cable +25°C±10°C)
<b>Noise Figure (Typical)</b>	1.5DB
<b>DC current</b>	11mA MAX
<b>Material</b>	
<b>Antenna</b>	Dielectric Ceramics
<b>PCB</b>	FR4
<b>Shielding</b>	Tinplate
<b>RF Cable</b>	RG174
	L=2000/3000/5000 or other
<b>RF Connector</b>	SMA/MCX/FAKRA or other
<b>Testing Conditions</b>	
<b>Working Temp</b>	-40°C~+80°C
<b>Storage Temp</b>	-45°C~+85°C
<b>Vibration</b>	Sine sweep 1g(0-p)
	10~55~10Hz each axis


Size drawing

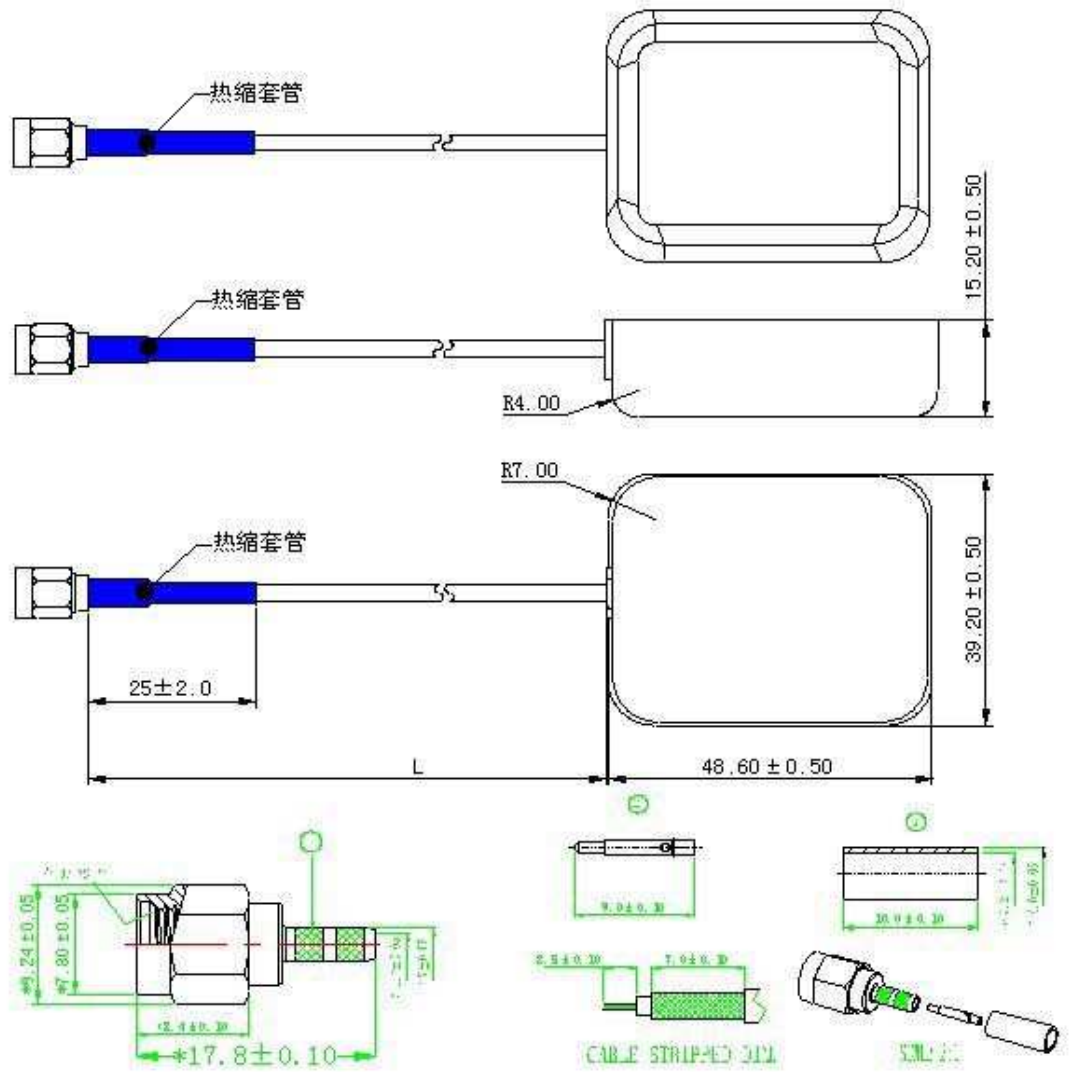

## LNA Test Plans



## Noise Figur Test Plans

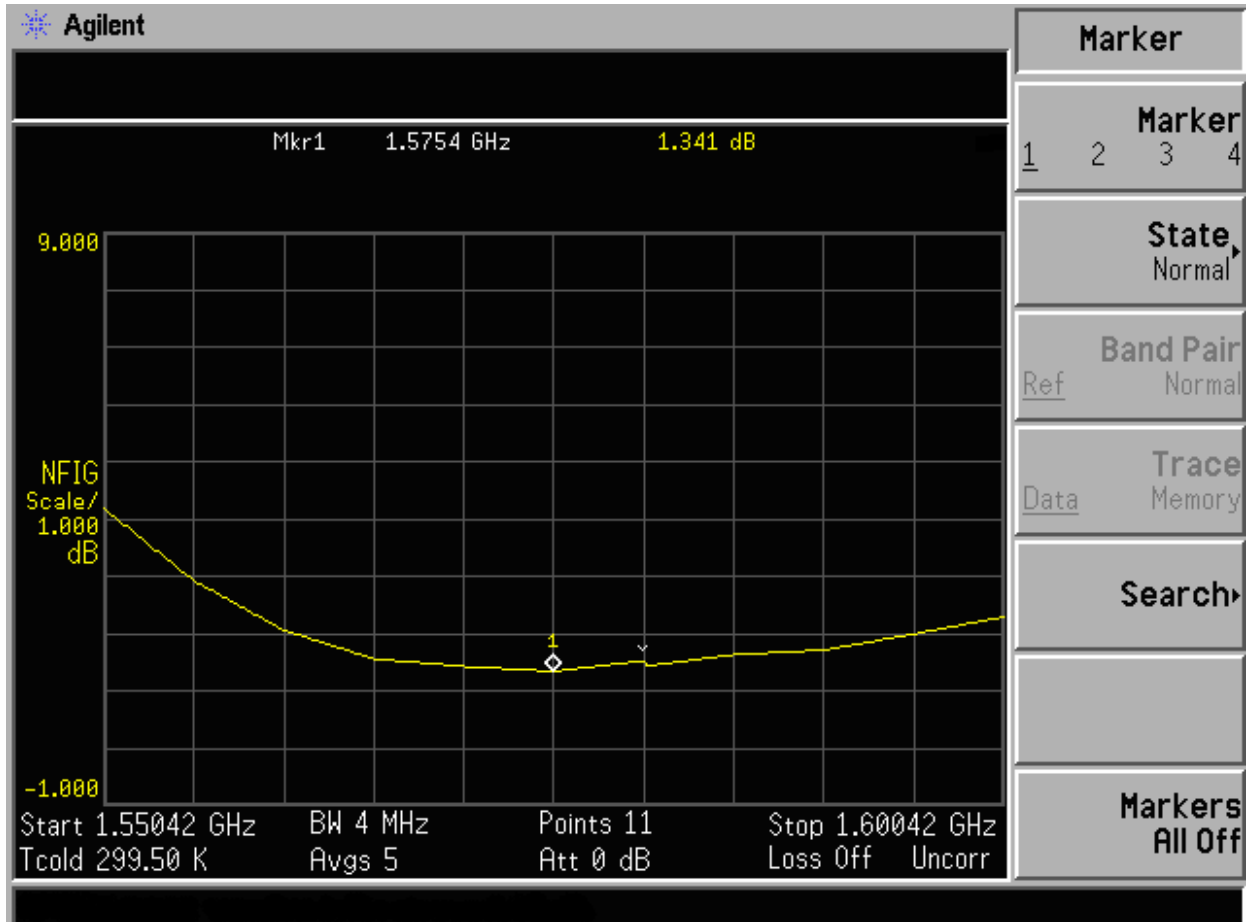

## Application

GLONASS is the abbreviation of Global Navigation Satellite System, it is similar to the satellite positioning system with the US GPS system, the GLONASS construction from the early 1980s by the former Soviet Union. This antenna combines GPS and GLONASS satellite signal receiving function, with high gain, low noise figure, and because of the small size is very easy to install. The GLONASS system is used for navigation and can be widely used in various grades and types of measurement applications, GIS applications and time-frequency applications.